

01 Jun 2008

Synthesis of Double-Input DC-DC Converters using a Single-Pole Triple-Throw Switch as a Building Block

Karteek Gummi

Mehdi Ferdowsi

Missouri University of Science and Technology, ferdowsi@mst.edu

Follow this and additional works at: https://scholarsmine.mst.edu/ele_comeng_facwork



Part of the [Electrical and Computer Engineering Commons](#)

Recommended Citation

K. Gummi and M. Ferdowsi, "Synthesis of Double-Input DC-DC Converters using a Single-Pole Triple-Throw Switch as a Building Block," *Proceedings of the 39th IEEE Annual Power Electronics Specialists Conference (2008, Rhodes, Greece)*, pp. 2819-2823, Institute of Electrical and Electronics Engineers (IEEE), Jun 2008.

The definitive version is available at <https://doi.org/10.1109/PESC.2008.4592373>

This Article - Conference proceedings is brought to you for free and open access by Scholars' Mine. It has been accepted for inclusion in Electrical and Computer Engineering Faculty Research & Creative Works by an authorized administrator of Scholars' Mine. This work is protected by U. S. Copyright Law. Unauthorized use including reproduction for redistribution requires the permission of the copyright holder. For more information, please contact scholarsmine@mst.edu.

Synthesis of Double-Input DC-DC Converters Using a Single-Pole Triple-Throw Switch as a Building Block

Kartek Gummi and Mehdi Ferdowsi, *Member, IEEE*

Missouri University of Science and Technology

Email: kgdn5@mst.edu and ferdowsi@mst.edu

Abstract—Hybridizing power electronic systems using an energy storage unit has gained popularity in transportation and power system applications. This task has traditionally been performed by using several independent power electronic converters. Multi-input converters, due to their reduced part count and improved efficiency, seem to be an advantageous option to replace the conventional converters. A few multi-input converter topologies have been reported in the literature; however, there is not a systematic approach to derive them. Furthermore, all possible topologies are not completely explored and it is difficult to derive new converters from the existing topologies. Hence, in this paper, a systematic approach to derive multi-input converters by using single-pole triple-throw switches as building blocks is presented.

I. INTRODUCTION

Double-input converters have gained popularity in power electronic application including power factor correction, photo voltaic systems, fuel cell systems, and hybrid electric vehicles. In these applications, utilizing energy storage is inevitable as the instantaneous values of input and output powers are not equal [1-6]. The energy storage unit can be comprised of batteries, capacitors, or ultracapacitors.

In order to combine the main source of power with the energy storage unit, either two independent converters or a single double-input converter can be used. The advantages of using a double-input converter are high efficiency, reduced component count, low cost, and control simplicity. In this paper a single-pole triple-throw (SPTT) switch is used as a building block to realize three new double-input dc-dc converters.

Fig. 1 shows the basic representation of an SPTT switch. At any given time, pole is connected to one and only one of the throws. An SPTT switch can be realized by using three single-pole single-throw (SPST) switches, as depicted in Fig. 2. It is worth mentioning that one and only one of the three switches is on at any time instant [7].

In this paper, SPTT switches are utilized as building blocks to create new double-input converter topologies. Three new double-input dc-dc converters are proposed in Section II. The operating modes of the new converters as well as their voltage transfer ratios are also presented. In Section III, the switch realization of the converters is discussed. The simulations results to verify the converter characteristics are presented in Section IV. Finally, Section V draws the concluding remarks.

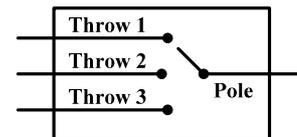


Fig. 1. Single-pole triple-throw switch (SPTT)

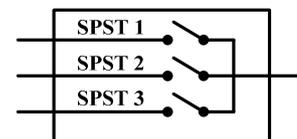


Fig. 2. SPTT switch realized using three SPST switches

II. DERIVATION OF NEW DOUBLE-INPUT CONVERTERS USING AN SPTT SWITCH

Figs. 3, 4, and 5 show the circuit diagram of the new double-input converters using an SPTT switch. These new converters are named double-input buck, double-input buckboost, and double-input buckboost-buck, respectively. It is worth mentioning that only one inductor is used in the structure of these converters. These converters are derived using basic power electronic converter topologies reported in the literature [8-17]. Fig. 6 shows the circuit diagram of the double-input buck converter using three SPST switches instead of a single SPTT switch. Voltage source V_1 can be made to deliver power by keeping the switch at position 1, voltage source V_2 can be made to deliver power by keeping the switch at position 2, and position 3 can be used for freewheeling purposes. Fig. 7 shows the switching patterns of three switches S_1 , S_2 , and S_3 . The pattern is true for all the possible arrangements of the converter. Three modes of operation that occur under unidirectional power flow are explained in Table I concentrating on the voltages across the inductor. Modes of operation for the double-input buckboost and buckboost-buck converters are given in Tables II and III.

One can observe from Fig. 7 that T_1 is the on time of switch S_1 , T_2 is the on time of switch S_2 , and T_3 is the on time of switch S_3 . Hence,

$$T_1 = d_1 * T, T_2 = d_2 * T, \text{ and } T_3 = d_3 * T. \quad (1)$$

Where T is the switching period and d_1 , d_2 , and d_3 are the duty cycles of switches S_1 , S_2 , and S_3 , respectively. Considering the double-input buck converter, one can write the following equations based on Fig. 7, Table I, and volt-second balance equation of the inductor.

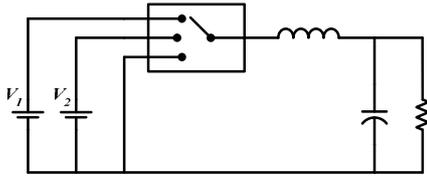


Fig. 3. Double-input buck converter using an SPTT switch.

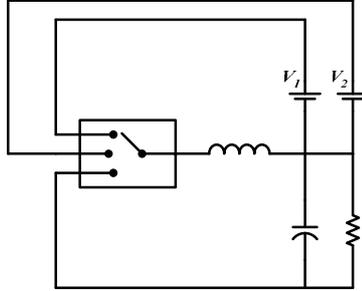


Fig. 4. Double-input buckboost converter using an SPTT switch.

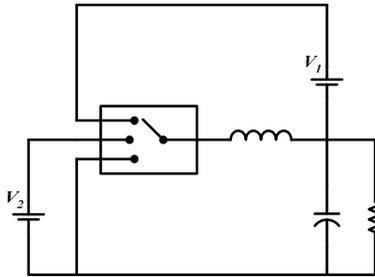


Fig. 5. Double-input buckboost-buck converter using an SPTT switch.

$$T_1 + T_2 + T_3 = T \quad (2)$$

$$T_1 * (V_1 - V_o) + T_2 * (V_2 - V_o) + T_3 * (-V_o) = 0 \quad (3)$$

This can be simplified as the following equation

$$V_1 * T_1 + V_2 * T_2 = V_o * (T_1 + T_2 + T_3) \quad (4)$$

Combining equations (1), (2), and (4) one can obtain the following equation which describes the relation between input and output voltages.

$$V_o = d_1 * V_1 + d_2 * V_2 \quad (5)$$

Voltage transfer ratios of the new double-input buckboost and buckboost-buck converters are given in (6) and (7), respectively.

$$V_o = \frac{d_1}{1-d_1-d_2} * V_1 + \frac{d_2}{1-d_1-d_2} * V_2 \quad (6)$$

$$V_o = \frac{d_1}{1-d_1} * V_1 + \frac{d_2}{1-d_1} * V_2 \quad (7)$$

III. SWITCH REALIZATION FOR THE NEW DOUBLE-INPUT CONVERTER TOPOLOGIES

In the double-input buck converter depicted in Fig. 6, SPST switches S_1 , S_2 , and S_3 can be realized using diodes and transistors. Switch realization depends on the input and output voltage levels as well as the power flow direction. Assuming that the power flow is from left to right (or $i_L > 0$), one can argue

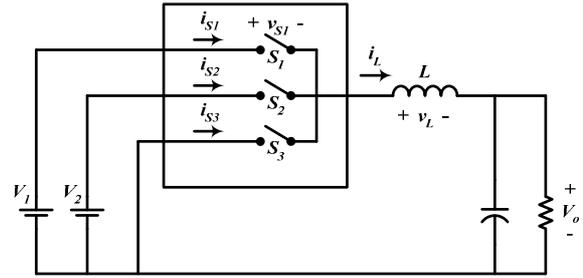


Fig. 6. Double-input buck converter using three SPST switches

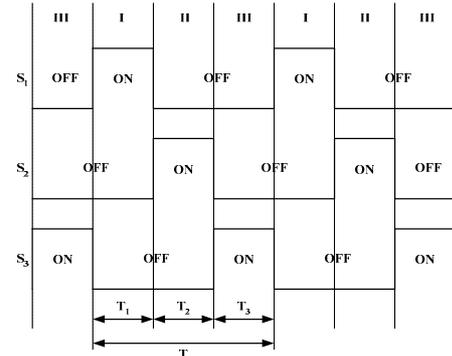


Fig. 7. Switching patterns of a double-input buck converter

TABLE I
VOLTAGE ACROSS THE INDUCTOR FOR DIFFERENT MODES OF OPERATION OF THE DOUBLE-INPUT BUCK CONVERTER

Mode	ON Switch	V_L	Note
I	S_1	$V_1 - V_o$	V_1 supplies energy
II	S_2	$V_2 - V_o$	V_2 supplies energy
III	S_3	$-V_o$	Freewheeling

TABLE II
VOLTAGE ACROSS THE INDUCTOR FOR DIFFERENT MODES OF OPERATION OF THE DOUBLE-INPUT BUCKBOOST CONVERTER

Mode	ON Switch	V_L	Note
I	S_1	V_1	V_1 supplies energy
II	S_2	V_2	V_2 supplies energy
III	S_3	$-V_o$	Freewheeling

TABLE III
VOLTAGE ACROSS THE INDUCTOR FOR DIFFERENT MODES OF OPERATION OF THE DOUBLE-INPUT BUCKBOOST-BUCK CONVERTER

Mode	ON Switch	V_L	Note
I	S_1	V_1	V_1 supplies energy
II	S_2	$V_2 - V_o$	V_2 supplies energy
III	S_3	$-V_o$	Freewheeling

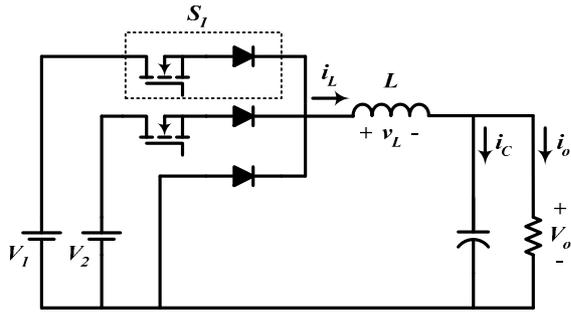


Fig. 8. Switch realization for the double-input buck converter (unidirectional power flow).

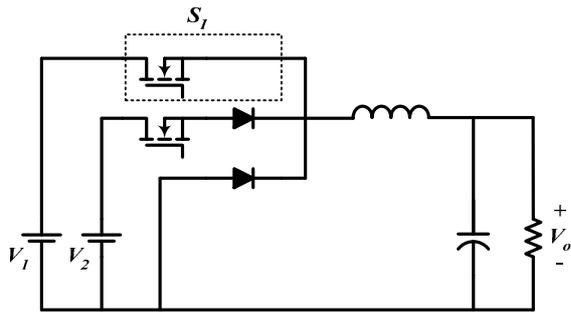


Fig. 9. Simplified double-input buck converter (if $V_1 > V_2$).

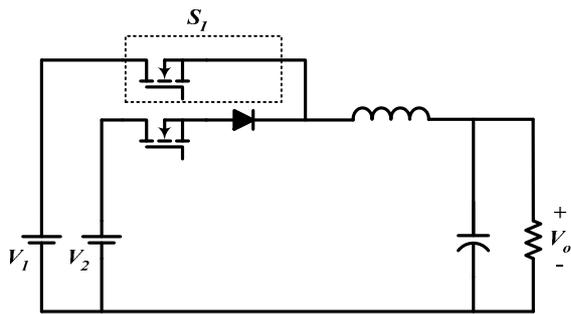


Fig. 10. Further simplified double-input buck converter with $V_1 > V_2$ and no mode III.

(If S_1 is on $\Rightarrow S_2$ and S_3 off) $\Rightarrow (i_{S1} > 0, V_{S2} = V_2 - V_1,$
and $V_{S3} = -V_1)$

(If S_2 is on $\Rightarrow S_1$ and S_3 off) $\Rightarrow (i_{S2} > 0, V_{S1} = V_1 - V_2,$
and $V_{S3} = -V_2)$

(If S_3 is on $\Rightarrow S_1$ and S_2 off) $\Rightarrow (i_{S3} > 0, V_{S1} = V_1,$ and
 $V_{S2} = V_2)$

Therefore, SPST switch S_1 conducts positive currents and has to block either a positive or a negative voltage depending on the magnitude of V_1 and V_2 ; hence, it can be replaced by a diode in series with a transistor. Similarly switch S_2 can be replaced by a diode in series with a transistor. Switch S_3 , which conducts positive current and opposes negative voltage, can be replaced by a diode. Therefore, the final circuit diagram of the double-input buck converter is shown in Fig. 8.

The structure of the double-input buck converter can be simplified to Fig. 9 if V_1 is greater than V_2 ($V_1 > V_2$). Similarly, the structure of the double-input buck converter can be further simplified if V_1 is greater than V_2 ($V_1 > V_2$) and mode III never occurs. The simplified converter in this case is shown in Fig. 10. This converter is similar to a ti-buck (two-input buck) converter [18-20].

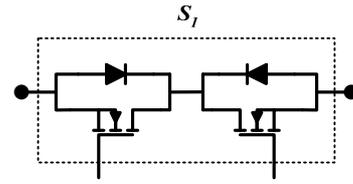


Fig. 11. Four-quadrant switch for bidirectional power flow.

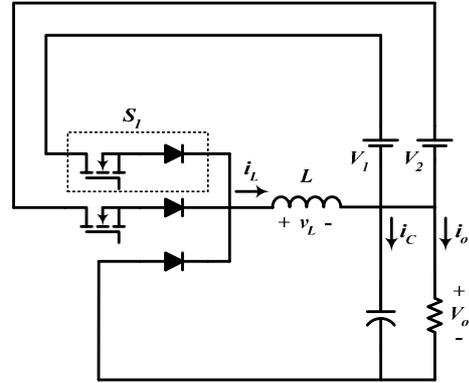


Fig. 12. Switch realization for the double-input buckboost converter (unidirectional power flow).

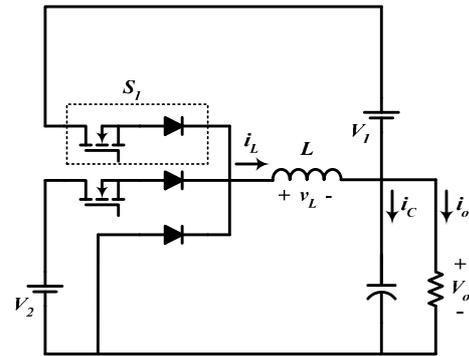


Fig. 13. Switch realization for the double-input buckboost-buck converter (unidirectional power flow).

In applications such as hybrid electric vehicles and photovoltaic systems one of the dc sources noted by V_1 or V_2 is a battery. Hence, bidirectional power flow to and from one of the sources (V_1 in this paper) is required. In this case, switch realization will be slightly different and switch S_1 in Fig. 6 needs to be replaced by a bidirectional switch realization as depicted in Fig. 11. One can obtain the switch realization of the bidirectional double-input buck converter by the following equations.

(If S_1 is on) $\Rightarrow (i_{S1} > 0 \text{ or } < 0)$

(If S_2 is on $\Rightarrow S_1$ is off) $\Rightarrow (V_{S1} > 0 \text{ or } < 0)$

As switch S_1 conducts either a positive or a negative current and also blocks either a positive or a negative voltage, it must be replaced by a four-quadrant switch (see Fig. 11).

Similarly, the unidirectional switch realization for the double-input buckboost and buckboost-buck converters results in the final circuits depicted in Figs. 12 and 13, respectively. These two topologies may also be further simplified similar to the discussion presented for the double-input buck converter.

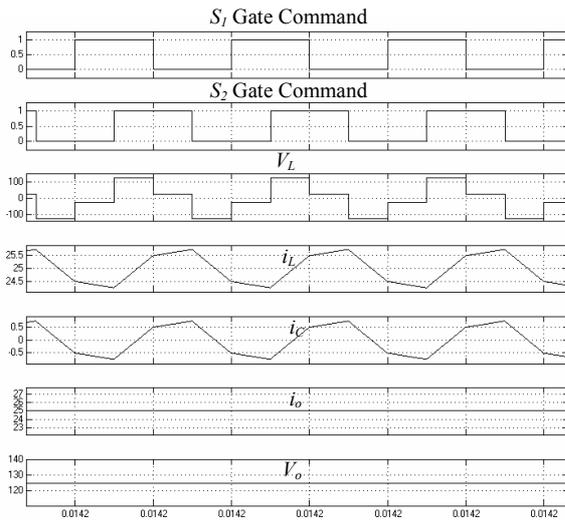


Fig. 14. Simulation results of the double-input buck converter.

IV. SIMULATION RESULTS OF THE NEW DOUBLE-INPUT CONVERTERS

Fig. 14, 15, and 16 shows the typical simulation results of the double-input buck, buckboost, and buckboost-buck converters, respectively. Two dc voltage sources $V_1 = 100\text{V}$ and $V_2 = 150\text{V}$ are used as input voltage sources. The switching commands for S_1 and S_2 have fixed duty ratios of 0.5 at a switching frequency of 100 kHz. From top to bottom are the waveforms of the switching commands for S_1 and S_2 , inductor voltage V_L , inductor current i_L , capacitor current i_C , output current i_o , and the output voltage. One can observe from the waveforms that the average value of the output voltage for the double-input buck converter is 125 V. This can also be obtained from the voltage transfer ratio described in (5). Similarly, the output voltages of the double-input buckboost and buckboost-buck converters are regulated at 500 V and 250 V, respectively.

V. CONCLUSION

Three new double-input converters are presented in this paper using a single-pole triple-throw switch as building block. All of the proposed converters use only one inductor which results in reduced size and parts count of the system. The proposed converters can be used in ultracapacitor enhancement of battery packs in automotive applications or hybridizing photovoltaic or fuel cell systems. Simulation and analytical results perfectly agree with each other.

REFERENCES

- [1] C. C. Chan, "The state of the art of electric and hybrid vehicles," *Proc. IEEE*, vol. 90, no. 2, pp. 247-275, Feb. 2002.
- [2] C. C. Chan, "The state of the art of electric, hybrid, and fuel cell vehicles," *Proc. IEEE*, vol. 95, pp. 704-718, April 2007.
- [3] C. C. Chan, "An overview of electric vehicle technology," *Proc. IEEE*, vol. 81, pp. 1202-1213, Sept. 1993.
- [4] C. C. Chan, K. T. Chau, "An overview of power electronics in electric vehicles," *IEEE Transactions on Industrial Electronics*, vol. 44, Feb. 1997, pp. 3-13.
- [5] M. K. C. Marwali, N. M. Maricar, S. K. Shrestha, "Battery capacity tests evaluation for stand-alone photovoltaic systems," *IEEE Power Engineering Society Winter Meeting*, vol. 1, pp. 540-545, Jan. 2000.

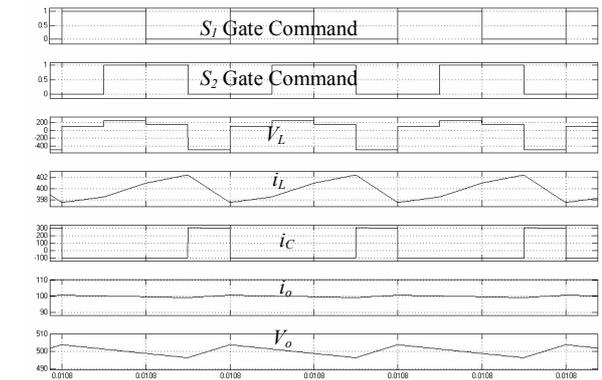


Fig. 15. Simulation results of the double-input buckboost converter.

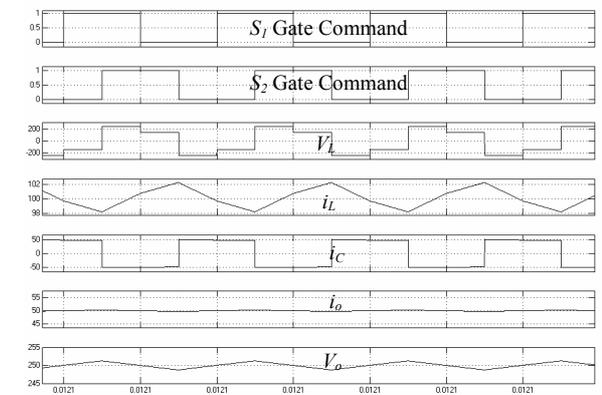


Fig. 16. Simulation results of the double input buckboost-buck converter.

- [6] M. Glavin, W. G. Hurley, "Battery management system for solar energy applications," *IEEE Universities Power Engineering Conference*, vol. 1, Sept. 2006, pp. 79-83.
- [7] P. Wood, *Switching Power Converters*. Van Nostrand Reinhold Co, 1981, Ch. 3.
- [8] A. D. Napoli, F. Crescimbeni, S. Rodo, L. Solero, "Multiple input dc-dc power converter for fuel-cell powered hybrid vehicles," *IEEE Power Electronics Specialists Conference*, vol. 4, June 2002, pp. 1685-1690.
- [9] A. D. Napoli, F. Crescimbeni, L. Solero, F. Carricchi, F. G. Capponi, "Multiple-input dc-dc power converter for power-flow management in hybrid vehicles," *IEEE Conference on Industry Applications*, vol. 3, Oct. 2002, pp. 1578-1585.
- [10] H. Tao, A. Kotsopoulos, J.L. Duarte, M.A.M. Hendrix, "Multi-input bidirectional dc-dc converter combining dc-link and magnetic-coupling for fuel cell systems," *IEEE Industry Applications Conference*, vol. 3, 2-6 Oct. 2005, pp. 2021-2028.
- [11] H. Tao, A. Kotsopoulos, J. L. Duarte, M. A. M. Hendrix, "Family of multi-port bidirectional dc-dc converters," *IEEE Proc. on Electric Power Applications*, vol. 153, pp. 451 - 458, May 2006.
- [12] K. P. Yalamanchili, M. Ferdowsi, and K. Corzine, "New double-input dc-dc converters for automotive applications," *IEEE Vehicular Power and Propulsion Conference*, 2006.
- [13] K. P. Yalamanchili, "Multi-input dc-dc converters for combined energy storage systems in hybrid electric vehicles," M. S. Thesis, University of Missouri-Rolla, Dec. 2006.
- [14] N. D. Benavides, P. L. Chapman, "Power budgeting of a multiple-input buck-boost converter," *IEEE Transactions on Power Electronics*, vol. 20, pp. 1303-1309, Nov. 2005.

- [15] B. G. Dobbs, P. L. Chapman, "A multiple-input dc-dc converter topology," *IEEE Power Electronics Letters*, vol. 1, pp. 6-9 March 2003.
- [16] N. D. Benavides, T. Eram, P. L. Chapman, "Ripple correlation control of a multiple-input dc-dc converter," *IEEE Power Electronics Specialists Conference*, 2005, pp. 160-164.
- [17] A. Davoudi, J. Jatskevich, and P. L. Chapman, "Parametric average-value modeling of multiple-input buck converters," *IEEE Canadian Conference*, 22-26 April 2007, pp. 990-993
- [18] J. Sebastian, P. Villegas, M. M. Hernando, S. Ollero, "High quality flyback power factor corrector based on a two input buck post-regulator," *IEEE Applied Power Electronics Conference*, Feb. 1997, vol. 1, pp. 23-27.
- [19] S. B. Galateanu, "Buck-flyback dc-dc converter," *IEEE Transactions on Aerospace and Electronic Systems*, vol. 24, pp. 800-807, Nov. 1988.
- [20] G. Spiazzi, S. Buso, "Power factor preregulators based on combined buck-flyback topologies," *IEEE Transactions on Power Electronics*, vol. 15, pp. 197-204, March 2000.