

May 24th - May 29th

# An Insight to the Effect of Initial Static Shear Stress on the Liquefaction of Sands

S. Mohsen Haeri

*Sharif University of Technology, Iran*

Mehdi Pouragha

*Sharif University of Technology, Iran*

Follow this and additional works at: <http://scholarsmine.mst.edu/icrageesd>



Part of the [Geotechnical Engineering Commons](#)

---

## Recommended Citation

Haeri, S. Mohsen and Pouragha, Mehdi, "An Insight to the Effect of Initial Static Shear Stress on the Liquefaction of Sands" (2010). *International Conferences on Recent Advances in Geotechnical Earthquake Engineering and Soil Dynamics*. 6. <http://scholarsmine.mst.edu/icrageesd/05icrageesd/session01b/6>

This Article - Conference proceedings is brought to you for free and open access by Scholars' Mine. It has been accepted for inclusion in International Conferences on Recent Advances in Geotechnical Earthquake Engineering and Soil Dynamics by an authorized administrator of Scholars' Mine. This work is protected by U. S. Copyright Law. Unauthorized use including reproduction for redistribution requires the permission of the copyright holder. For more information, please contact [scholarsmine@mst.edu](mailto:scholarsmine@mst.edu).



Fifth International Conference on

## Recent Advances in Geotechnical Earthquake Engineering and Soil Dynamics and Symposium in Honor of Professor I.M. Idriss

May 24-29, 2010 • San Diego, California

# AN INSIGHT TO THE EFFECT OF INITIAL STATIC SHEAR STRESS ON THE LIQUEFACTION OF SANDS

**S. Mohsen Haeri**

Professor, Sharif University of Technology  
Tehran, Iran, [smhaeri@sharif.edu](mailto:smhaeri@sharif.edu)

**Mehdi Pouragha**

Graduate Student, Sharif University of Technology  
Tehran, Iran, [pouragha@mehr.sharif.edu](mailto:pouragha@mehr.sharif.edu)

## ABSTRACT

The effect of initial static shear stress on cyclic behavior of sands has been the concern of many researchers for more than five decades. This study includes the results of a set of cyclic simple shear tests carried out on a uniform sand with relative densities of 20%, 40%, and 60%, under three different initial normal stresses of 50, 150, and 250 kPa. All tests were performed under constant volume condition. Results show that the behavior of sands due to initial static shear stress, is controlled by two contradictive elements: first one relates to the increasing dynamic shear modulus due to the initial static shear stress that ends in greater liquefaction resistance, and the second relates to the amount of irreversible shear strains which increases with greater value of driving shear stress and consequently reduces the liquefaction resistance. These elements form alternations in the value of  $K_{\alpha}$ ; being increased in some zones and decreased in others. New trends observed in the variation of liquefaction resistance due to the initial static shear stress, led the authors to define new parameters which can interpret the failure conditions and complexities of the behavior.

## INTRODUCTION

The effect of initial static shear stress (ISSS) on the liquefaction potential of sand first was noticed after Niigata earthquake in 1964 where a medium dense sand beneath an oil tank did not liquefy while numerous liquefaction cases were reported for such sand in other conditions (Watanabe, 1966). Another example happened for dense sand during 1978 Miyagiken-Okii earthquake in which no settlement was observed under reservoirs (Ishihara et al. 1980).

Early researches on the effect of initial static shear on the liquefaction potential of sand in 1970's and early 1980's, like what is available from Lee et al. (1967), Seed et al. (1973), Vaid et al. (1979), Tatsuoka et al. (1982), and Seed (1983) give evidences for an increase in liquefaction resistance due to an increase in initial static shear stresses for samples with moderate relative densities. But further researchers, such as Vaid et al. (1983), Vaid and et al. (1985), and Szerdy (1986) working on different sands with a wider range of initial conditions like relative density and confining pressure, showed that the presence of static shear stress would cause more complicated effect on the liquefaction potential (Harder et al. 1997). In the present study, this effect is investigated through cyclic simple shear tests on the Bablosar sand.

## DEFINITIONS

Since new parameters and new approach to interpret the results are used in this study, parameters are defined separately in this section.

- $\alpha$ : is the Initial Static Shear Stress Ratio which is defined as  $\tau_s/\sigma_{v0}$  where  $\tau_s$  is the Initial Static Shear Stress and  $\sigma_{v0}$  is the Normal Consolidation Stress.
- Failure Criteria: Three distinct criteria were used to define the failure in tests; First one is the cancellation of the normal pressure (i.e.  $\sigma_v=0$ , which is representative for 100% excess pore pressure ratio in undrained tests). Second criteria is defined as exceeding 5% Shear Strain Double Amplitude (DA) in a cycle ( $\gamma_{DA}>5\%$ ). Third criteria is referred to approaching 5% cumulative shear strain level during cyclic loading stage ( $\gamma_{ac}>5\%$ ). The first cycle in which one of the mentioned criteria is approached is called the failure cycle and Shown by  $N_f$ .
- $\tau_L$ : is the Liquefaction Resistance of sand and is defined as the Cyclic Shear Stress Amplitude (CSS) in stress controlled test, which cause the failure in 15<sup>th</sup> cycle.

▪  $K_\alpha$ : is the Liquefaction Resistance Ratio which is defined as the proportion of Liquefaction Resistance for a sample with the Initial Static Shear Stress, to the Liquefaction Resistance for the same sample with  $\alpha=0$ :

$$K_\alpha = \frac{(\tau_L)_\alpha}{(\tau_L)_{\alpha=0}} \quad (1)$$

▪  $(G)_n$ : is the Cyclic Shear Modulus for  $(n)^{th}$  cycle and can be calculated for each cycle from dividing the Cyclic Shear Stress Double Amplitude (which is constant in stress controlled tests) by the Cyclic Shear Strain Double Amplitude (DA) in the same cycle.

▪  $(R_{ex})_n$ : is the Shear Strain Expansion Factor for  $(n)^{th}$  cycle and can be calculated from dividing the difference between Shear Strain Double Amplitude in  $(n+1)^{th}$  cycle and Shear Strain Double Amplitude in  $(n-1)^{th}$  cycle, by the Shear Strain Double Amplitude in  $(n)^{th}$  cycle (see Fig. 1):

$$(R_{ex})_n = \frac{(n+1)^{th} \text{ cycle width} - (n-1)^{th} \text{ cycle width}}{n^{th} \text{ cycle width}} \quad (2)$$

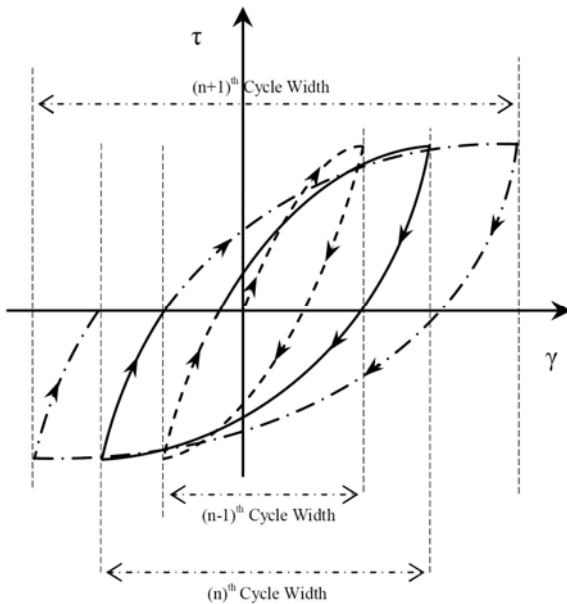


Fig. 1. Schematic definition of  $(R_{ex})_n$ .

▪  $(R_{ac})_n$ : is the Shear Strain Accumulation Factor for  $(n)^{th}$  and can be calculated for each cycle from dividing the Cycle Center Shift (Shown in Fig. 2) by the Cyclic Shear Strain Double Amplitude in the same cycle:

$$(R_{ac})_n = \frac{\text{Cycle Center Shift for } (n)^{th} \text{ cycle}}{n^{th} \text{ cycle width}} \quad (3)$$

▪  $(G)_{10}$ ,  $(R_{ex})_{10}$  and  $(R_{ac})_{10}$ : respectively are the Cyclic Shear Modulus, Shear Strain Expansion Factor and Shear Strain

Accumulation Factor, all calculated in  $10^{th}$  cycle of a specific cyclic loading test.

▪  $(G)_{L10}$ ,  $(R_{ac})_{L10}$  and  $(R_{ex})_{L10}$ : respectively are the Cyclic Shear Modulus, Shear Strain Expansion Factor and Shear Strain Accumulation Factor, all calculated in  $10^{th}$  cycle, when the failure occurred in  $15^{th}$  cycle.

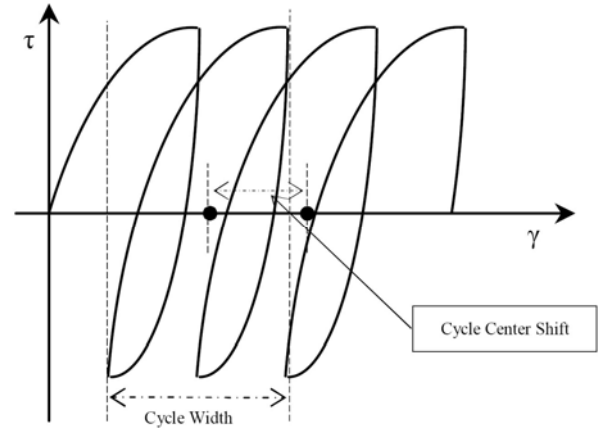


Fig. 2. Schematic definition of  $(R_{ac})_n$ .

## TEST PROGRAM

As recent researchers have evidenced, direct shearing tests are more reliable for modeling the large scale cyclic behavior of sands (Ishihara 1993, Hosono et al. 2004.). So stress controlled cyclic simple shear tests were employed in this study. All tests were performed under constant volume condition which is more suitable when large number of tests is programmed. Tests were conducted on Babolsar sand samples, of which index properties are presented in table 1.

Table 1. Index properties of Babolsar Sand

Specific Gravity, $G_s$	2.74
Maximum void ratio, $e_{max}$	0.77
Minimum void ratio, $e_{min}$	0.56
Effective grain size, $D_{10}$ (mm)	0.14
Mean grain size, $D_{50}$ (mm)	0.22
Uniformity coefficient, $C_u$	1.8
Coefficient of gradation, $C_c$	1.0

The specimens were cylindrical with 70 mm diameter and 20 mm height. Because of the wide range of approachable porosity and the consistency with the constant volume tests, Moist Tamping method was applied to prepare samples (Ishihara 1993, Lee et al. 1967). Samples were initially consolidated under normal stress and then having the normal load constant, initial static shear stress was applied.

Afterwards, the sample was tested under stress controlled cyclic simple shear loads with a frequency of 1 Hz. The cyclic stage was performed under constant volume condition in which the variation of normal stress ( $\sigma_v$ ) can be a representative for excess pore pressure changes in undrained tests. Table 2 presents the value of initial conditions considered in the tests in which  $D_r$  is relative density after consolidation,  $\sigma_{v0}$  is initial normal stress, and  $\alpha$  is the initial static shear stress ratio defined in previous section.

For each set of initial conditions, at least three distinct tests with different cyclic shear stresses were conducted which leads to more than 180 distinct experiments.

## TEST RESULTS

Figure 3 and 4 illustrate the hysteresis graph for two selected set of tests. Figure 3 shows the results for tests with  $\sigma_{v0}=140$  kPa,  $D_r=40\%$ , and  $\alpha=0.0$ , and three various Cyclic Shear Stress Amplitude (CSS), and figure 4 is for samples with the same initial condition but  $\alpha=0.3$ .

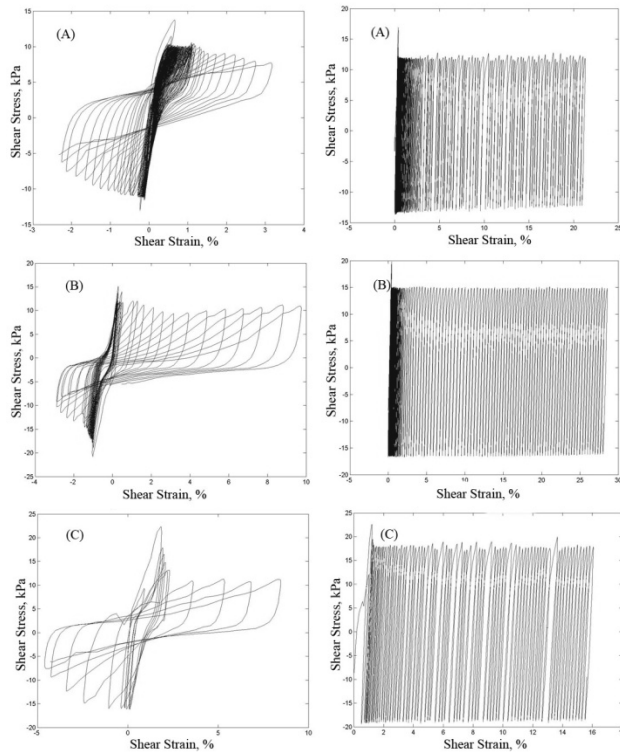


Fig. 3. Hysteresis graphs for sample with  $D_r=40\%$ ,  $\sigma_v=150$  kPa,  $\alpha=0.0$ , and Cyclic Shear Stress of; A) 10 kPa, B) 12 kPa, C) 15 kPa

Fig. 4. Hysteresis graphs for sample with  $D_r=40\%$ ,  $\sigma_v=150$  kPa,  $\alpha=0.3$ , and Cyclic Shear Stress of; A) 12 kPa, B) 15 kPa, C) 18 kPa

Figures like these, show that applying ISSS would cause obvious changes in hysteresis behavior of samples; Cyclic Shear Strain Amplitude increases during the cyclic loading

stage for samples with  $\alpha=0$  which indicate the degradation of Cyclic Shear Strength, whereas the accumulation of irreversible shear strain is dominant in the presence of ISSS. The variation of Normal Stress Ratio (Normal Stress at any time divided by the Initial Normal Stress) for these tests are also illustrated in figures 5 and 6. These figures show that the cancellation of Normal Stress (representative for 100% excess pore pressure) is not approached in presence of ISSS which is reported by other researchers too (Vaid et al. 1983).

Table 2. Initial conditions considered in experiments

Initial normal stress, $\sigma_{v0}$	50, 150, 250 kPa
Relative Density, $D_r$	20%, 40%, 60%
Initial static shear stress ratio, $\alpha$	0.0, 0.05, 0.1, 0.2, 0.3

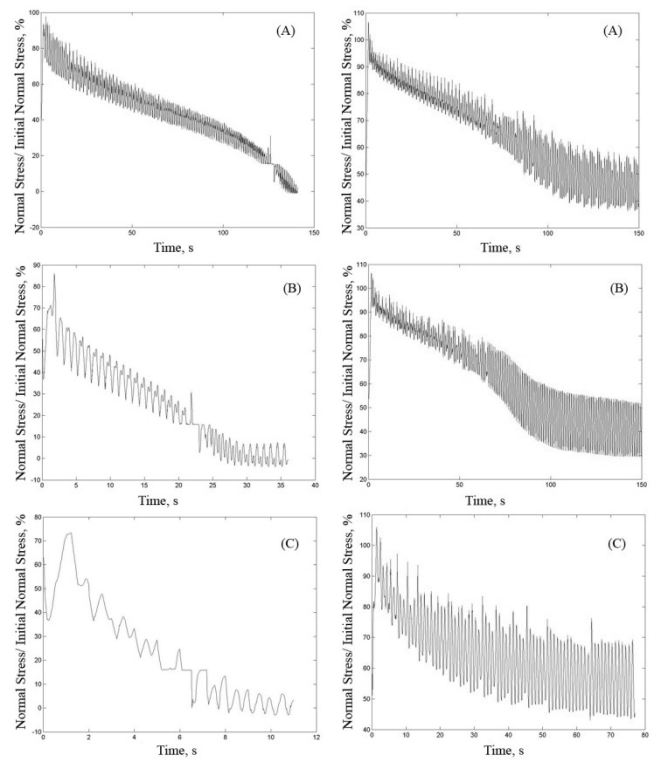


Fig. 5. Variation of Normal Stress Ratio for sample with  $D_r=40\%$ ,  $\sigma_v=150$  kPa,  $\alpha=0.0$ , and Cyclic Shear Stress of; A) 10 kPa, B) 12 kPa, C) 15 kPa

Fig. 6. Variation of Normal Stress Ratio for sample with  $D_r=40\%$ ,  $\sigma_v=150$  kPa,  $\alpha=0.3$ , and Cyclic Shear Stress of; A) 10 kPa, B) 12 kPa, C) 15 kPa

Regarding 3 failure criteria defined in previous section, the failure cycle number for each criterion was drawn out for each test and the prior one is reported as the Failure Cycle Number ( $N_f$ ). Table 3 contains these results for the mentioned tests conditions. As mentioned before, applying ISSS would cause the Accumulative Shear Strain Level ( $N_{ac}$ ) to become controlling criterion.

Table 1: Approaching Cycle Number for different failure criteria

Sample Name	Normal Stress Ratio=0	Cycle Width > 5 %	Cumulative Strain > 5 %	Controlling Criteria	Min. Normal Stress Ratio %	Failure Cycle Number
150-40%-0.0-10	136	140	N.R*	1**	1.03***	136
150-40%-0.0-12	27	28	32	1	-3.84	27
150-40%-0.0-15	8	8	9	1,2	-3.01	8
150-40%-0.3-12	N.R	N.R	94	2	36.321	94
150-40%-0.3-15	N.R	N.R	85	2	29.401	85
150-40%-0.3-18	N.R	N.R	29	2	43.078	29

\* N.R: Criterion is not reached

\*\* 1: Normal Stress Ratio=0, 2: Cycle Strain Double Amplitude >5%, 3: Cumulative Shear Strain >5%

\*\*\* Minimum Normal Stress Ratio reached during the test

Test results also reveal that the first two criteria (cancellation of normal stress and 5% shear strain double amplitude) take place in identical or very close cycle numbers which is also reported by other researchers like Hosono et al. (2001), and Rahhal et al. (2000).

The data obtained from the cyclic tests will lead to graphs like figure 7 which illustrate the variation of Failure Cycle Number ( $N_f$ ) with cyclic shear stress amplitude (CSS) for test conditions presented in Table 3. According to the previous section, Liquefaction Resistance ( $\tau_l$ ) and  $K_\alpha$  is calculated for each set of initial conditions. Gathering all the results, graphs shown in figure 8 are formed in which the variation of  $K_\alpha$  due to Initial Static Shear Stress Ratio ( $\alpha$ ) for various values of Initial Normal Stress ( $\sigma_{v0}$ ) and Relative Density ( $D_r$ ) is shown. A general trend can be denoted with the increase in  $K_\alpha$  due to an increase in  $\alpha$  for samples under an Initial Normal Stress of 50 kPa. However more complex behavior can be seen for Initial Normal Stress of 150 kPa and 250 kPa.

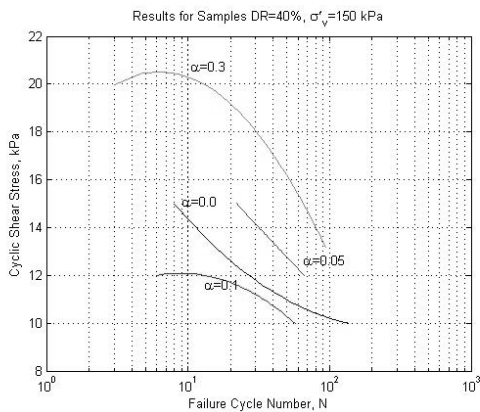


Fig. 7. Variation of Failure Cycle Number ( $N_f$ ) with cyclic shear stress amplitude (CSS) for test with Initial Normal Stress of 150 kPa and Relative Density of 40% and various Initial Static Shear Stress Ratio ( $\alpha$ )

Approaching to the considered failure criteria, three different elements seem to be more influential and need special attention to pay to:

The first element is the order of Cyclic Shear Strain Amplitude in cycles; wider Strain amplitude would cause faster approach to the first and second failure criteria (i.e.  $\sigma_v=0$  and  $\gamma_{DA}>5\%$ ).  $(G)_{L10}$ , as defined in Definition Section, would be a suitable representative for this element. The variation of this parameter due to  $\alpha$  is shown in figure 9 for different values of Initial Normal Stress ( $\sigma_{v0}$ ) and Relative Density ( $D_r$ ).

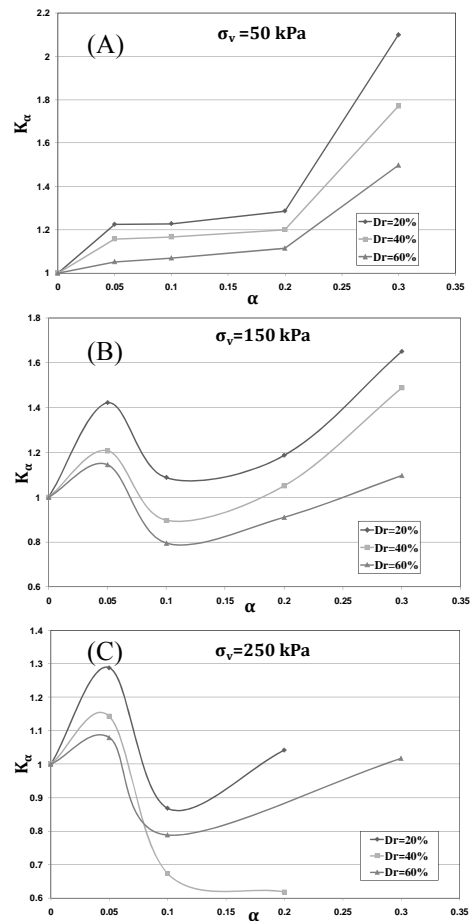


Fig. 8. Variation of  $K_\alpha$  due to Initial Static Shear Stress Ratio ( $\alpha$ ) for various values of Relative Density ( $D_r$ ) and Initial Normal Stress ( $\sigma_{v0}$ ) of; A) 50 kPa, B) 150 kPa, and C) 250 kPa

The second element is the rate of Cyclic Shear Strength Degradation during the cyclic loading stage which causes the greater cyclic shear strain amplitude in consequent cycles and cycles *Expand* in hysteresis graph during the cyclic loading.

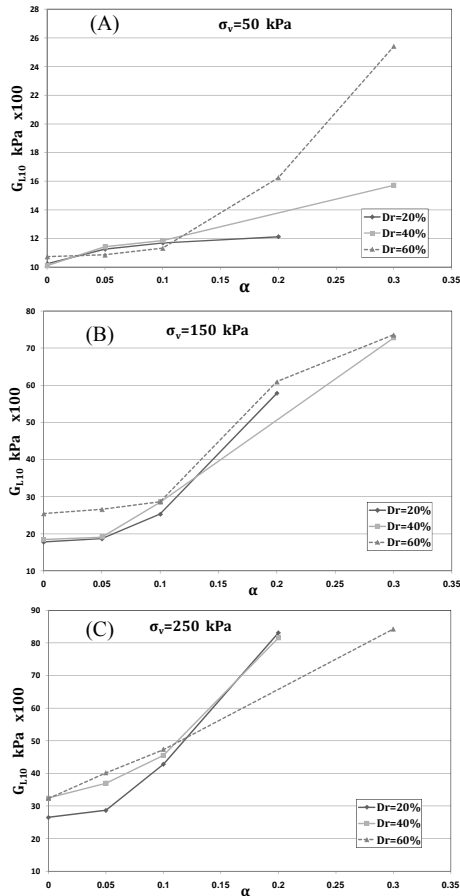


Fig. 9. Variation of  $(G)_{L10}$  due to Initial Static Shear Stress Ratio ( $\alpha$ ) for various values of Relative Density ( $D_r$ ) and Initial Normal Stress ( $\sigma_{v0}$ ) of: A) 10 kPa, B) 12 kPa, C) 15 kPa

The procedure defined in Definition Section was employed to calculate  $(R_{ex})_{L10}$  which expresses the rate of Cyclic Shear Amplitude Expansion and would be a well representative for Shear Strength Degradation in Stress controlled tests. The variation of this parameter due to  $\alpha$  is shown in figure 10 for different values of Initial Normal Stress ( $\sigma_{v0}$ ) and Relative Density ( $D_r$ ).

The third element affecting the failure procedure is the rate of accumulation of irreversible cyclic shear strain of which greater value would ease the approach to the third failure criterion (i.e.  $\gamma_{ac} > 5\%$ ). This element is also presented by the new defined parameter  $(R_{ac})_{L10}$  calculated as defined in Definition Section and its variation due to  $\alpha$  is shown in figure 11 for different values of Initial Normal Stress ( $\sigma_{v0}$ ) and Relative Density ( $D_r$ ).

## DISCUSSION

As mentioned before, for an initial normal stress of 50 kPa a general trend can be denoted with the increase in  $K_\alpha$  due to an increase in  $\alpha$ . Previous researchers rarely worked on the  $\alpha$ - $K_\alpha$  relation for low confinement such as  $\sigma_{v0} = 50$  kPa (which is relatively representative for a confining pressure of 30 kPa in triaxial tests). Thus, comparison would be almost inconvenient in this case. Although previous studies report a decrease in liquefaction resistance in presence of initial static driving shear for loose sandy soils, but low confinement can make the loose sand to behave like a dilative soil.

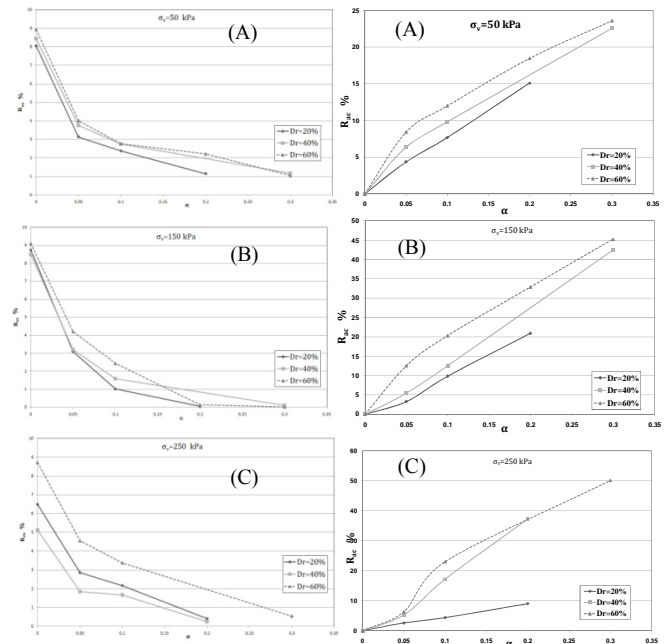


Fig. 10. Variation of  $(R_{ex})_{L10}$  due to Initial Static Shear Stress Ratio ( $\alpha$ ) for various values of Relative Density ( $D_r$ ) and Initial Normal Stress ( $\sigma_{v0}$ ) of: A) 10 kPa, B) 12 kPa, C) 15 kPa

Fig. 11. Variation of  $(R_{ac})_{L10}$  due to Initial Static Shear Stress Ratio ( $\alpha$ ) for various values of Relative Density ( $D_r$ ) and Initial Normal Stress ( $\sigma_{v0}$ ) of: A) 10 kPa, B) 12 kPa, C) 15 kPa

According to the graphs in figure 8, the behavior of  $K_\alpha \sim \alpha$  graphs can be divided to three distinct zone shown schematically in figure 12; during the first zone,  $K_\alpha$  increases moving from  $\alpha = 0.0$  to  $\alpha = 0.05$  (A to B), but in the second zone  $K_\alpha$  decreases (or stay relatively constant) moving from  $\alpha = 0.05$  to  $\alpha = 0.1$  (B to C), and at last in the third zone  $K_\alpha$  increases again for  $\alpha > 0.1$  (C to D). In further lines, we try to explain these complex behaviors.

First Zone,  $0.00 < \alpha < 0.05$  (A to B):

The Liquefaction Resistance Ratio ( $K_\alpha$ ) increases as  $\alpha$  increases from zero to a small value ( $\alpha = 0.05$  in this study). This happens as a result of a change in controlling failure criterion. Regarding figure 11, for the point A (i.e.  $\alpha = 0.0$ ),

$(R_{ac})_{L10}=0$  which means no strain accumulation occurs when ISSS is not applied, and  $(R_{ex})_{L10}$  has its maximum value (figure 10) which means the strength degradation and shear strain amplitude expansion is faster and consequently the first two failure criteria are dominant at the point A. Moving from point A to point B (i.e.  $\alpha=0.0$  to  $\alpha=0.05$ ), however the change of  $(G)_{L10}$  value is negligible (see figure 9), a meaningful change in  $(R_{ac})_{L10}$  and  $(R_{ex})_{L10}$  occurs; applying ISSS caused a sudden fall in  $(R_{ex})_{L10}$  which would end in slower rate of shear amplitude expansion (figure 10). On the other hand, the noticeable increase in  $(R_{ac})_{L10}$  value (figure 11), makes the shear strain accumulation procedure to be dominant. These two elements, together, impose a change in failure criterion and the third failure criterion will be controlling in this point. This change in controlling failure approach ended in a raise in  $K_\alpha$  value.

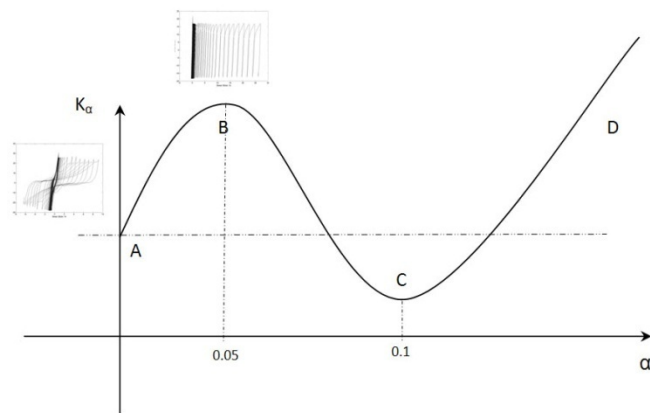


Fig. 12. Schematic for General Trend of  $K_\alpha \sim \alpha$  graphs

However other researchers rarely worked on small values of ISSS like  $\alpha=0.05$ , but it seems that the behavior of  $K_\alpha \sim \alpha$  graphs in this zone highly depends on the definition of failure criteria and tested material. Although the change in controlling failure criteria will happen anyway but it may not lead to the described increase in  $K_\alpha$  value.

Second zone,  $0.05 < \alpha < 0.10$  (B to C):

According to figure 10, value of  $(R_{ex})_{L10}$  continue falling and the effect of Shear Strain Amplitude Expansion is not influential in this zone. On the other hand, two other parameters,  $(R_{ac})_{L10}$  and  $(G)_{L10}$  both increase in this zone (figures 9 and 11). The increase in  $(G)_{L10}$  due to  $\alpha$ , means that higher values of ISSS would enhance the cyclic shear strength of samples which would consequently enhance the Liquefaction Resistance of sample by reducing cyclic shear strain amplitude.

As mentioned before, third failure criteria (reaching 5% accumulative cyclic shear strain) is controlling in this zone. So the increase in strain accumulation rate,  $(R_{ac})_{L10}$ , for higher values of ISSS, would speedup the approach to the third

failure criteria and consequently reduce the liquefaction resistance of sample.

Therefore, two contradictive elements affect the variation of  $K_\alpha$  due to ISSS in presence of ISSS. Depending on which one of this elements is dominant, the behavior of  $K_\alpha \sim \alpha$  graph would be increasing or decreasing.

Being precise about figures 9 and 11, we will find that for Initial Normal Stresses of 150 kPa and 250 kPa the increase in  $(G)_{L10}$  from  $\alpha=0.05$  to  $\alpha=0.10$  is still very low where the increase in  $(R_{ac})_{L10}$  is noticeable in this zone. Therefore, the effect of increase in Strain Accumulation rate would be dominant and  $K_\alpha$  decreases.

But for Initial Normal Stresses of 50 kPa, the value of  $(G)_{L10}$  is raising with an almost constant rate in this zone (see figure 9a) and  $(R_{ac})_{L10}$  value would increase too (see figure 11a). These two contradictive elements will neutralize each other's effect which would lead to a relatively constant value of  $K_\alpha$  in this zone (see figure 8a). This constant trend would extend to a part of next zone too.

Third zone,  $0.10 < \alpha < 0.3$  (C to D):

The confliction between two contradictive elements continue in this zone too, as figures 9 and 11 show that the increasing rate of  $(G)_{L10}$  become more intense in this zone for samples with Initial Normal stresses of 150 kPa and 250 kPa, and  $(R_{ac})_{L10}$  values go on with their raising rate too.

The trend of  $K_\alpha \sim \alpha$  graph in this zone (see figure 8) evidences that the effect of higher value of cyclic shear strength,  $(G)_{L10}$ , is dominant for  $\alpha < 0.10$  which caused the increase in  $K_\alpha$ . However, as mentioned before, the relatively constant value of  $K_\alpha$  continues till  $\alpha=0.20$  for samples under an Initial Normal Stress of 50 kPa and the increasing zone begins afterwards.

Figure 8 also suggest higher values of  $K_\alpha$  for samples with smaller Relative Densities, under identical other conditions. This happens as a result of more sensitivity of looser samples with respect to stress conditions which lead in more intense change in behavior of samples due to varying stress conditions.

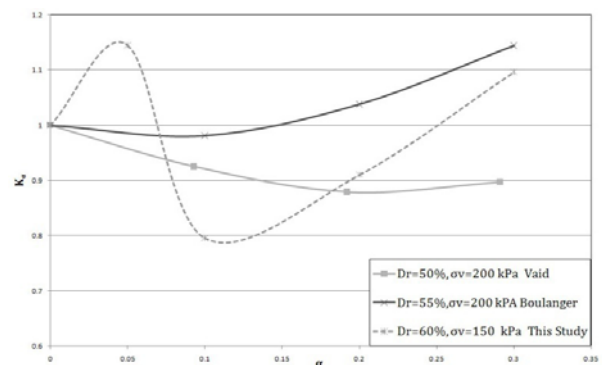


Fig. 13. Comparison between result of the previous researchers and this study

A comparison between results from this study and previous researches for similar initial conditions is illustrated in figure 13 which indicates a relative agreement between the results. However the differences in soil types and values for tested  $\alpha$ , caused some differences in details. It should be specially noticed that since other researchers did not consider low values of ISSS (like  $\alpha=0.05$  in this study), the peak value in this zone is not reported by them.

## CONCLUSIONS

In this research, the effect of static driving shear stress on the liquefaction resistance of Babolsar sand samples has been investigated. The results were compared to that reported by previous researchers and following conclusions can be made:

1. Applying a small value of  $\alpha$  (e.g.  $\alpha=0.05$  in this study), for all cases, would cause a change in controlling failure criterion which results in a raise in  $K_\alpha$ .
2. Since the rate of shear strain accumulation and cyclic shear strength both increases with  $\alpha$ , initial static shear stress would cause two contradictive effects on liquefaction resistance for  $\alpha>0$ .
3. The general trend of  $K_\alpha - \alpha$  graphs can be divided to three distinct zone; in the first zone ( $0.00 < \alpha < 0.05$ ), an increase in the  $K_\alpha$  would happen as a result of the change in controlling failure criteria. In the second zone ( $0.05 < \alpha < 0.10$ ), the dominance of the raise in shear strain accumulation rate would cause a fall in  $K_\alpha$ , and in the third zone ( $0.10 < \alpha < 0.3$ ), the  $K_\alpha$  would increase again since the effect of the raise in cyclic shear strength is dominant.
4. For cases under low confinement (i.e.  $\sigma_{v0}=50$  kPa in this study) the contradictive effect of increasing the cyclic shear strength and strain accumulation rate would neutralize each other for  $\alpha=0.05$  to  $\alpha=0.2$ , which results in relatively constant value for  $K_\alpha$  in this zone. However, after that for  $\alpha>0.2$  the effect of increase in cyclic shear strength would be dominant which cause the raise of  $K_\alpha$ .
5. For the same other initial conditions, higher values of  $K_\alpha$  would happen for looser samples.

## REFERENCES

Boulanger, R. W. [2003] "Relating to Relative State Parameter Index", Jour. of Geotech. and Geoenvr. Engrg, Vol. 129, No. 8, pp. 770-773.

Harder, L. F., Boulanger, R. [1997], "Application of  $K_\sigma$  and  $K_\alpha$  Correction Factors", Proc. NCEER Workshop on Evaluation of Liquefaction Resistance of Soils, Rep. NCEER-97-0022, National Cenr. for Erthq. Engrng Res., pp. 167-190.

Hosono, Y., and Yoshimine, M. [2004], "Liquefaction of sand in simple shear condition", Proc. Intl. Conf. on Cyclic Behaviour of Soils and Liquefaction Phenomena, CBS04, Bochum, Germany, CRC Press, Taylor & Francis Group, London. pp. 129-136.

Ishihara, K., Kawase, Y., Nakajima, M., [1980], "Liquefaction Characteristics of Sand Deposits at an Oil Tank Site during the 1978 Miyagikan-Oki Earthquake", Soils and Foundations, Vol. 20, No. 2, 97-111.

Ishihara, K., [1993], "Liquefaction and flow failure during earthquake", Geotechnique, Vol.43, No. 3, 351-415.

Lee, K.L., Seed, H.B. [1967], "Dynamic strength of anisotropically consolidated sand" Jour. of the Soil Mech. and Foundation Div., ASCE, No. 93, Vol. 5, pp. 169-190.

Lee, K.L., Seed, H.B. [1967], "Cyclic stress condition causing liquefaction of sand", Jour. of Soils Mech. and Foundation Engrg, ASCE, Vol. 93, SM1, pp. 47-70.  
Rahhal, M. E., Lefebvre, G., [2000] "Understanding the Effect of a Static Driving Shear Stress on the Liquefaction Resistance of Medium Dense Granular Soils", Soil Dyn. and Erthq Engrg, Vol. 20, pp. 397-404.

Seed, H.B, Lee, K.L., Idriss, I.M., Makadisi, F. [1973]. "Analysis of the slides in San Fernando dams during the earthquake of Feb. 9, 1971". Rep. No. EERC: 73-2 Erthq. Engrg. Res. Cen., Uni. of Calif., Berkeley.

Seed, H. Bolton, [1983], "Earthquake Resistant Design of Earth Dams," Proc. Symp. on Seismic Design of Embankments and Caverns, Phila., Penn., ASCE, N.Y.

Szerdy, F., [1985], "Flow slide failure associated with low level vibration", PhD thesis, the Uni. of Calif., Berekley, Calif.

Tatsuoka, F., Muramatsu, M. and Sasaki, T., [1982], "Cyclic Undrained Stress-Strain Behaviour of Dende Sands by Torsional Simple Shear Test", Soils and Foundations, Vol. 22, No.2, pp. 55-70.

Vaid, Y. P., and Finn, W. D. L. [1979], "Static Shear and Liquefaction Potential," Jour. of Geotech. Div., ASCE, Vol. 105, No. GT10, pp 1233-1246.

Vaid, Y. P., Chern, J. C., [1983], "Effect of Static Shear on Resistance to Liquefaction", Soils and Foundations, Vol. 23, No. 1, pp. 47-60.



Vaid, Y. P., and Chern, J. C., [1985], "Cyclic and Monotonic Undrained Response of Saturated Sands," Proc. Session on Adv. in the Art of Testing Soils under Cyclic Conds., ASCE, N.Y., pp. 120-147.

Watanabe, T., [1966], "Damage to Oil Refinery Plants and a Building on Compacted Ground by the Niigata Earthquake and their Restoration", Soil and Foundations, Vol. 6, No. 2, pp. 86-99.