

---

International Conference on Case Histories in Geotechnical Engineering (1993) - Third International Conference on Case Histories in Geotechnical Engineering

---

02 Jun 1993, 9:00 am - 12:00 pm

## Behavior of Laterally Loaded Drilled Shafts in Stiff Soil

A. J. Lutenegger

*University of Massachusetts, Amherst, Massachusetts*

G. A. Miller

*University of Massachusetts, Amherst, Massachusetts*

Follow this and additional works at: <https://scholarsmine.mst.edu/icchge>



Part of the [Geotechnical Engineering Commons](#)

---

### Recommended Citation

Lutenegger, A. J. and Miller, G. A., "Behavior of Laterally Loaded Drilled Shafts in Stiff Soil" (1993).

*International Conference on Case Histories in Geotechnical Engineering*. 3.

<https://scholarsmine.mst.edu/icchge/3icchge/3icchge-session01/3>



This work is licensed under a [Creative Commons Attribution-Noncommercial-No Derivative Works 4.0 License](#).

This Article - Conference proceedings is brought to you for free and open access by Scholars' Mine. It has been accepted for inclusion in International Conference on Case Histories in Geotechnical Engineering by an authorized administrator of Scholars' Mine. This work is protected by U. S. Copyright Law. Unauthorized use including reproduction for redistribution requires the permission of the copyright holder. For more information, please contact [scholarsmine@mst.edu](mailto:scholarsmine@mst.edu).



## Behavior of Laterally Loaded Drilled Shafts in Stiff Soil

A. J. Lutenecker

Associate Professor, Department of Civil Engineering, University of Massachusetts, Amherst, Massachusetts

G. A. Miller

Research Assistant, Department of Civil Engineering, University of Massachusetts, Amherst, Massachusetts

**SYNOPSIS** Results of lateral load tests on four drilled shafts installed in stiff cohesive soil are presented. Predictions of the load/displacement behavior were made using p-y curves generated from the results of Prebored Pressuremeter and Dilatometer Tests. A new method to develop p-y curves from the DMT is presented and discussed.

### INTRODUCTION

The design of drilled shafts to sustain static one-way lateral loads is a common problem encountered in geotechnical engineering. A number of papers present the results of studies conducted to evaluate the performance of rigid drilled shafts under lateral loads, (e.g., Adams and Radhakrishna, 1973; Reese and Welch, 1975; Ismael and Klym, 1978; Bhushan et al., 1979; Vallabhan and Alikhanlou, 1982; Coyle and Bierschwale, 1983). In the last ten years, considerable attention has been given to this problem and to the application of in situ tests to provide soil parameters for input. Design methods making use of both the prebored pressuremeter, PMT, and the flat dilatometer, DMT, have been presented as appropriate techniques for drilled shafts in clays and sands (e.g., Briaud et al., 1983, 1984a, 1984b; Gabr and Borden, 1988; Borden and Lawter, 1989; Huang et al., 1989). These tests may be performed rapidly and with relative ease and are therefore attractive for an economic approach to design.

In this paper, a comparison is made between the results of lateral load tests conducted on four drilled shafts and predictions of load/displacement curves made using the results of both prebored pressuremeter and dilatometer tests. An approach is presented using the dilatometer to develop the full p-y curve for use in design.

### TEST PROGRAM

#### Test Site

Tests were performed at a permanent research site located on the University of Massachusetts campus in Amherst, Massachusetts. The site is situated in the Connecticut River Valley of Western Massachusetts and consists of approximately 1 m of compacted, mixed cohesive and cohesionless fill over a relatively thick (25 m) deposit of lacustrine varved clay. The upper 8 to 10 m of varved clay is overconsolidated as a result of overburden erosion, chemical weathering and fluctuations in the water table. The water table at the site varies on the order of 1 to 2 m seasonally and generally occurs on average at a

depth of about 2 m below the ground surface. A summary of the site geotechnical characteristics in the upper 5 m is presented in Figure 1.

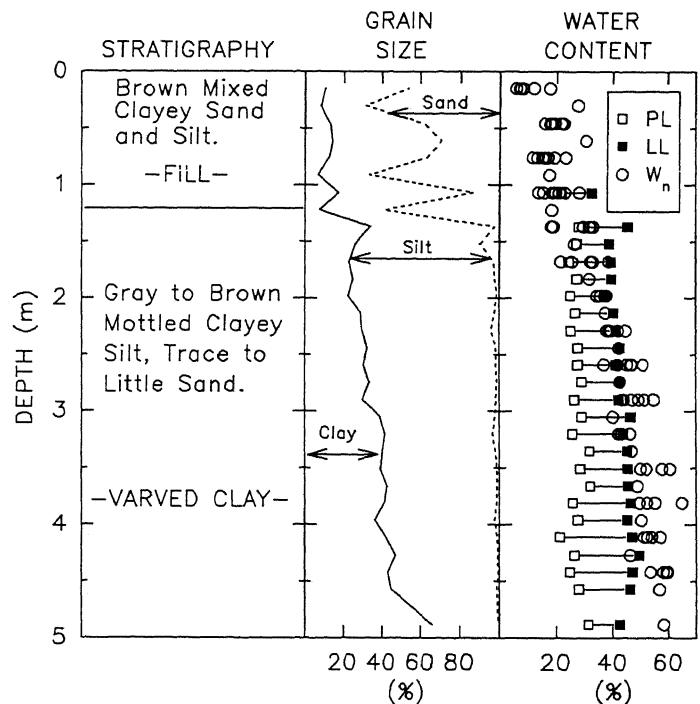


Figure 1. Soil Characteristics

#### In Situ Tests

In situ tests performed at the site for use in the predictions of drilled shaft behavior included prebored pressuremeter and flat dilatometer tests. To obtain vertical profiles of the soil response, tests were conducted every 0.3 m over the length of shaft embedment starting at 0.6 m and 0.3 m below the ground surface, for the PMT and DMT, respectively.

Pressuremeter tests were conducted using an NX

size (76 mm) monocell pressuremeter with a nominal length/diameter ratio of 6.4. Holes were drilled using a 76 mm diameter bucket-type hand auger which caused minimal disturbance to the side walls. Measurements of cavity deflection were made using strain gaged feeler arms which tracked the inside of the probe membrane during expansion. Probe inflation was accomplished using nitrogen. Testing procedures generally followed the outline presented in ASTM D 4719.

Flat dilatometer tests were conducted following the procedure described by Schmertmann (1988).

#### Installation of Drilled Shafts

All four shafts were installed using a single flight helical auger. Holes were dry upon completion of drilling and prior to placement of concrete. Steel reinforcing cages, consisting of four #6 rebars and #4 rebar square ties, were installed in the holes and concrete was placed by gravity free fall. Characteristics of the shafts and properties of the concrete are presented in Table 1.

Table 1. Shaft Characteristics

Shaft Number	Diameter, D (m)	Length, L (m)	L/D	f' <sub>c</sub> (MPa)
1	.51	1.52	3.0	27.6
2	.51	2.44	4.8	27.6
3	.61	1.52	2.5	27.6
4	.61	2.44	4.0	27.6

#### Load Testing

Load tests were performed by applying a ground-line lateral force between pairs of shafts using a manually controlled hydraulic jack. An in-line load cell with a resolution of 0.07 kN was used to measure the load. Ground-line displacements at each shaft were measured using a dial gage with a resolution of 0.025 mm. Loads were applied in increments of approximately 5 to 7 % of the predicted ultimate capacity and were maintained for twenty minutes. Load tests were conducted approximately one year after installation of the shafts.

#### METHODS OF ANALYSIS

##### Method of Solution

To obtain predictions of the ground line deflections of the shafts, a finite-difference approximation to the governing fourth order differential equation was made. The governing differential equation takes the form:

$$EI(d^4y/dx^4) + q(d^2y/dx^2) - p - w = 0 \quad (1)$$

where:  $q$  = axial load on the shaft,  
 $y$  = lateral deflection at point  $x$  along the shaft,  
 $p$  = soil reaction per unit length,  
 $EI$  = flexural rigidity, and

$w$  = distributed load along the shaft length.

The computer program used, LPILE1, is commercially available from Ensoft, Inc., and was developed by Lymon C. Reese. The program is equipped with subroutines to generate p-y curves from soil properties and also allows the user to input p-y curves. For predictions made in this paper, p-y curves were developed using test results from the PMT and DMT, as discussed subsequently.

#### Pressuremeter

Individual pressuremeter tests were used to develop p-y curves on 0.3 m intervals along the shafts, starting at a depth of 0.6 m. The method used to derive the p-y curve from the pressuremeter expansion curve is known as the Briaud-Smith-Meyer method (Briaud et al. 1983). This method is a compilation of observation and theory. It operates on the premise that the p-y curve is the sum of the front reaction, Q-y, curve and the side or friction reaction, F-y, curve. Pressure cell measurements on the front of a laterally loaded shaft indicated that the side friction can be an important component of the total resistance (Smith and Ray, 1986). It was also found that the pressure cell measurements closely matched the pressuremeter response in the same soil. Thus, the pressuremeter curve may be used directly to obtain the Q-y curve. The F-y curve is slightly more elusive and requires a good deal of engineering judgement. Baguelin et al. (1978) derived soil shear stress-strain curves from self-boring pressuremeter curves using the subtangent method of analysis. Smith and Ray (1986) found that applying this same method to the reload cycle of pre-bored pressuremeter tests provides results comparable to self-boring test.

In order to obtain appropriate p-y curves, reduction factors must be applied to the Q-y and F-y curves to account for the critical depth of the pressuremeter and/or shaft (Briaud et al., 1984). In addition, a reduction may need to be applied to account for the difference in the level of disturbance that occurs between a pressuremeter test hole and a drilled shaft excavation. Uplift tests on drilled shafts constructed using different augering techniques at the UMASS Test Site indicate that a 50 % reduction in the mobilized shear stress occurs as a result of mechanical flight augering as compared to hand augering. For this reason, in this study the F-y curves were adjusted accordingly.

#### Dilatometer

The dilatometer was used to provide p-y curves at 0.3 m intervals along each shaft. Methods exist which incorporate the DMT geometry and membrane lift off pressure,  $P_0$ , to obtain a subgrade reaction modulus,  $k$ , which is then substituted into a function to generate the p-y curve (Gabr and Borden, 1988; Schmertmann, 1988). In some instances a correction factor is applied to account for size effects. Common to all of these methods is the need to approximate the ultimate resistance of the soil,  $p_u$ . Thus, at a minimum these methods usually require an estimate of

shear strength parameters, horizontal earth pressure coefficient, vertical effective stress and various empirical factors used in the approximation of  $p_u$ .

A goal of this study was to initiate the development of a DMT method for p-y curve generation which incorporates primarily the DMT measurements. The goal was to minimize the reliance on soil parameters determined by other testing or empirical methods while maintaining a satisfactory level of performance. Specifically it was felt that  $P_0$  and the 1 mm expansion pressure,  $P_1$ , could be used to construct a p-y curve. This opinion was formed partly on the basis of observations made by Lutenecker and Blanchard (1990), who showed that the DMT  $P_1$  pressure corresponds very closely to the limit pressure,  $P_1$ , from full displacement pressuremeter tests. Since the value of  $P_1$  represents a limiting soil resistance, a good first approximation of  $p_u$  should incorporate  $P_1$ . In order to obtain an approximation of  $p_u$ ,  $P_1$  must first be multiplied by the shaft diameter to obtain the appropriate units of force/length. Additionally, Schmertmann (1988) suggested that for a reference width of 0.3 m, the subgrade reaction modulus is about one half of that determined with the DMT. For widths greater than 0.3 m it may be appropriate to apply a size correction factor such as that suggested by Terzaghi (1955). Although, the proposed method does not incorporate a direct estimate of subgrade reaction modulus, it was felt that the slope of the p-y curve is proportional to the subgrade reaction modulus (i.e., slope/shaft diameter = k). Other methods which utilize the DMT k value to develop the p-y relationship have implicitly applied this correction factor (when it is used) to all values of p on the curve. The resulting equation for  $p_u$  takes the form:

$$p_u = P_1 \times D \times CF \quad (2)$$

where: CF = size correction factor  
 $= 0.5[(D + 1)/(2D)]^2$ , and  
 D = shaft diameter.

Having established  $p_u$ , the next step is to determine the appropriate function to develop the p-y curve. The curve fitting method selected was that proposed by Gaziglu and O'Neill (1984) in their "integrated clay method" where the p-y curve function is:

$$p/p_u = 0.5(y/y_c)^{0.387} \quad (3)$$

where:  $y_c$  = reference deflection.

To establish an appropriate p-y curve, the reference deflection,  $y_c$ , must first be determined and takes the following form:

$$y_c = 0.8\epsilon_{50}D^{0.5}(EI/E_s)^{0.125} \quad (4)$$

where:  $\epsilon_{50}$  = 50 % axial strain from a triaxial compression test, and  
 $E_s$  = average soil modulus.

From this equation, it can be seen that  $y_c$  is relatively insensitive to  $E_s$  and for this reason the dilatometer modulus  $E_D$  can be used as a reasonable estimate of  $E_s$ .  $E_D$  is simply a function of the DMT expansion kinematics and the  $P_0$  and  $P_1$  pressures. An estimate of  $\epsilon_{50}$  is needed to determine an appropriate  $y_c$ . Unfortunately, this is where the proposed method relies on an externally determined soil parameter, however, this parameter has been well established for a variety of soil types and can be routinely determined in the lab. For the purpose of this study a value of 0.007 was used. It should be noted that the larger the value of  $\epsilon_{50}$ , the more conservative the predictions will be.

From Equation 3 it can be seen that the value of  $p_u$  occurs when  $(y/y_c) = 6$  as shown in Figure 2. Beyond this point the value of  $p/p_u$  is generally assumed to be constant. However, it was found in this study that the predictions at larger shaft displacements were slightly better when the parabolic equation was used for  $(y/y_c) > 6$ .

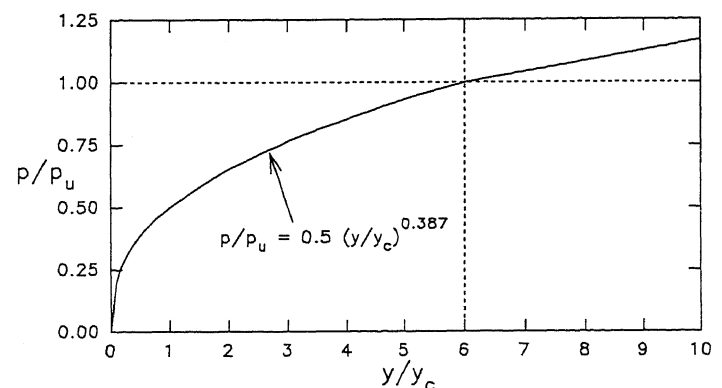


Figure 2. DMT p-y Curve

## RESULTS AND DISCUSSION

Comparison of the predicted and measured response of the four laterally loaded shafts is presented in Figure 3. The measured response for the shafts does not reflect the small size difference between the two diameters used. In fact the longer 0.51 m diameter shaft showed a stiffer response than the 0.61 m diameter shaft of the same length. This may be partially attributed to the natural variability of the surficial soil.

Predictions based on both the PMT and the DMT show essentially the same load/displacement curves for shafts of the same length and different diameters. The shape of the load/displacement curves predicted by the DMT more closely matches the shape of the actual curves as compared to the PMT, for shafts 1, 3 and 4. The poorer match displayed for Shaft 2 may simply be due to the fact that this shaft, contrary to that expected, exhibits stiffer behavior relative to the larger shaft of the same length.

Currently, the proposed DMT method is in the initial stage of development and further investigation of its appropriateness for other

shaft geometries and soil types is required. At the present time it appears to be a promising approach and additional effort is being given to this method.

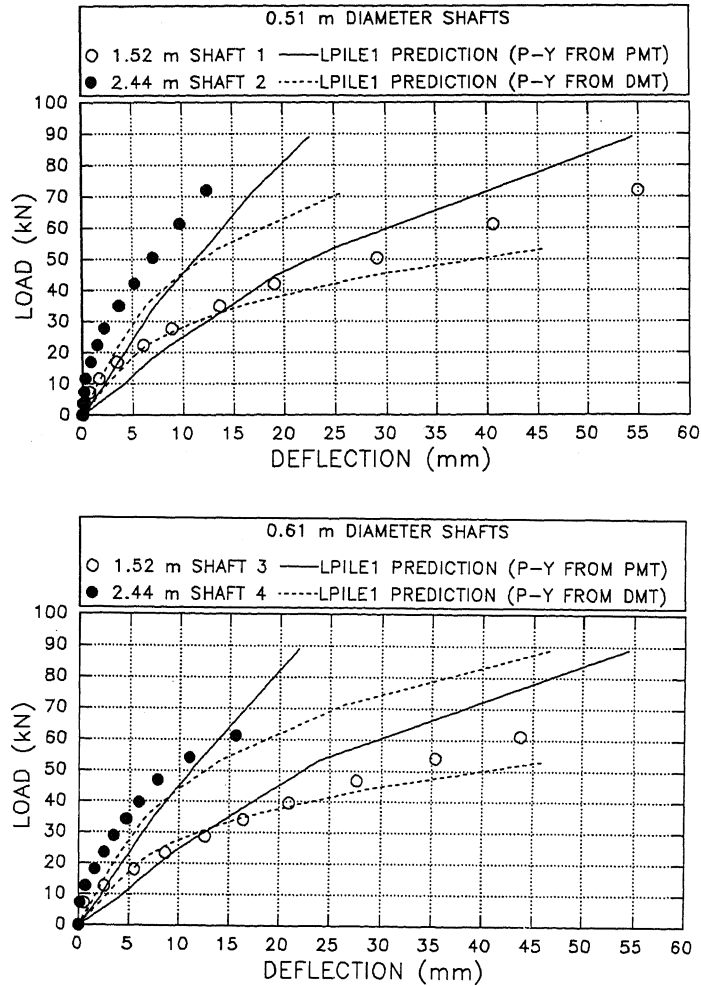


Figure 3. Shaft Load/Displacement Curves

LIST OF SYMBOLS

- CF = size correction factor
- D = shaft diameter
- E = shaft modulus of elasticity
- $E_p$  = DMT modulus
- $E_s$  = soil modulus of elasticity
- $\epsilon_{50}$  = 50 % axial strain from a triaxial compression test
- $f'_c$  = concrete compressive strength
- F = friction component of soil reaction, p
- I = moment of inertia
- k = soil subgrade reaction modulus
- L = shaft length
- LL = liquid limit
- p = soil reaction per unit length of shaft
- $P_0$  = DMT lift off pressure
- $P_1$  = DMT 1 mm expansion pressure
- $P_L$  = PMT limit pressure
- PL = plastic limit
- $p_u$  = ultimate lateral soil resistance

- Q = normal component of soil reaction, p
- q = axial load on the shaft
- w = distributed load along the shaft length
- $W_n$  = natural water content
- y = lateral displacement along the shaft
- $Y_c$  = reference deflection

REFERENCES

Adams, J.I. and Radhakrishna (1973), "The Lateral Capacity of Deep Augered Footings," Proc. 8th ICSMFE, Vol. 2.1, pp. 1-8.

Bhushan, K., Haley, S.C., and Fong, P.T. (1979), "Lateral Load Tests on Drilled Piers in Stiff Clays," Journal of the Geotechnical Engineering Division, ASCE, Vol. 105, No. GT8, pp. 969-985.

Borden, R.H. and Lawter, R.S. Jr. (1989), "Load-Deflection Response of Piles in Sand: Performance Prediction Using the DMT," Transportation Research Record No. 1235. pp. 79-88.

Briaud, J.-L., Smith, T.D., and Meyer, B.J. (1983), "Pressuremeter Gives Elementary Models for Laterally Loaded Piles," Proc. International Symposium on In Situ Testing of Soil and Rock, Paris, Vol. 2, pp. 217-222.

Briaud, J.-L., Smith, T.D., and Meyer, B.J. (1984a), "Laterally Loaded Piles and the Pressuremeter: Comparison of Existing Methods," Laterally Loaded Deep Foundations; Analysis and Performance, ASTM STP No. 835, pp. 97-111.

Briaud, J.-L., Pacal, A.J., and Shively, A.W. (1984b), "Power Line Foundation Design Using the Pressuremeter," Proceedings of the 1st International Conference on Case Histories in Geotechnical Engineering, Vol.1, pp. 279-283.

Coyle, H.M. and Bierschwale, M.W. (1983), "Design of Rigid Shafts in Clay for Lateral Load," Journal of Geotechnical Engineering, Vol. 109, No. 9, pp. 1147-1163.

Gabr, M.A. and Borden, R.H. (1988), "Analysis of Load Deflection Response of Laterally Loaded Piers Using DMT," Proceedings of the 1st International Symposium on Penetration Testing, Vol. 1, pp. 513-520.

Huang, A.B., Lutenegeger, A.J., Islam, M.Z., and Miller, G.A. (1989), "Analysis of Laterally Loaded Drilled Shafts Using In Situ Test Results," Transportation Research Record No. 1235, pp. 60-67.

Ismael, N.F. and Klym, T.W. (1978), "Behavior of Rigid Piers in Layered Cohesive Soils," Journal of the Geotechnical Engineering, Vol. 104, No. GT , pp. 1061-1074.

Lutenegeger, A.J. and Blanchard, J. (1990), "Comparison Between Full-Displacement Pressuremeter Tests and Dilatometer Tests in Clay," Proc. of the International Conf. in Pressuremeter Testing, pp. 309-320.

Reese, L.C. and Welch, R.C. (1975), "Lateral Loading of Deep Foundations in Stiff Clay," Journal of the Geotechnical Engineering Division, ASCE, Vol. 101, No. GT7, pp. 633-649.

Schmertmann, J.H. (1988), "Guidelines for Using the CPT, CPTU and Marchetti DMT for Geotechnical Design," Vol. 3, Research Report FHWA-PA-024-84-24, FHWA, U.S. Dept. of Transportation.

Smith, T.D. and Ray, B. (1986), "Shear Mobilization on Laterally Loaded Shafts," Geotechnical Aspects of Stiff and Hard Clays, ASCE, pp. 60-68.

Terzaghi, K., (1955), "Evaluation of Coefficients of Subgrade Reaction," Geotechnique, Vol. 5, No. 4, London, pp.297-326.

Vallabhan, C.V.G and Alikhanlou, F. (1982), "Short Rigid Piers in Clays," Journal of the Geotechnical Engineering Division, ASCE, Vol. 108, No. GT10, pp. 1255-1272.