

16 Apr 2004, 8:00am - 9:30am

## Jacking Pits in Boston's Central Artery Project

Arturo Ressi di Cervia

*Treviicos Corporation, Boston, Massachusetts*

Follow this and additional works at: <https://scholarsmine.mst.edu/icchge>



Part of the [Geotechnical Engineering Commons](#)

### Recommended Citation

di Cervia, Arturo Ressi, "Jacking Pits in Boston's Central Artery Project" (2004). *International Conference on Case Histories in Geotechnical Engineering*. 6.

<https://scholarsmine.mst.edu/icchge/5icchge/session05/6>



This work is licensed under a [Creative Commons Attribution-Noncommercial-No Derivative Works 4.0 License](#).

This Article - Conference proceedings is brought to you for free and open access by Scholars' Mine. It has been accepted for inclusion in International Conference on Case Histories in Geotechnical Engineering by an authorized administrator of Scholars' Mine. This work is protected by U. S. Copyright Law. Unauthorized use including reproduction for redistribution requires the permission of the copyright holder. For more information, please contact [scholarsmine@mst.edu](mailto:scholarsmine@mst.edu).



## JACKING PITS IN BOSTON'S CENTRAL ARTERY PROJECT

**Arturo Ressi di Cervia**  
Director, Treviicos Corporation  
Boston, MA

### ABSTRACT

The jacking of the largest concrete tunnels ever built in the United States required the construction of jacking pits of unusual dimensions and requirements.

The location of the pits posed the additional challenge of difficult ground conditions, since the bottom of the pits was in the Boston blue clay.

The pits had to have an unsupported span of over 40 feet to accommodate the dimensions of the tunnel, have a solid base to carry the weight of the sections being built and provide lateral resistance to the thrust of the jacks.

Treviicos met those challenges by constructing a four feet thick, post-tensioned slurry walls capable of spanning 55 feet without intermediate support and by creating a thirty feet thick jet grouted mass below the sub-grade which had the double function of contrasting the wall at its toe as well as providing a more competent foundation for the jacking operation.

### INTRODUCTION

The “Big Dig”, Boston’s replacement of its elevated Central Artery with an underground structure, is not only the largest urban transportation project ever built, but also one of the most difficult.

The project’s objective was to alleviate the traffic congestion in the downtown area by increasing the number of traffic lanes, reducing the access point and by diverting traffic coming from the South and directed to the airport through a new tunnel under the Boston inner harbor, under Fort Point Channel and under nine active railroad tracks.

While all of those crossing presented great challenges, the tunnel under the Amtrak lines was particularly difficult since it had to be built with only 20 feet of cover without taking out of service any of the tracks bringing commuters to South Station, the City’s busiest rail terminal.

Add to this the difficult geological conditions, the presence of utilities and obstructions and the size of the tunnels to be built and it is easy to believe that this particular contract ranks among the most challenging ones in a project which will be remembered for years to come as a true test of the ingenuity and professionalism of the American construction industry.

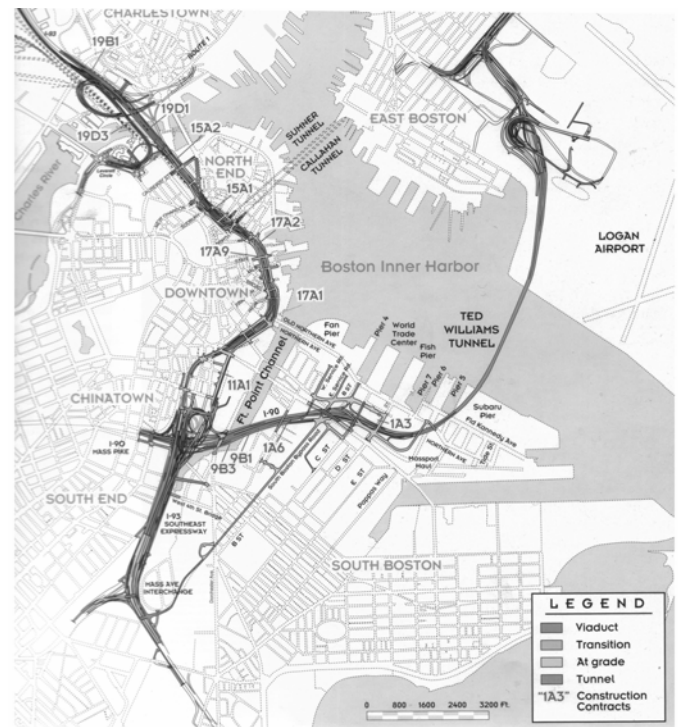


Fig. 1. Central Artery/Tunnel Project General Map

## METHODOLOGY

Three tunnels had to be built, all 78 feet wide by 38 feet high, the 150 feet long ramp section, the 260 feet long westbound tunnel and the 380 feet long eastbound one collectively known as the South Bay Interchange.

After careful study of the geology and of Amtrak's requirements, the chosen method was to jack the tunnels under the tracks, a feat never attempted in North America for boxes of those dimensions. Soil freezing was the method chosen to stabilize the ground through which the boxes had to be jacked and appropriate precautions were taken to compensate for the expansion of the frozen soil. In such a manner the tracks could be protected from collapses during excavation and from heave during the freezing procedure.


Hundreds of pipes were driven into the ground on a tight pattern between the tracks on the alignment of the proposed tunnels and brine at 30 degrees below zero was circulated through the pipes to create a block of frozen ground.



*Fig. 2. Soil Freezing*

While this operation was progressing, jacking pits needed to be built in which the tunnel section could be built and from which they could be launched.

While a road header started mining the frozen soil ahead of the sections, two set of jacks started pushing them forward three feet at a time. The frozen spoil was removed by a loader, put in akip pan and lifted to the surface by a crane.

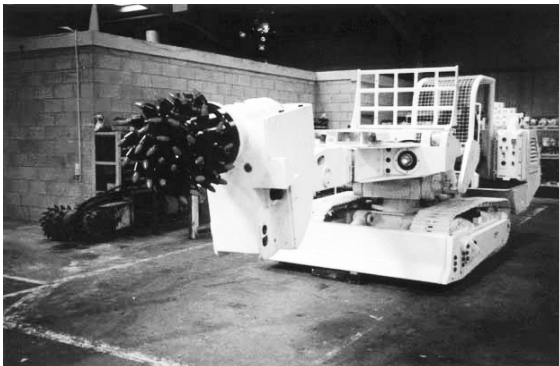

*Fig. 3. One type of Road Header*

## DESIGN OF THE JACKING PITS


The General contractor, a joint venture of Slattery, J. F. White, Interbeton and Perini, Was faced with the problem of constructing the jacking pits with a strict set of requirements:

- They had to be big enough to accommodate a full section of the tunnel and the jacking equipment.
- The bottom of the pits had to carry the weight of the concrete bottom slab, of the tunnel sections and of the jacking apparatus, had to resist uplift pressure during excavation as well as act as bottom brace for the side walls of the pits.
- The back walls had to resist the thrust of the 50 hydraulic jacks pushing forward the 17,000 tons tunnel sections.
- The front wall had to accommodate an opening of the size of the tunnel sections
- The side walls had to have a 40 feet unsupported span to accommodate the sliding tunnel sections.

Treviicos was the specialty subcontractor hired to do the job and, with the help of Weidlinger Associates, it developed a value-engineering proposal which satisfied all of the requirements of the General Contractor. It utilized four feet thick, post-tensioned slurry walls on three sides and three foot thick regular slurry wall on the side to be breached.

By using high stress tendons, draped to a profile determined by the bending moment diagram, triangular space frames as the upper support and the jet grouted mass as the bottom brace, the pits could be excavated to sub-grade with an unsupported span of 55 feet.

The slurry walls were 83 feet deep and the jet grouted bottom slab extended approximately 25 feet from sub-grade to the bottom of the wall.

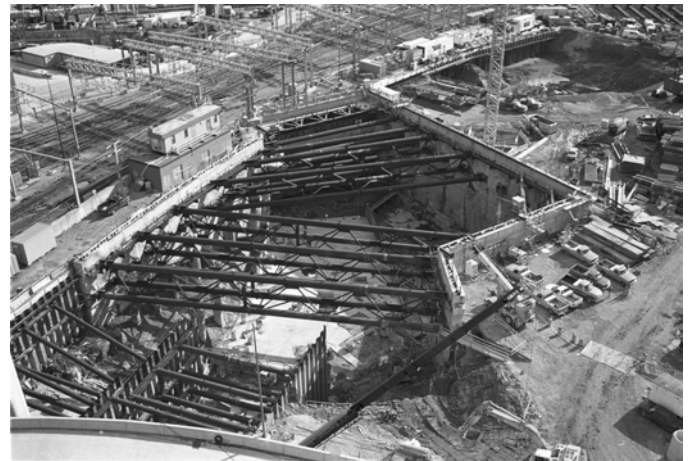

*Fig. 4. Site View*

CONSTRUCTION

A combination of mechanical clamshells, manufactured by Tecno Soil, and hydraulic ones, manufactured by Soilmecc, excavated the slurry walls, while the jet grouting work was done by Soilmecc equipment consisting of:

- CM-40J drill rig
- EC-30 leader and power pack mounted on a Link-Belt 128
- 7T-450H pressure pumps (three units)
- GM-14 mixing plants (two units)

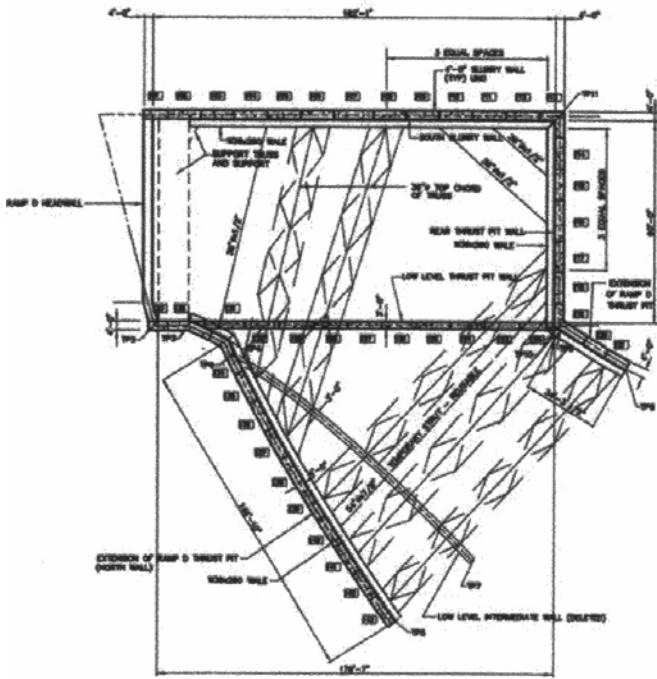


Fig. 5. Ramp "D" Jacking Pit

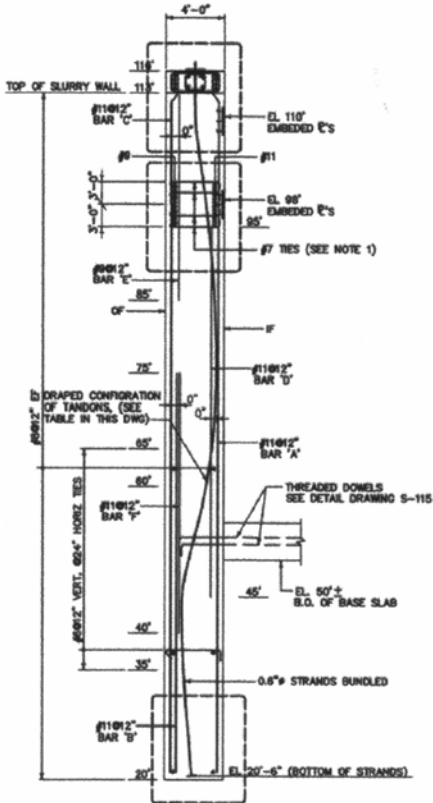


Fig. 6. Ramp "D" Jacking Pit



Fig. 7. Soilmec CM-40J Drill Rig performing Jet Grouting



Fig. 8. Soilmec SM-870 with a BH-12 Hydraulic Clamshell



*Fig. 9. BR Clamshell*



*Fig. 11. Completed West Bound Tunnel Jacking Pit*



*Fig. 10. Soilmec Soil Mixing Plant*

## CONCLUSION