

26 May 2010, 4:45 pm - 6:45 pm

## Experimental Soil - Foundation - Bridge Pier Interaction : Towards a Reversal of Capacity Design

Ioannis Anastasopoulos  
*National Technical University of Athens, Greece*

Takis Georgarakos  
*National Technical University of Athens, Greece*

Vasilis Drosos  
*National Technical University of Athens, Greece*

George Gazetas  
*National Technical University of Athens, Greece*

Follow this and additional works at: <https://scholarsmine.mst.edu/icrageesd>



Part of the [Geotechnical Engineering Commons](#)

---

### Recommended Citation

Anastasopoulos, Ioannis; Georgarakos, Takis; Drosos, Vasilis; and Gazetas, George, "Experimental Soil - Foundation - Bridge Pier Interaction : Towards a Reversal of Capacity Design" (2010). *International Conferences on Recent Advances in Geotechnical Earthquake Engineering and Soil Dynamics*. 22.  
<https://scholarsmine.mst.edu/icrageesd/05icrageesd/session05/22>



This work is licensed under a [Creative Commons Attribution-Noncommercial-No Derivative Works 4.0 License](#).

This Article - Conference proceedings is brought to you for free and open access by Scholars' Mine. It has been accepted for inclusion in International Conferences on Recent Advances in Geotechnical Earthquake Engineering and Soil Dynamics by an authorized administrator of Scholars' Mine. This work is protected by U. S. Copyright Law. Unauthorized use including reproduction for redistribution requires the permission of the copyright holder. For more information, please contact [scholarsmine@mst.edu](mailto:scholarsmine@mst.edu).



Fifth International Conference on

## Recent Advances in Geotechnical Earthquake Engineering and Soil Dynamics and Symposium in Honor of Professor I.M. Idriss

May 24-29, 2010 • San Diego, California

### EXPERIMENTAL SOIL–FOUNDATION–BRIDGE PIER INTERACTION : TOWARDS A REVERSAL OF CAPACITY DESIGN

**Ioannis Anastasopoulos**

Nat. Technical Univ. Athens  
15780, Athens, Greece

**Takis Georgarakos**

Nat. Technical Univ. Athens  
15780, Athens, Greece

**Vasilis Drosos**

Nat. Technical Univ. Athens  
15780, Athens, Greece

**George Gazetas**

Nat. Technical Univ. Athens  
15780, Athens, Greece

#### ABSTRACT

This paper presents a new seismic design philosophy, which under-designs the foundation to act as a “fuse” in case of strong seismic shaking. A simplified bridge pier is used to illustrate the advantages and disadvantages of this new philosophy compared to conventional capacity design. For this purpose, two alternatives are compared : one with an over-designed foundation, in accordance with conventional capacity design (so that the plastic “hinge” develops in the superstructure), and one with under-designed foundation. The performance of the two alternatives is investigated through shaking table testing of reduced scale models, using real accelerograms and artificial sinusoidal motions. It is shown that the performance of both alternatives is acceptable for moderate seismic shaking. For larger intensity ground motions, that clearly exceed the design limits, the performance of the new design concept is advantageous, not only avoiding collapse but hardly suffering any inelastic structural deformation. The price to pay is mainly the increase of seismic settlements, and in some cases of permanent foundation rotation.

#### INTRODUCTION

It has been several decades since the realization that the increase of the strength of a structure does not always enhance safety. Accepting that failure of some structural members cannot always be avoided during strong seismic shaking, earthquake engineering research focused on ensuring : (a) that structural members can sustain dynamic loads that exceed their strength without collapsing—ductility design, (b) that failure is “guided” to members that are less important for the overall integrity of the structure (i.e. beams instead of columns), and (c) that failure is in the form of non-brittle mechanisms (bending instead of shear failure) – capacity design [Park & Paulay, 1976].

With capacity design principles mainly referring to the superstructure, the effect of soil and foundation is usually underestimated. In the words of Priestley [2000] “*the incorporation of foundation compliance effects into force-based design is generally carried out inadequately, if at all*”. Even when foundation compliance is taken into account, little care is given to the nonlinearity of soil and foundation. In fact, current practice in seismic “foundation” design (e.g. EC8), attempts to avoid “at all costs” the mobilization of “strength” in the foundation. In structural terminology : no “plastic hinging” is allowed in the foundation–soil system. In simple

geotechnical terms, the designer must ensure that the foundation system will not even reach a number of “thresholds” that would conventionally imply failure. Thus, the following states are prohibited :

- (a) mobilization of the “bearing-capacity” failure mechanisms under cyclically-uplifting shallow foundations ;
  - (b) sliding at the soil–footing interface or excessive uplifting of a shallow foundation ;
  - (c) passive and shear failure along the sides and base of an embedded foundation ;
- “Overstrength” factors and factors of safety larger than 1 are introduced against each of the above “failure” modes, as in static design.

Although such a restriction may appear reasonable (since the inspection and rehabilitation of foundation damage after a strong earthquake is not easy), neglecting such phenomena prohibits the exploitation of strongly non-linear energy dissipating mechanisms in defence of the superstructure in case of occurrence of ground motions larger than design. A growing body of evidence suggests that soil–foundation plastic yielding under seismic excitation is not only

unavoidable, but may even be beneficial [Paolucci, 1997; Pecker, 1998; Martin & Lam, 2000; Kutter et al. 2003; Faccioli et al., 2001; Gazetas et al., 2003; Gajan et al., 2005; Apostolou & Gazetas, 2005; Kawashima et al., 2007; Gajan & Kutter, 2008; Chatzigogos et al., 2009].

The need for such a “reversal” of current seismic design stems from :

- The uncertainty of predicting the maximum credible earthquake and determining the characteristics of the corresponding seismic motion (PGA, PGV, frequency content, duration, details). For example, the notorious 1995  $M_w$  7.2 Kobe earthquake was generated by an unknown fault, generating PGAs of up to 0.85 g, compared to 0.3 g of the design code [e.g. Gazetas et al., 2005]. In fact, in each new earthquake larger PGAs are recorded. A recent example is the “long-awaited” 2004  $M_w$  6.0 Parkfield earthquake, where the maximum recorded PGA at close proximity to the seismogenic fault reached 1.8 g, accompanied by PGVs of the order of 100 cm/s [Shakal et al., 2006]. Such observations lead to the conclusion that the probability of occurrence of such large near-fault PGAs can be substantial. Thus, the challenge of defining upper bounds on earthquake ground motions [Bommer et al., 2004] can be seen from a different perspective. Therefore, it is considered logical to accept that the risk of occurrence of seismic ground motions larger than assumed in design will always be substantial. It is therefore important to develop new design methods that will allow structures to withstand earthquakes larger than assumed in design without collapsing or sustaining un-reparable damage.
- The necessity of developing economically efficient and environmentally-friendly earthquake protection solutions. The era of global economic crisis urgently calls for a drastic reappraisal of our way of thinking. Seismic safety and protection of human life is – and must remain – the first priority. However, a typical structure will have to withstand a strong earthquake only once or twice in its life. Hence, economy and respect to the environment should also play a role in the design process. So, instead of building larger and stronger (more expensive) foundations to make sure that strong seismic shaking will manage to get to the superstructure (i.e. conventional capacity design), and then reinforce the superstructure so that it may withstand the earthquake without collapsing (making it also more expensive and consuming more-and-more material resources), why not do exactly the opposite : intentionally under-design the foundations to act as “safety valves”, limiting the acceleration transmitted onto the superstructure. This way, we may achieve economy in the foundation and the superstructure, without undermining safety. In fact, as it will be shown in the sequel, due to the substantially larger ductility capacity of soil failure mechanisms compared to structural yielding, the new design philosophy may provide increased safety margins.

This paper investigates experimentally the potential effectiveness of a new seismic design philosophy, in which yielding of the soil–foundation system is “utilized” to protect the superstructure — i.e. exactly the opposite of conventional capacity design. A simple but realistic physical model of a bridge was constructed and tested in the shaking table of the Laboratory of Soil Mechanics (of NTUA). The two prototype alternatives and the difference between conventional design and the new philosophy is schematically illustrated in Fig. 1. The results presented herein can be seen as a first experimental proof of the potential advantages of the new concept. To become applicable in practice, the new design philosophy will have to be extensively verified analytically and experimentally (shaking table and centrifuge testing), something which is the scope of the EU-funded project “DARE” (Soil–Foundation–Structure Systems Beyond Conventional Seismic “Failure” Thresholds).

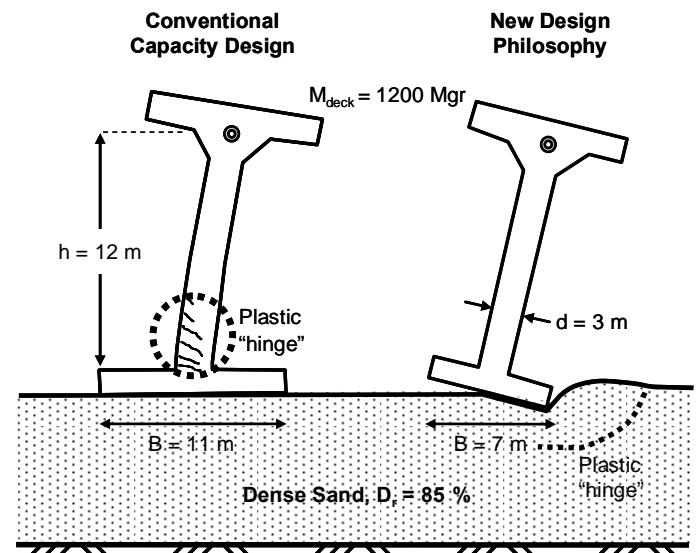


Fig. 1. The two prototype design alternatives, along with a schematic illustration of the difference between conventional capacity design and the new design philosophy.

## PROTOTYPE BRIDGE ALTERNATIVES

We consider a typical highway bridge excited in the transverse direction (Fig. 1). A deck of mass  $m = 1200$  Mgr is monolithically connected to a circular cross-section reinforced concrete pier of diameter  $d = 3$  m and height  $H = 12$  m. The bridge chosen for shaking table testing is the same with the one analyzed with finite elements in Anastasopoulos et al. [2009], and is intentionally quite similar to the Hanshin Expressway Fukae bridge, which collapsed spectacularly in the Kobe 1995 earthquake [Seible et al., 1995; Iwasaki et al., 1995; Park, 1996]. The bridge prototype is designed in accordance to EC8 [2000] and the Greek Seismic Code [EAK 2000] for design acceleration  $A = 0.24$  g, considering a (ductility-based) behavior factor  $q = 1.5$ . With an elastic fixed-base vibration period  $T = 0.48$  sec, the design spectral acceleration is  $SA = 0.4$  g.

The pier is founded through a square foundation of width  $B$  on an idealized 15 m deep dense sand layer, of relative density  $D_r = 85\%$ . Two different foundation widths are considered to represent the two alternative design approaches : a larger foundation,  $B = 11$  m, designed in compliance with conventional capacity design, applying overstrength factor  $\gamma_{Rd} = 1.4$  to ensure that the plastic “hinge” will develop in the superstructure (base of pier) ; and a smaller, under-designed,  $B = 7$  m foundation, in the spirit of the new design philosophy, applying an “understrength” factor  $1/\gamma_{Rd} = 1/1.4 \approx 0.7$  for seismic loading. Thus, the resulting safety factor for seismic loading is lower than 1.0 (FSE  $\approx 0.7$ ). In fact, as it will be shown below, the underdesigned foundation will not allow the design seismic action to develop. Hence, FSE does not really have a physical meaning in this case ; it is just an apparent temporary factor of safety.

## PHYSICAL MODEL PREPARATION

Physical models of the two bridge pier–foundation–soil alternatives were constructed and tested in the Laboratory of Soil Mechanics of the National Technical University of Athens (NTUA), utilizing a recently installed ANCO R51 shaking table. The table, 1.3 m x 1.3 m in dimensions, is capable of shaking specimens of up to 2 tons at accelerations of up to 1.6 g. Synthetic accelerograms, as well as real earthquake records can be simulated. The actuator is equipped with a servo-valve, controlled by an analog inner-loop control system and a digital outer-loop controller ; it is capable of producing a stroke of  $\pm 75$  mm.

Taking account of the capacity of the shaking table, a  $N = 50$  scale factor was selected for the experiments. The selection of model materials was conducted taking account of scaling laws [Gibson, 1997], so that the simulation is as realistic as possible for the given prototype. The bridge piers were constructed using commercially available steel and aluminum plates, as schematically illustrated in Fig. 2 (for the conventionally designed alternative).

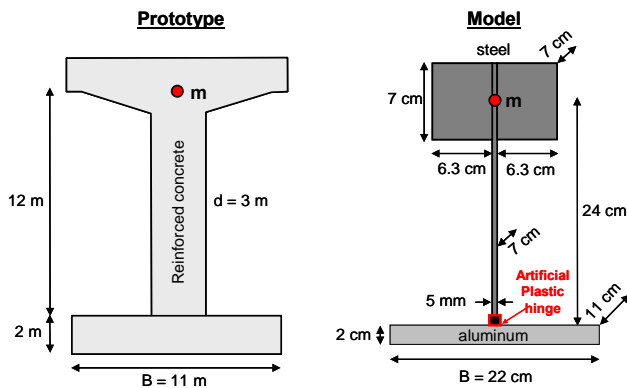


Fig. 2. Configuration and dimensions of the physical model, compared to the corresponding prototype (conventionally designed alternative ; half bridge modeled).

At small scale, it is practically impossible to model stiffness correctly (in consistency with the scaling laws) and achieve the desired (scaled) ultimate bending moment capacity of the pier at the same time. Hence, an artificial plastic hinge was custom designed and constructed, and placed at the base of the pier of the conventionally designed alternative. As schematically illustrated in Fig. 3a, the ultimate bending moment  $M_{ult}$  of the plastic hinge can be calibrated through adjustment of the torque applied at the nut-bolt assembly. To achieve repeatability, two Teflon washers were added between the bolts and the central steel plate. The calibration of the assembly was performed through static pushover testing, using the experimental configuration of Fig. 3b.

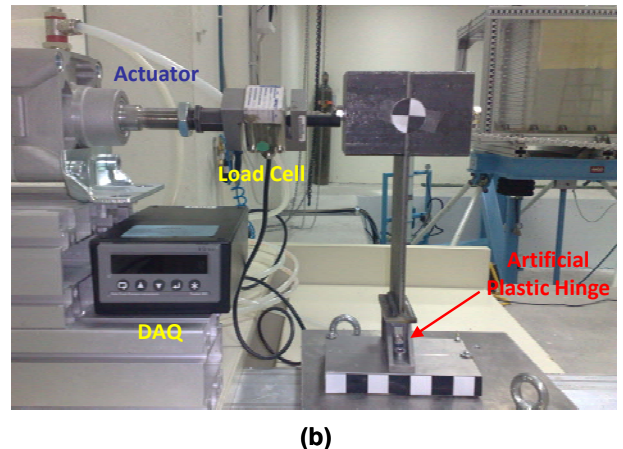
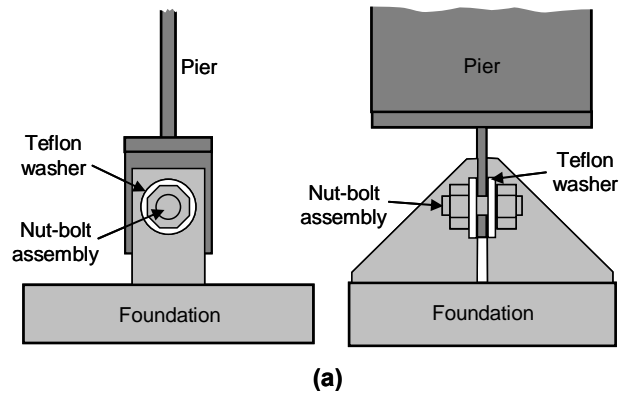


Fig. 3. (a) Sketch showing the artificial plastic hinge, and (b) static pushover for calibration of the ultimate bending moment  $M_{ult}$  of the plastic hinge.

The physical models of the two bridge-foundation design alternatives were placed inside a transparent laminar box. The latter, custom designed and constructed in the Laboratory (Fig. 4), provides the advantage of model deformation direct monitoring. The foundation soil consisted of dry “Longstone” (M34) sand, a very fine industrially produced uniform quartz sand with  $D_{50} = 0.15$  mm, uniformity coefficient  $D_{60}/D_{10} = 1.42$ ,  $e_{max} = 0.995$ ,  $e_{min} = 0.614$ , and  $G_s = 2.64$ .

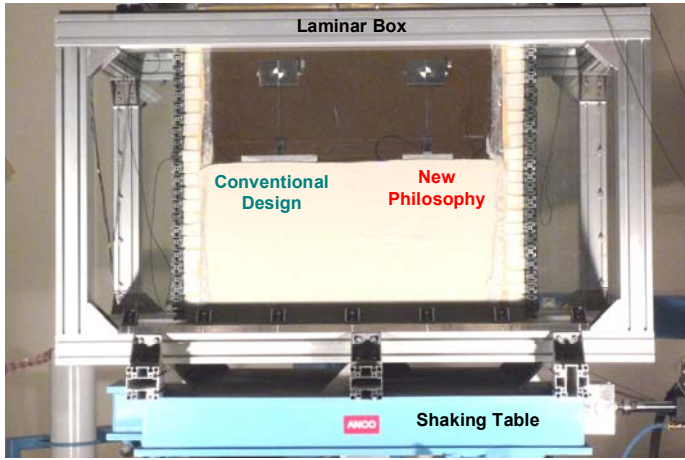


Fig. 4 . The two models placed inside the laminar box.

The shaking table models were prepared by raining the sand from a specific height with controllable mass flow rate (which controls the density of the sand), using a custom raining system, designed and constructed in the Laboratory (Fig. 5). For the maximum raining velocity and with the current configuration (width of sand container opening), for Longstone sand the system is capable of achieving relative densities  $D_r$ , ranging from about 10% to 85%. The tests were conducted at the maximum density (i.e.  $D_r = 85\%$ ).



Fig. 5. Sand raining system used for model preparation.

Tests were conducted with two different configurations : (a) both bridge physical models placed inside the laminar box (Fig. 4), and (ii) each model was placed and tested separately. The purpose of the first configuration was to demonstrate the differences between the two design alternatives under exactly the same conditions. The second configuration was used to measure horizontal and vertical displacements of the pier and its foundation. In that case, four accelerometers and four wire displacement transducers were installed, as illustrated in Fig. 6. Two accelerometers were placed inside the sand specimen during construction at predetermined positions, to measure soil response at the free-field and under the foundation ; an

additional accelerometer was installed at deck level to measure the response of the bridge. Two wire displacement transducers were installed in the horizontal direction to measure the drift of the structure, and two in the vertical direction to measure foundation rotation.

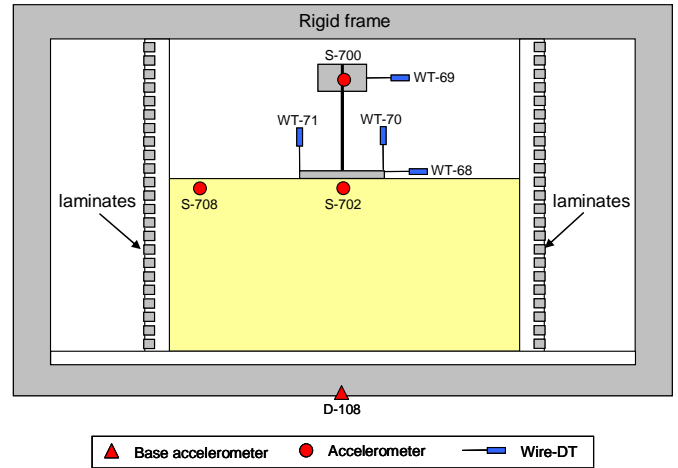


Fig. 6. Instrumentation of the shaking table tests (second configuration).

## SEISMIC EXCITATIONS

The shaking table tests were conducted using four real records and two artificial accelerograms as seismic excitations (Fig. 7). More specifically, we selected the Aegion 1995 and Kalamata 1986 records as representative of moderate intensity earthquakes, Lefkada 2003 as representative of moderate intensity earthquakes but with a large number of strong-motion cycles, and Rinaldi (Northridge 1994) as representative of large magnitude earthquakes. The two artificial 30-cycle sinusoidal motions were used to investigate the performance in extreme events.

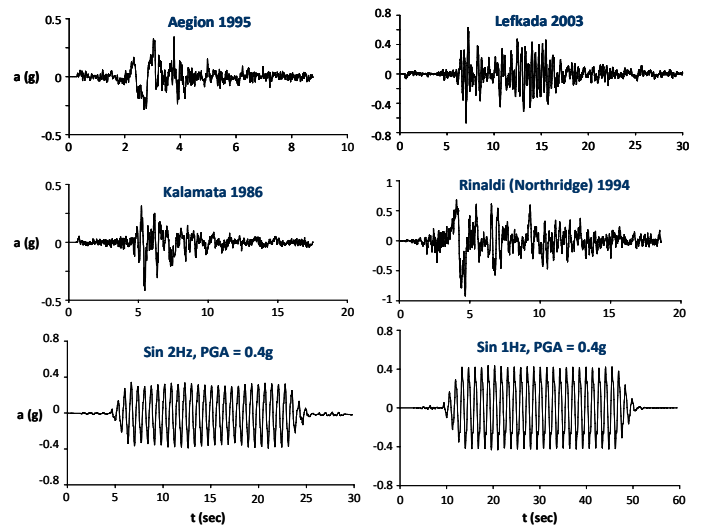


Fig. 7. Real and artificial seismic excitations.



## PERFORMANCE IN MODERATE SEISMIC SHAKING

We first compare the performance of the two alternatives subjected to a seismic excitation of moderate intensity. As such an example, we choose the record of the 2003 Ms 6.4 Lefkada (Greece) earthquake [Gazetas et al., 2004; 2005; Karakostas et al., 2004].

The comparison is portrayed in Fig. 8 in terms of deck acceleration  $a$ , deck drift  $\Delta$ , and foundation settlement  $w$  (results shown in prototype scale). A first conclusion is that the conventionally designed system experiences larger deck acceleration : approximately 0.4 g instead of roughly 0.3 g. In the first case, the acceleration is limited by the ultimate bending moment of the plastic hinge ; in the latter case by the ultimate capacity of the under-designed foundation.

As shown in the sketch, the drift has two components [see also Priestley et al., 1996] : (i) the “flexural drift”  $\Delta_C$ , i.e. the structural displacement due to flexural distortion of the pier column ; and (ii) the “rocking drift”  $\Delta_r = \theta H$ , i.e. the displacement due to rocking motion of the foundation. As shown in the figure, while for the conventional design  $\Delta$  is mainly due to pier distortion  $\Delta_C$ , the opposite can be observed for the under-designed foundation :  $\Delta$  is mainly due to foundation rotation  $\Delta_r$ . Despite the differences in the mechanism leading to the development of  $\Delta$  (pier distortion versus foundation rotation), the total drift is practically the same, and tolerable in both cases.

In terms of foundation settlement  $w$ , the conventionally designed system is subjected to limited settlement  $w \approx 1.5$  cm; the new concept experiences larger, but tolerable dynamic settlement :  $w \approx 6$  cm.

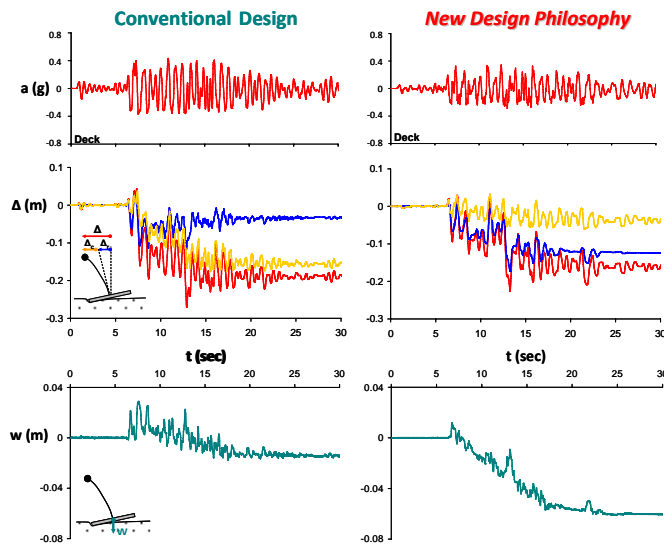


Fig. 8. Comparison of the response of the two systems subjected to moderate intensity seismic shaking (Lefkada 2003) : acceleration time histories at deck level, deck drift time histories (total, flexural, and rotational), and foundation settlement time histories.

## PERFORMANCE IN INTENSE SEISMIC SHAKING

We now use the Rinaldi record of the 1994 Northridge Ms 6.8 earthquake [Trifunac et al., 1998] as an example of large intensity seismic shaking. With PGA = 0.79 g and PGV = 164 cm/s, and a very strong forward rupture directivity pulse, this record can be seen to constitute a very severe seismic motion.

Fig. 9 summarizes the comparison in terms of deck acceleration  $a$ , deck drift  $\Delta$ , and foundation settlement  $w$ . As for the previous case, the conventionally designed system experiences larger deck acceleration compared to the new design concept.

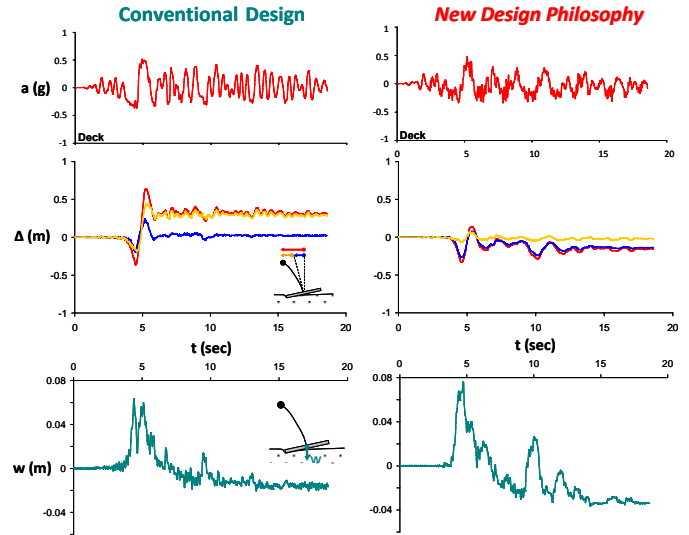


Fig. 9. Comparison of the response of the two systems subjected to large intensity seismic shaking (Rinaldi, Northridge 1994) : acceleration time histories at deck level, deck drift time histories (total, flexural, and rotational), and foundation settlement time histories.

In terms of deck drift, as for the Lefkada 2003 seismic excitation,  $\Delta$  is almost purely related to flexural pier drift  $\Delta_C$  for the conventional design. The opposite is observed for the new design concept :  $\Delta$  is mainly due to foundation rotation  $\Delta_r$ . In contrast to the previous case, the conventionally designed bridge is subjected to a maximum drift of about 65 cm (i.e. more than 5% of the pier height) and a residual drift of roughly 35 cm (i.e. about 3% of the pier height). In reality, such flexural distortion would probably imply collapse – or very serious damage – of the reinforced concrete pier. The reason why no collapse was observed in the experiment is none other than the ductility capacity of the artificial plastic hinge, which is substantially larger than the capacity of a reinforced concrete section.

Markedly different is the performance of the new design concept. The maximum drift is not exceeding 35 cm (i.e. roughly 3% of the pier height), and the residual drift is limited to less than 13 cm (i.e. about 1% of the pier height). Most

importantly, this drift is not associated with pier structural damage but with inelasticity of the soil supporting the foundation. Naturally, the increase of settlement is the price to pay :  $w \approx 3.5$  cm, instead of less than 2 cm of the conventionally designed system.

## PERFORMANCE IN EXTREME SEISMIC SHAKING

We now compare the response of the two systems subjected to the artificial 30-cycle sinusoidal motions, aiming to investigate their performance in extreme events.

### 30-cycle sinusoidal motion at 2 Hz

The comparative performance of the two alternatives is qualitatively similar, with their main differences being more pronounced due to the large number of strong motion cycles (Fig. 10). In particular, observe the accumulation of deck drift for both alternatives. In the case of the conventionally designed system,  $\Delta$  is mostly due to flexural pier drift  $\Delta_C$ , but some rotational drift  $\Delta_r$  is also accumulated. As for the previous cases, exactly the opposite is observed for the new design concept. The conventionally designed bridge is subjected to a residual drift of about 90 cm (i.e. about 7.5% of the pier height). Obviously, in reality such flexural distortion would imply collapse of the bridge, and (as for Rinaldi) the survival in the experiment is only due to the unrealistically large ductility capacity of the artificial plastic hinge.

The accumulation of drift in the new design concept is much smaller : the residual drift does not exceed 20 cm (i.e. less than 2% of the pier height). Exactly the opposite conclusion can be drawn for the settlement :  $w \approx 14$  cm for the new concept versus 8 cm of the conventionally designed system.

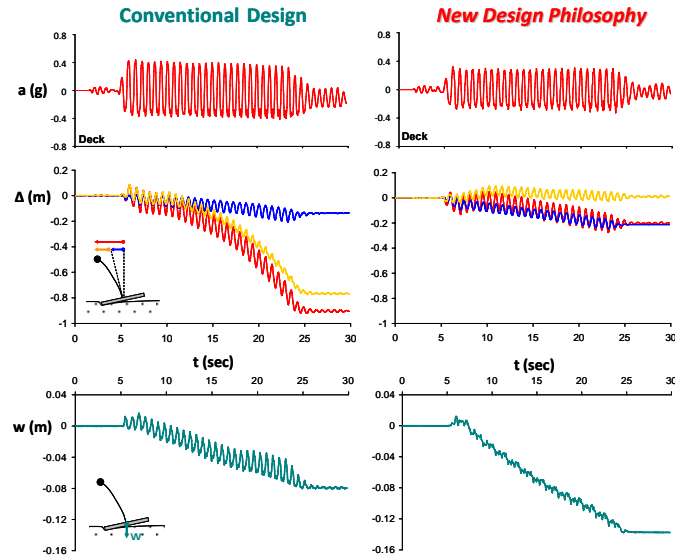


Fig. 10. Comparison of the response of the two systems subjected to extreme seismic shaking (30-cycle, 0.4 g sinusoidal motion at 2 Hz) : acceleration at deck level, deck drift, and foundation settlement time histories.

### 30-cycle sinusoidal motion at 1 Hz

We now compare the response of the two alternatives subjected to a small frequency ( $f = 1$  Hz) seismic excitation. It is noted that such an excitation cannot be claimed to be representative of any real earthquake. However, it is useful to demonstrate the substantially larger safety margins of the system designed according to the new philosophy.

As shown in Fig. 11, while the conventional system collapses at  $t = 23$  sec (i.e. after 10 strong-motion cycles), the bridge with the under-designed foundation (new concept) survives this tremendous seismic motion at the price of residual deck drift  $\Delta \approx 50$  cm and settlement  $w \approx 18$  cm.

Before collapse, the performance of the two alternatives is qualitatively similar to the previous cases : larger deck acceleration and  $\Delta$  predominantly associated with flexural pier drift  $\Delta_C$  for the conventional system ; larger settlement  $w$  and  $\Delta$  mostly due to rotational drift  $\Delta_C$  for the new concept.

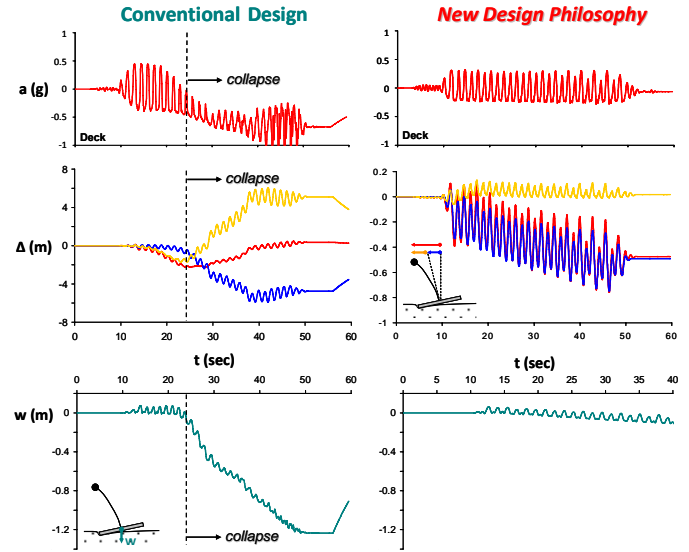


Fig. 11. Comparison of the response of the two systems subjected to extreme seismic shaking (30-cycle, 0.4 g sinusoidal motion at 1 Hz) : acceleration at deck level, deck drift, and foundation settlement time histories.

## CONCLUSIONS

This paper provides a first experimental investigation of the potential effectiveness of a new seismic design philosophy, in which soil failure is “utilized” to protect the superstructure. The seismic performance of the new concept (involving an under-designed foundation) has been compared to a conventionally designed bridge (with over-designed foundation).

A simple but realistic physical model of a bridge was constructed and tested in the shaking table of the Laboratory of Soil Mechanics (of NTUA). The results presented herein can be seen as a first experimental proof of the potential advantages of this new concept. An artificial plastic hinge was custom designed and constructed, to model the nonlinear response of the bridge pier at small scale.

For moderate intensity seismic motions, the performance of both alternatives is totally acceptable, and both would be utilizable right after such an earthquake. The conventionally designed bridge would probably sustain limited structural damage (minor flexural cracking), and would be easily repairable. On the other hand, the new concept would be subjected to slightly increased – but tolerable – deck drift and settlement, but would remain structurally unscathed.

The advantage of the new seismic design philosophy becomes clear for large intensity seismic motions, clearly exceeding the limits of the design. In such cases, while the conventionally designed system is driven to collapse, the new concept may survive the seismic motion with the damage being “contained” in the form of deck drift and settlement.

The key conclusions of this work are in line with the results of analytical work (referring to the same bridge) presented in Anastasopoulos et al. [2009].

## ACKNOWLEDGEMENT

This work forms part of an EU 7<sup>th</sup> Framework research project funded through the European Research Council’s Programme “Ideas”, Support for Frontier Research – Advanced Grant. Contract number ERC-2008-AdG 228254-DARE.

## REFERENCES

- Anastasopoulos I., Gazetas G., Loli M., Apostolou M., Gerolymos N. [2009], “Soil Failure can be used for Earthquake Protection of Structures”, *Bulletin of Earthquake Engineering*, Vol. 7, No. 4 (available online).
- Apostolou, M., Gazetas G. [2005], “Rocking of Foundations under Strong Shaking : Mobilisation of Bearing Capacity and Displacement Demands”, *Proc. 1<sup>st</sup> Greece–Japan Workshop, Seismic Design, Observation, Retrofit*, Athens 11-12 October, pp. 131-140.
- Bommer, J.J., Abrahamson, N.A., Strasser, F.O., Pecker, A., Bard, P-Y., Bungum, H., Cotton, F., Fach, D., Sabetta, F., Scherbaum, F., and Studer, J., [2004], “The challenge of defining the upper limits on earthquake ground motions”, *Seism. Res. Letters*, 70 (1), pp. 82–95.
- Chatzigogos C.T., Pecker A., Salencon J. [2009], “Macroelement modeling of shallow foundations”, *Soil Dynamics and Earthquake Engineering*, 29(6), pp. 765–781.
- EAK [2000], *Greek Seismic Code*, Organization of Seismic Planning and Protection, Athens (in Greek).
- EC8 (2000), Design Provisions for Earthquake Resistance of Structures, Part 5 : Foundations, retaining structures and geotechnical aspects, prEN, 1998-5 European Committee for Standardization, Brussels.
- Faccioli, E., Paolucci, R., and Vivero, G. [2001], “Investigation of seismic soil-footing interaction by large scale cyclic tests and analytical models”, *Proc., 4<sup>th</sup> Int. Conf. Recent Advances in Geotechnical Earthquake Engineering and Soil Dynamics*.
- Gajan, S., Phalen, J. D., Kutter, B. L., Hutchinson, T. C., and Martin, G. [2005], “Centrifuge modeling of load-deformation behavior of rocking shallow foundations”, *Soil Dynamics and Earthquake Engineering*, 25(7–10), pp. 773–783.
- Gajan, S., and Kutter, B. L. (2008), “Capacity, settlement, and energy dissipation of shallow footings subjected to rocking”, *J. Geotech. Geoenviron. Eng.*, ASCE, 134 (8), 1129–1141.
- Gazetas, G., Apostolou, M., and Anastasopoulos, I. [2003], “Seismic Uplifting of Foundations on Soft Soil, with Examples from Adapazari (Izmit 1999, Earthquake)”, *BGA Int. Conf. on Found. Innov., Observations, Design & Practice*, Univ. of Dundee, Scotland, September 25, pp. 37–50.
- Gazetas G., [2004], “Geotechnical aspects of the Ms 6.4 Lefkada Island, Greece 2003 Earthquake : Preliminary assessment”, *Proceedings of Fifth International Conference on Case Histories in Geotechnical Engineering*, New York, April 13-17 (in cd-rom).
- Gazetas G., Anastasopoulos I., and Dakoulas P. [2005], “Failure of Harbor Quaywalls in the Lefkada 2003 earthquake”, *Proceedings of Geotechnical Earthquake Engineering Satellite Conference – Performance Based Design in Earthquake Geotechnical Engineering : Concepts and Research*, Osaka, Japan, pp. 62-69.
- Gibson, A.D. [1997], *Physical Scale Modeling of Geotechnical Structures at One-G*, Report No. SML 97-01, California Institute of Technology, Pasadena, CA, pp. 413.
- Iwasaki T., chm, et al. [1995], *Report on Highway bridge damage caused by the Hyogoken Nanbu Earthquake of 1995*, Committee on Highway Bridge Damage, Japan.
- Karakostas, V.G., Papadimitriou E.E., and Papazachos C.B.



[2004], “Properties of the 2003 Lefkada, Ionian Islands, Greece, earthquake seismic sequence and seismicity triggering”, *Bulletin of the Seismological Society of America*, 94, pp. 1976–1981.

Kawashima K., Nagai T., Sakellarakis D. [2007], “Rocking Seismic Isolation of Bridges Supported by Spread Foundations”, *Proc. 2<sup>nd</sup> Japan-Greece Workshop on Seismic Design, Observation, and Retrofit of Foundations*, April 3-4, Tokyo, Japan, pp. 254–265.

Kutter BL, Martin G, Hutchinson TC, Harden C, Gajan S, Phalen JD. [2003], “Status report on study of modeling of nonlinear cyclic load-deformation behavior of shallow foundations”, *PEER Workshop*, University of California, Davis, March 2003.

Martin, G., R., and Lam, I. P. [2000]. “Earthquake Resistant Design of Foundations : Retrofit of Existing Foundations, *Proc. GeoEng 2000 Conference*, Melbourne.

Paolucci, R. [1997], “Simplified Evaluation of Earthquake Induced permanent Displacement of Shallow Foundations”, *Journal of Earthquake Engineering*, 1(3), 563- 579.

Park, R. [1996], “An Analysis of the failure of the 630 m elevated expressway in Great Hanshin Earthquake”, *Bulletin of the New Zealand National Society for Earthquake Engineering*, 29, 2.

Park R & Pauley T. [1976], *Reinforced Concrete Structures*. John Wiley : NY.

Pecker, A. [1998], Capacity Design Principles for Shallow Foundations in Seismic Areas, *Proc. 11<sup>th</sup> European Conference on Earthquake Engineering*, A.A. Balkema Publishing.

Priestley, M.J.N., Seible, F. and Calvi, G.M. [1996], *Seismic Design and Retrofit of Bridges*, John Wiley and Sons, New York.

Priestley, M.J.N. [2000], Performance based seismic design, *Proc. 12<sup>th</sup> World Conference on Earthquake Engineering (12WCEE)*, Auckland, New Zealand, Paper No. 2831.

Seible, F., Priestley, M.J.N. and MacRae, G. [1995], *The Kobe earthquake of January 17, 1995; initial impressions from a quick reconnaissance*, Structural Systems Research Report-95/03, University of California, San Diego, 1995.

Shakal, A., Haddadi, H., Graizer, V., Lin, K., and Huang, M. [2006], “Some Key Features of the Strong Motion Data from the M 6.0 Parkfield, California, Earthquake of 28 September 2004”, *Bulletin of the Seismological Society of America*, 96(4B), pp. S90–S118.

Trifunac, M.D., Todorovska, M.I., and Lee V.W. [1998], “The Rinaldi strong motion accelerogram of the Northridge, California, earthquake of 17 January, 1994”, *Earthquake Spectra*, 14(1), pp. 225-239.