
01 Aug 2024

Examination and Improvement of the Taguchi-Based Nanofluids Impact on CO₂ Absorption using Al₂O₃ Nanoparticles

Safa Waleed Shakir

Saif Saleh Hussein

Shaymaa Hasan Khazaal

Hyder Akram Al-Naseri

et. al. For a complete list of authors, see https://scholarsmine.mst.edu/che_bioeng_facwork/1917

Follow this and additional works at: https://scholarsmine.mst.edu/che_bioeng_facwork



Part of the [Biochemical and Biomolecular Engineering Commons](#)

Recommended Citation

S. W. Shakir et al., "Examination and Improvement of the Taguchi-Based Nanofluids Impact on CO₂ Absorption using Al₂O₃ Nanoparticles," *Journal of Advanced Research in Fluid Mechanics and Thermal Sciences*, vol. 120, no. 1, pp. 204 - 216, Semarak Ilmu Publishing, Aug 2024.


The definitive version is available at <https://doi.org/10.37934/arfmts.120.1.204216>

This Article - Journal is brought to you for free and open access by Scholars' Mine. It has been accepted for inclusion in Chemical and Biochemical Engineering Faculty Research & Creative Works by an authorized administrator of Scholars' Mine. This work is protected by U. S. Copyright Law. Unauthorized use including reproduction for redistribution requires the permission of the copyright holder. For more information, please contact scholarsmine@mst.edu.



Journal of Advanced Research in Fluid Mechanics and Thermal Sciences

Journal homepage:
https://semarakilmu.com.my/journals/index.php/fluid_mechanics_thermal_sciences/index
ISSN: 2289-7879



Examination and Improvement of the Taguchi-Based Nanofluids Impact on CO₂ Absorption using Al₂O₃ Nanoparticles

Safa Waleed Shakir^{1,*}, Saif Saleh Hussein², Shaymaa Hasan Khazaal³, Hyder Akram Al-Naseri¹, Ahmed Mohammed Ahmed⁴, Rana Najah Hachim¹, Muthanna Hikmat Al-Dahhan⁵

¹ Tikrit University, College of Engineering, Chemical Engineering Department, Tikrit, Iraq

² Technical College of Management-Baghdad, Middle Technical University, Baghdad, Iraq

³ Applied Science Department, University of Technology, Baghdad, Iraq

⁴ Ministry of Oil, Oil Products Distribution Company, Tikrit, Iraq

⁵ Chemical and Biochemical Engineering Department, Missouri University of Science and Technology, Rolla, MO 65409, United States

ARTICLE INFO

ABSTRACT

Article history:

Received 18 April 2024

Received in revised form 15 July 2024

Accepted 28 July 2024

Available online 15 August 2024

Keywords:

Taguchi; design of experiment; Al₂O₃; CO₂ absorption; nanofluid; nanoparticles; stirring speed

In this study, a batch absorption reactor was used to evaluate the nanofluid of a binary aqueous solution of monoethanolamine and 2-amino-2-methyl-1-propanol (MEA/AMP) with nanoparticles of aluminium oxide (Al₂O₃) as a solvent used to remove carbon dioxide (CO₂) from simulated flue gas. Furthermore, the application of the Taguchi experiment design method determined the optimal conditions for the absorption process. This research focuses on the CO₂ absorption process and the optimal conditions related to nanoparticle addition. The main effects of using nanofluid were investigated. The concentration of nanoparticles, nanoparticle size, and stirrer speeds were the evaluated factors. It found that the best conditions for using nanofluids in the absorption process were 0.00293 g/s, which is suitable for industrial applications using nanofluids.

1. Introduction

Recently, environmental issues have been exacerbated by the increased concentration of CO₂ in the atmosphere [1]. Though the emissions of CO₂ vary between pre-, post-, and oxyfuel combustion processes, only post-combustion has commercially available CO₂ absorption technology [2]. The importance of modeling and optimizing CO₂ removal from flue gas formed by fossil fuels utilized in power plants and industrial processes has increased significantly. Depending on the conditions and CO₂ emission source and concentration, many techniques can be used to separate CO₂, including adsorption, membrane, cryogenic, chemical, and physical absorption [3,4].

Many people consider the absorption of CO₂ to be a highly effective and popular method [5]. Industries have widely used the aqueous solution of an amine-based solvent to capture CO₂ [3,4-8]. Generally, various alkanolamines, like 2-amino-2-methyl-1-propanol (AMP), diethanolamine (DEA),

* Corresponding author.

E-mail address: eng.safawaleed@tu.edu.iq

<https://doi.org/10.37934/arfmts.120.1.204216>

triethanolamine (TEA), and monoethanolamide (MEA), capture CO₂ due to their high reactivity and availability.

However, because of its corrosivity at high solvent concentrations and energy requirements for regeneration, this lessens the importance of this method [2,5-10]. Finding a new solvent superior to MEA is the most problematic challenge. We should evaluate a variety of solvents to identify the optimal one which has a high absorption capacity and low regeneration energy requirements. Consequently, many researchers focused on finding and developing a new solvent. They discovered that the combination of two or more types of amines improved their characteristics [2,10-19]. Furthermore, they found that the combination of AMP and MEA had a higher absorption capacity than MEA alone. Primary amines and sterically hindered amines demonstrate strong CO₂ kinetic reactions and high CO₂ absorption capacities [9,10]. So, it is possible to moderate the disadvantages of commonly used solvents by combining different types of amines. Lastly, researchers found that adding nanoparticles to many solvents accelerates both gas absorption and desorption [5,8-22]. They found that a suspension of nanoparticles in a suitable fluid, and loading enhances the solvent ability [7,22-27]. Further research is necessary to fully understand the impact of adding nanoparticles on the rate of mass transport in gas-liquid systems [5,14]. This study aimed to evaluate the influence of adding nanoparticles to bi-blend alkanolamine. Furthermore, the modifiable parameters were investigated in order to improve CO₂ removal efficiency. The optimization was performed using Taguchi's traditional method.

2. Experimental

2.1 Chemicals and Equipment

Sigma-Aldrich, an Indian company, supplied the MEA (98%) and AMP (98%) nanoparticles, as well as 99.9% pure silicon oxide (Al₂O₃) at 60, 80, and 100 nm. The flue gas simulation required no further purification; cylinders containing 99.99 percent N₂ and 99.99 percent CO₂ were used. The apparatus included flow meters (Flowtech/U.S.A., N₂ (25–250) ml/min, CO₂ (25–250) ml/min), an ultrasonic cleaner, and a CO₂ analyzer (Atmocheck double CO₂/U.S.A., Range (0.00–100%)), as well as a maximum temperature of 60°C.

2.2 Preparation of Nanofluid

Figure 1 demonstrates the experimental nanofluid preparation process. MEA and AMP aqueous solutions of 1.5 and 1.5 molar quantities were mixed to create the base solvent. Then, nanoparticles of Al₂O₃ were sprayed into the solvent (1.5M MEA/1.5 AMP) using ultrasound to ensure distribution [1,27]. Figure 2 depicts the results of a visual examination of the nanofluid container at 24 hours to determine its stability. The experiments' nanofluids were created in accordance with Figure 1.

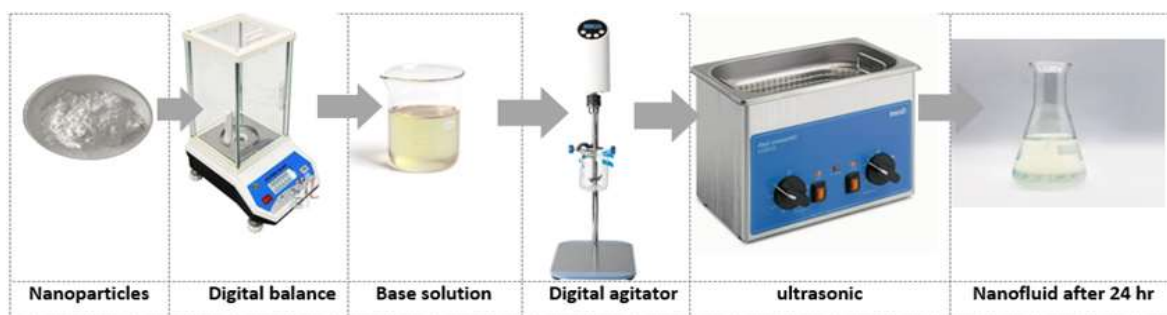


Fig. 1. The procedures for preparing nanofluids

2.3 Absorption Experiment

Figure 2 describes the experiments of CO₂ absorption were conducted at 1 atm pressure and a room temperature of 298 K in a 500-mL three-neck glass reactor. The gas streams of CO₂ and N₂ were combined to achieve the required CO₂ ratio (15 volume) using a flow meter. After that, the gas was introduced into the nanofluid via the absorption cell, and a CO₂ analyzer monitored the gas's escape from the absorption cell until the nanofluid reached CO₂-saturation. Eq. (1) shows how to use a CO₂ gas analyzer to measure the difference in CO₂ flow rates at the input and output of a gas-phase absorber [1].

$$R = F_{in} - F_{out}/m * 22.4 * 1000 \quad (1)$$

R represents the rate of CO₂ intake in moles per kilogram per minute. The Fin variable represents the inlet gas flow rate, which is measured in milliliters per minute. Fout: The outlet's gas flow rate in milliliters per minute.

The solvent absorption rate is represented by A, in moles per kilogram per minute. In milliliters per minute, " denotes the rate of gas flow out of the outlet. M: quality of solvent per kilogram. Figure 2 and Figure 3 display the CO₂ absorption experiment.

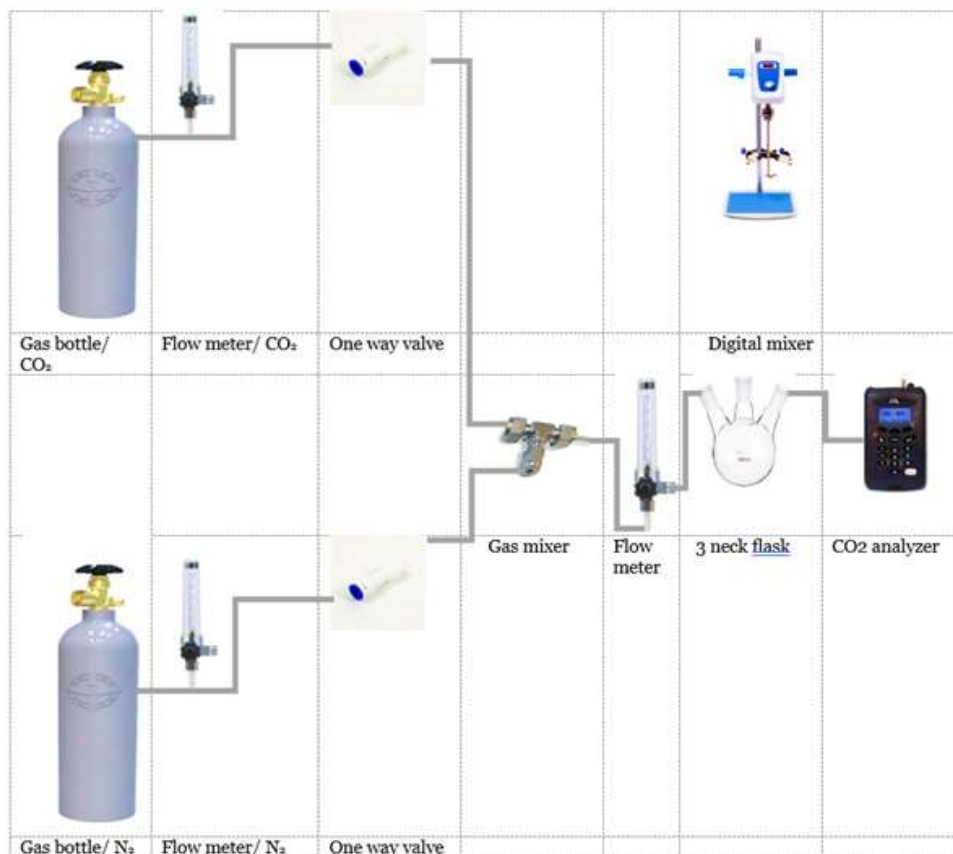


Fig. 2. The experiment process for CO₂ absorption

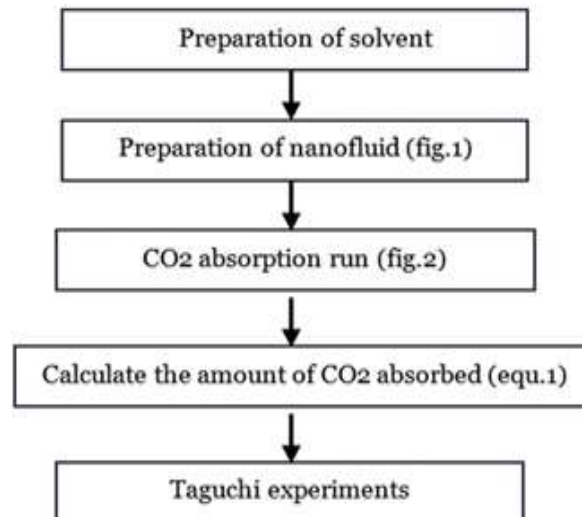


Fig. 3. The schematic of the CO₂ absorption experiment

3. An Experiment Design Process (DOE)

The application of design of experiment (DOE) based statistical methods is an effective approach for analyzing experimental data to observe the influence of various control factors on objective functions. In addition, this technique allows for process optimization and CO₂ absorption rate evaluation. The Taguchi optimization method is a well-established, unique, and long-lasting discipline that allows for optimization with few tests [22,26,27]. The factors that had a considerable influence on the CO₂ absorption rate using nanofluid were identified.

This study examined three factors related to nanoparticles, the stirrer speed (coded A), with levels (1, 4 rpm); the nanoparticle concentration of Al₂O₃ (coded B), with three levels (0.05, 0.1, and 0.15 vol. %); and the nanoparticle size (coded C), which has three levels (60, 80, and 100 nm). The L18 (3³ 2¹) array shown in Table 1 is the right orthogonal array for the Taguchi experiment design because it lets us study how the parameters disturb these mixed levels and the interaction between them.

Table 1
 L18 orthogonal array for Coded values

Exp. No.	Coded Values		
	A/ (stirrer speed)	C/ (nanoparticles size)	B/ (nanoparticles concentration)
1	1	0.01	60
2	1	0.01	80
3	1	0.01	100
4	1	0.05	60
5	1	0.05	80
6	1	0.05	100
7	1	0.1	60
8	1	0.1	80
9	1	0.1	100
10	4	0.01	60
11	4	0.01	80
12	4	0.01	100
13	4	0.05	60
14	4	0.05	80
15	4	0.05	100
16	4	0.1	60
17	4	0.1	80
18	4	0.1	100

To evaluate the experimental results, a signal-to-noise (S/N) ratio analysis is required. The Taguchi approach divides the performance characteristics (S/N) into three categories: "larger is the better (LB), nominal is the best (NB), and smaller is the better (SB)." The goal of this study was to use the greater-is-better standard. The S/N ratio with LB features can be calculated using Eq. (2), as follows [26,27]

$$S/N_{LB} = -10 \log \frac{[\sum_{i=1}^n 1/y_i^2]}{n} \quad (2)$$

where y_i represents the experiment's effectiveness and n is the number of times the exact same experimental conditions were repeated. The MINITAB 17 software was used to analyze the experimental data.

4. Results and Discussion

4.1 Signal-to-Noise Ratio Analysis and Optimization

MINITAB 17 program was used to find the relation of the CO₂ absorption rate and the nanofluid essential factors. Also, equation of the multiple linear regression was generated to study the influence of each factor statistically. Eq. (3) signifies the percentage of CO₂ absorption rate; the correlation coefficient R seq., which is equal to 94.28%, shows how well the model fits the data.

Table 2 displays the expected and experimental values for the CO₂ absorption rate. As well as the expected CO₂ absorption rates from Eq. (3), which can be seen in Table 2, there are also the S/N ratios for each experimental response from Eq. (2). A comparison of the predicted and experimental results based on Eq. (3) is shown in Figure 4. It is evident that the model accurately predicts the rate of CO₂ absorption, and Eq. (3) may be considered a helpful tool for process assessment.

$$CO_2 \text{ absorption rate} = 0.003022 + 0.000024 * X_1 + 0.001583 * X_2 - 0.000008 * X_3 \quad (3)$$

Table 2

Experimental and predicted values of CO₂ absorption rate and S/N ratios outcomes of all experiments

Exp. No.	Stirrer speed (rpm)	nano conc. (vol%)	nano size (nm)	Experimental CO ₂ absorption rate (g/s)	predicted CO ₂ absorption rate (g/s)	S/N Ratio
1	1	0.05	60	0.00267	0.00264515	-51.65
2	1	0.05	80	0.00255	0.00248515	-51.41
3	1	0.05	100	0.00235	0.00232515	-51.14
4	1	0.1	60	0.0027	0.0027243	-50.79
5	1	0.1	80	0.00265	0.0025643	-50.50
6	1	0.1	100	0.0024	0.0024043	-50.18
7	1	0.15	60	0.00285	0.00280345	-49.76
8	1	0.15	80	0.00261	0.00264345	-49.44
9	1	0.15	100	0.00254	0.00248345	-49.01
10	4	0.05	60	0.00277	0.00271715	-48.52
11	4	0.05	80	0.00254	0.00255715	-48.05
12	4	0.05	100	0.00247	0.00239715	-47.42
13	4	0.1	60	0.00278	0.0027963	-46.64
14	4	0.1	80	0.00262	0.0026363	-45.90
15	4	0.1	100	0.0025	0.0024763	-44.89
16	4	0.15	60	0.00293	0.00287545	-43.41
17	4	0.15	80	0.00277	0.00271545	-41.89
18	4	0.15	100	0.0026	0.00255545	-39.15

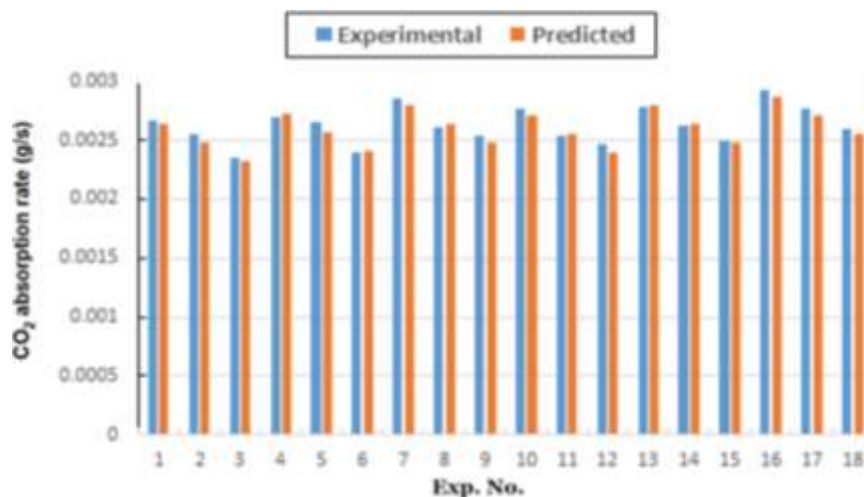


Fig. 4. Displays the actual and predicted rate of CO₂ absorption

The mean of each factor's reaction at each level is shown in Table 3, as seen in Figure 5. The mean's results indicate that the following is the order in which the most crucial factors are listed: Concentration (vol%) > nanosize (nm) > speed (rpm).

Table 3

Computed average response for information gathered from CO₂ absorption

Level	A	B	C
1	0.002591	0.002558	0.002783
2	0.002664	0.002608	0.002623
3	-	0.002717	0.002477
Delta	0.000073	0.000158	0.000307
Rank	3	2	1

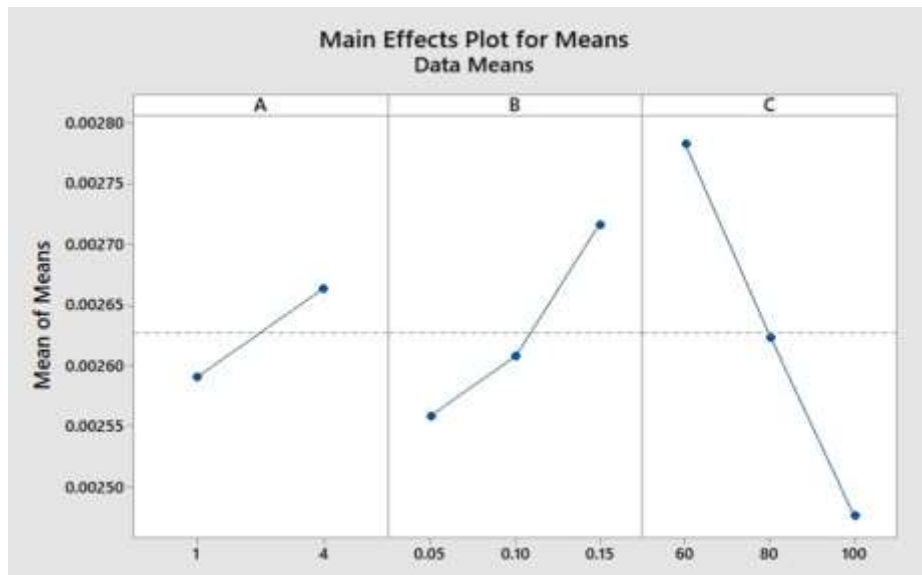


Fig. 5. Main effect plot for CO₂ absorption mean values

Table 4 displays the response table for the four investigated components' ranks and estimated signal noise ratios (LB), which are graphically shown in Figure 6; using delta statistics, the proportions of effects are compared to determine the rankings. The delta statistics are computed by deducting the biggest average for a given parameter from the lowest average [26]. The rate at which CO₂ is absorbed increases with the S/N ratio. The order in which each component was ranked makes it abundantly evident that the concentration of nanoparticles is the most important factor.

Table 4

S/N response table (bigger is better)

Level	Speed (rpm)	Concentration (vol.%)	nano size (nm)
1	-51.74	-51.85	-51.11
2	-51.50	-51.68	-51.63
3	-	-51.33	-52.13
Delta	0.24	0.52	1.01
Rank	3	2	1

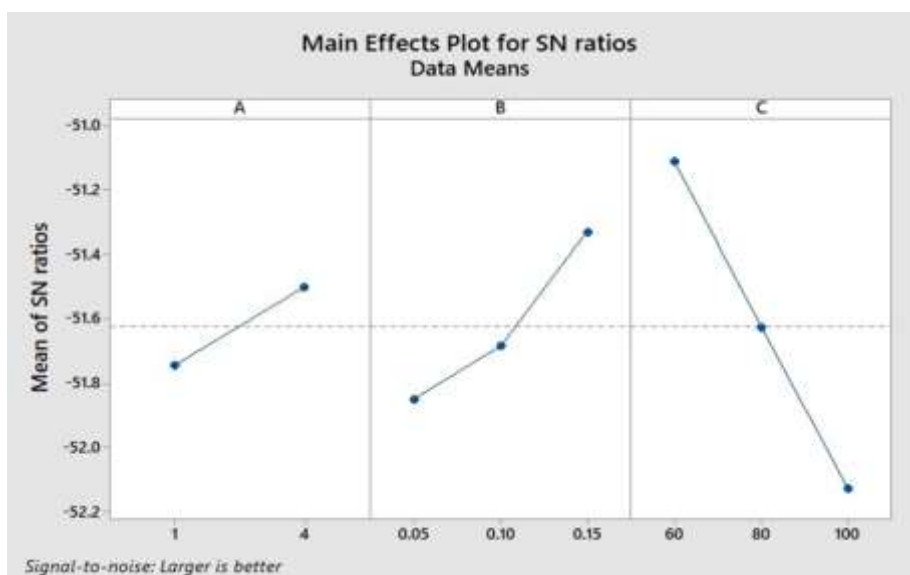


Fig. 6. Major effect S/N plots for CO absorption (higher is better)

4.2 Analysis of Variance (ANOVA)

The statistical method (ANOVA) was used to examine the effect weight of each factor. In the study, each principal component displays the total variance obtained, which is composed of an unobserved difference. "The more you write a section for each parameter studied, the more specifically it will spread. This can also help in better understanding the final results and the probability of performing the test under controlled pressure. ANOVA was calculated using degrees of freedom (DF), sums of circles (SS), the ratio of the effect of each parameter, the adjusted modifier combinations (Adj SS), the adjusted mean squares (Adj MS), the F-value, and the P-value. These are the values saved for each controllable creature [25,26].

Table 5 shows the ANOVA results of all experiments. Based on the following, regarding the most important factors affecting absorption efficiency: According to their contribution ratio, force (volume%) > speed (cycle in detail) > differential (nm). The P value, which is defined as the correlation between the sum of the squares of the parameters and the sum of the squares, can also be used to account for the significance of each component in the compensation. If the p-value is less than 0.05 (at the 95% confidence level), it is considered a significant parameter [25]. P values (based on a 95% confirmed score) indicate that this factor was significant. However, speed (rpm) and variety (nm) have not been much in the scope of scientific research.

Since $F > 1$ for controlled parameters, there is less error from these connection variances, which means that this factor may have a significant influence on the responses [26].

Table 5
 Examining the absorption of CO₂ by Analysis of Variance (ANOVA)

Source	DF	Seq. SS	Contribution %	Adj. SS	Adj. MS	F-Value	P-Value
mixing speed (rpm)	1	0.000000	5.98	0.000000	0.000000	14.82	0.002
nano concentration (vol.%)	2	0.000000	19.42	0.000000	0.000000	24.08	0.000
nano size (nm)	2	0.000000	69.76	0.000000	0.000000	86.47	0.000
Error	12	0.000000	4.84	0.000000	0.000000	-	-
Total	17	0.000000	100	0.000000	0.000000	-	-

4.3 Impact of Operational Factors

4.3.1 Effect of Al₂O₃ nanoparticle concentration (vol. %)

Figure 7 and Figure 8 show the Al₂O₃ nanoparticles concentration (vol. %) influence on the carbon dioxide absorption rate using Eq. (3) at different speed rates. It is clear that increasing the concentration of nanoparticles increases the expected absorption rate as a result of increasing the transfer area of the material, which is consistent with previous studies [27]. When the F value was 0.05 or less than 1 and the contribution ratio was 0.05%, the S/N and ANOVA results showed that the chosen range of nanoparticle concentration had a significant effect on the CO₂ adsorption rate, indicating that it was not an important factor in the process performance.

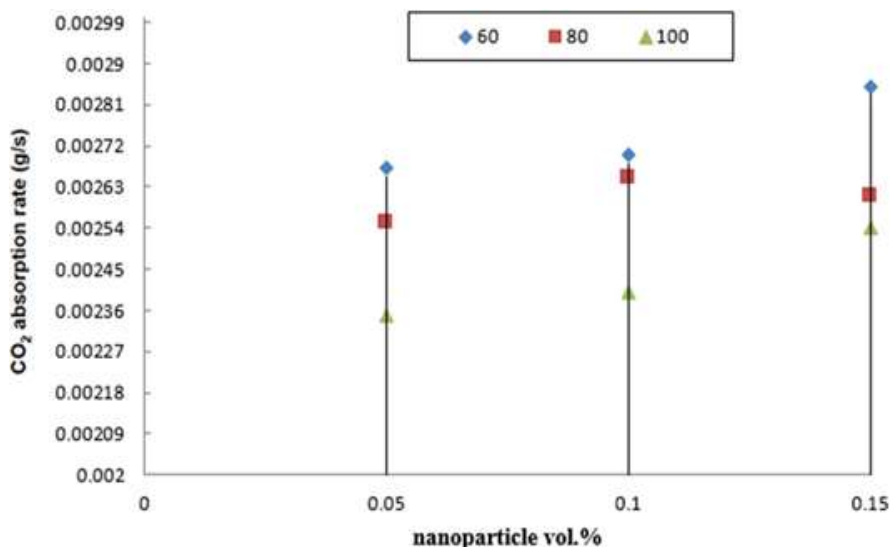


Fig. 7. The impact of Al₂O₃ nanoparticle concentration on the CO₂ absorption rate at (1 rpm)

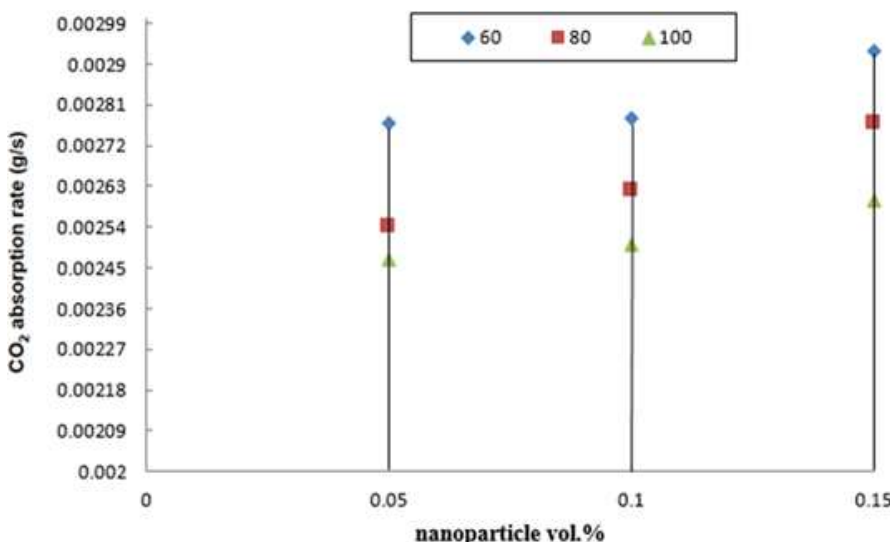


Fig. 8. The impact of Al₂O₃ nanoparticles concentration on the CO₂ absorption rate at (4 rpm)

4.3.2 Effect of stirred speed

Nanofluid stirring speed is one of the most influential characteristics that affecting the absorption of CO₂. Figure 9, Figure 10, and Figure 11 show the effect of stirring speed on the absorption rate. This parameter's value directly affects the amount of carbon dioxide absorption. In addition to Brownian motion, accelerating the stirring process increases the contact area of the ripped gas bubbles with the liquid and nanoparticles, thereby accelerating the rate of CO₂ absorption [1]. Eq. (3) generated Figure 9, Figure 10, and Figure 11 to illustrate the effect of increased stirring speed on CO₂ adsorption using nanofluid. (3). It was found that increasing stirring increases the absorption rate from 0.0026 to 0.00293 g/s. The S/N data indicate that an increase in current density leads to higher an S/N values.

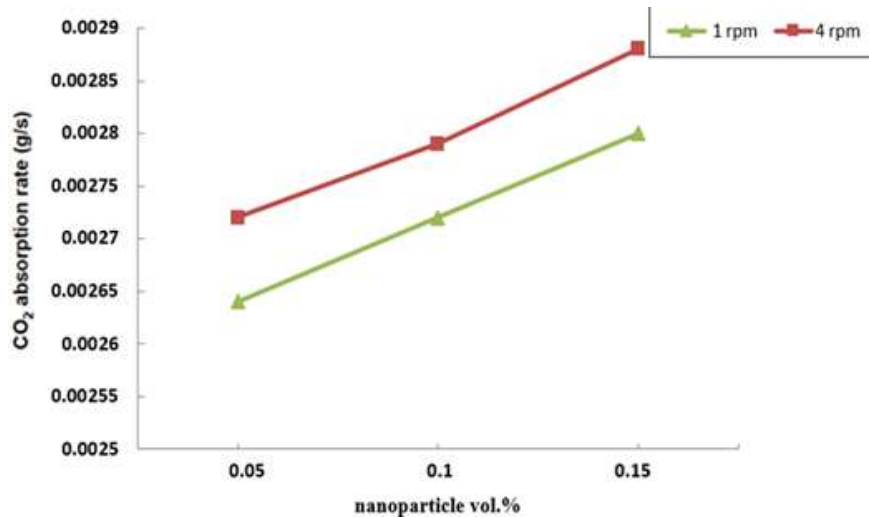


Fig. 9. Shows the impact of stirrer speed on the rate of CO₂ absorption for Al₂O₃ nanoparticles with a size of 60 nm

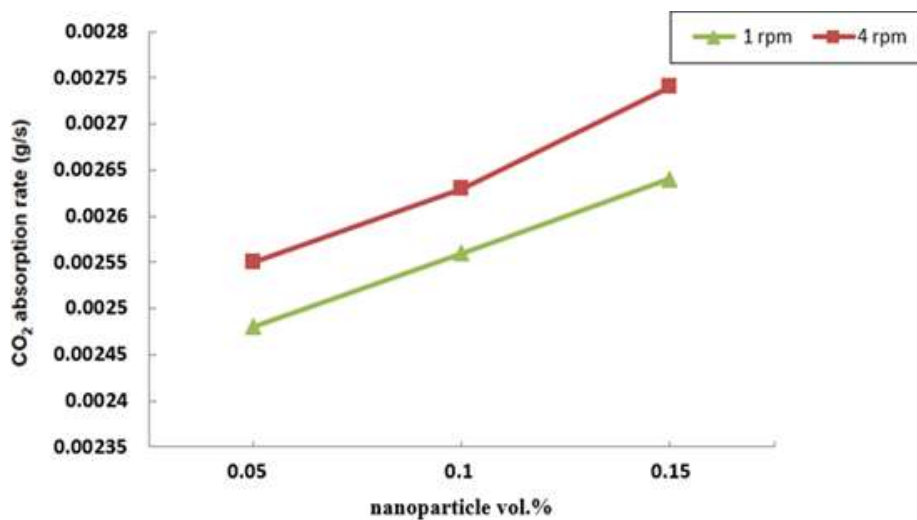


Fig. 10. Shows the impact of stirrer speed on the rate of CO₂ absorption for Al₂O₃ nanoparticles measuring 80 nm

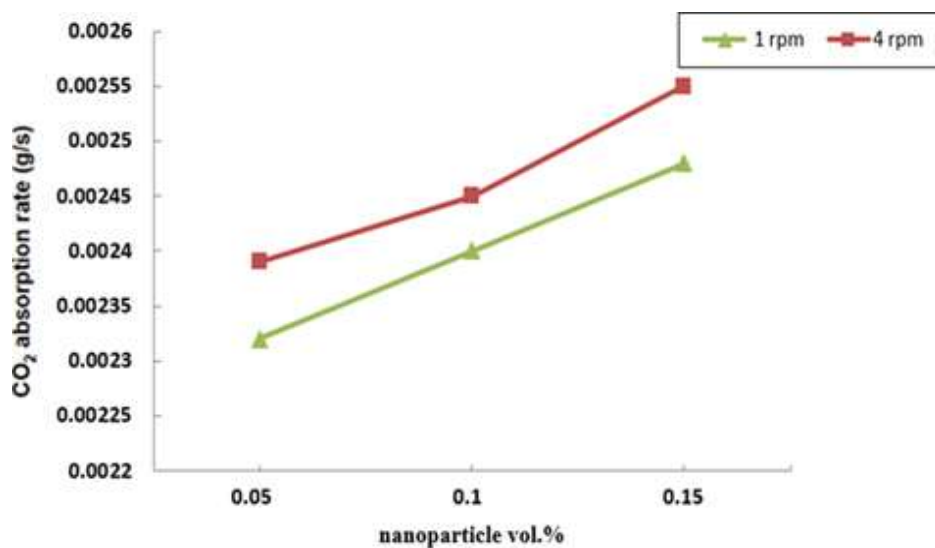


Fig. 11. Shows the impact of stirrer speed on the rate of CO₂ absorption for Al₂O₃ nanoparticles with a size of 100 nm

4.3.3 The impact of Al_2O_3 nanoparticles size

The results of the S/N and ANOVA in this study indicated that the performance of the CO_2 absorption rate was least affected by nanoparticle size. As the size of the nanoparticles increases, the rate of CO_2 absorption decreases. Figure 12 and Figure 13 make the impact of nanoparticle size very evident, which was plotted at two different speeds—1 and 4 rpm using Eq. (3). It is clear that the rate of CO_2 absorption is slowed down when the size of the nanoparticles increases.

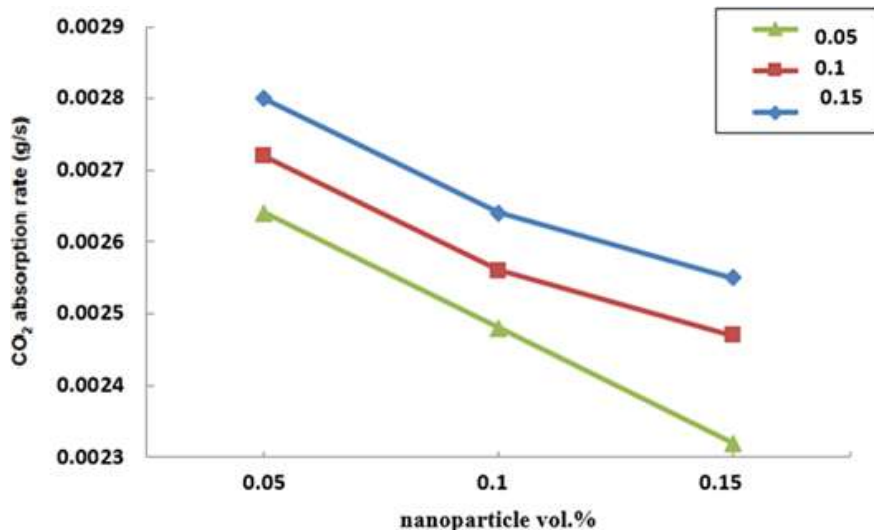


Fig. 12. The impact of Al_2O_3 nanoparticles size at 1 rpm on the rate of CO_2 absorption

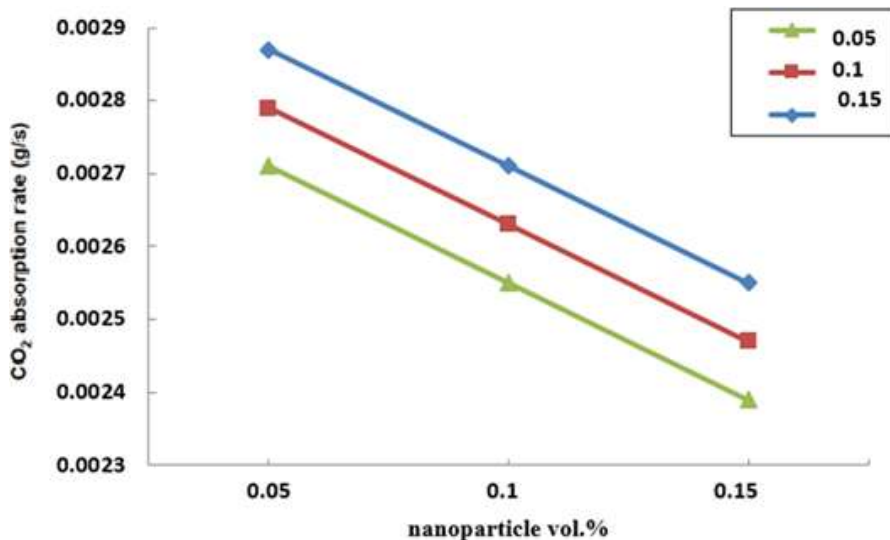


Fig.13. The impact of Al_2O_3 nanoparticles size at 4 rpm on the rate of CO_2 absorption

5. Conclusion

The current study treats flue gas through the use of nanofluid in the CO_2 absorption process. To find out how the size, concentration, and stirrer speed of the nanoparticles affected the rate of CO_2 absorption, these factors were investigated.

The nanofluid parameters were optimized using the Taguchi method. The S/N and ANOVA results, which were in this order: stirrer speed > nanoparticle size > concentration of nanoparticles, confirmed the significance of the nanoparticle parameters. The ideal parameters were 4 rpm, 60 nm, and 0.1 vol. %. The present study's results indicate that the three most important parameters were the size, concentration, and stirrer speed of the nanoparticles. Shown a moderate impact on the rate of CO₂ absorption in earlier research. Under ideal circumstances, two confirmation tests produced CO₂ absorption rates greater than 0.00293 g/s.

References

- [1] Shakir, Safa Waleed, S. M. Ahmed, and Ahmed Daham Wiheeb. "Improvement of CO₂ Absorption/Desorption Rate Using New Nano-Fluid." *International Journal of Heat & Technology* 39, no. 3 (2021): 851-857. <https://doi.org/10.18280/ijht.390319>
- [2] Shakir, Safa Waleed, Ahmed Daham Wiheeb, and Mohd Roslee Othman. "Captura melhorada de dióxido de carbono por nanofluidos contendo nanopartículas inorgânicas e líquido orgânico de ligação." *Periódico Tchê Química* 17, no. 36 (2020). https://doi.org/10.52571/PTQ.v17.n36.2020.703_Periodico36_pgs_688_705.pdf
- [3] Manisalidis, Ioannis, Elisavet Stavropoulou, Agathangelos Stavropoulos, and Eugenia Bezirtzoglou. "Environmental and health impacts of air pollution: a review." *Frontiers in Public Health* 8 (2020): 14. <https://doi.org/10.3389/fpubh.2020.00014>
- [4] Radu, Olivia Braspenning, Maarten van den Berg, Zbigniew Klimont, Sebastiaan Deetman, Greet Janssens-Maenhout, Marilena Muntean, Chris Heyes, Frank Dentener, and Detlef P. van Vuuren. "Exploring synergies between climate and air quality policies using long-term global and regional emission scenarios." *Atmospheric Environment* 140 (2016): 577-591. <https://doi.org/10.1016/j.atmosenv.2016.05.021>
- [5] Munang, Richard, Ibrahim Thiaw, Keith Alverson, Musonda Mumba, Jian Liu, and Mike Rivington. "Climate change and Ecosystem-based Adaptation: a new pragmatic approach to buffering climate change impacts." *Current Opinion in Environmental Sustainability* 5, no. 1 (2013): 67-71. <https://doi.org/10.1016/j.cosust.2012.12.001>
- [6] Carpenter, A., Eliza Hotchkiss, and Alicen Kandt. *Interagency Pilot of Greenhouse Gas Accounting Tools: Lessons Learned*. No. NREL/TP-7A40-56602. National Renewable Energy Lab.(NREL), Golden, CO (United States), 2013. <https://doi.org/10.2172/1064548>
- [7] Scripps Institution of Oceanography. "A daily record of global atmospheric carbon dioxide concentration." *UC San Diego* (2020). <https://scripps.ucsd.edu/programs/keelingcurve>.
- [8] Zhang, Xiaojing, Pawel Wargocki, Zhiwei Lian, and Camilla Thyregod. "Effects of exposure to carbon dioxide and bioeffluents on perceived air quality, self-assessed acute health symptoms, and cognitive performance." *Indoor Air* 27, no. 1 (2017): 47-64. <https://doi.org/10.1111/ina.12284>
- [9] McNeil, Ben I., and Tristan P. Sasse. "Future ocean hypercapnia driven by anthropogenic amplification of the natural CO₂ cycle." *Nature* 529, no. 7586 (2016): 383-386. <https://doi.org/10.1038/nature16156>
- [10] Augusto, Alessandra, Andressa C. Ramaglia, and Paulo V. Mantoan. "Effect of carbon dioxide-induced water acidification and seasonality on the physiology of the sea-bob shrimp *Xiphopenaeus kroyeri* (Decapoda, Penaeidae)." *Crustaceana* 91, no. 8 (2018): 947-960. <https://doi.org/10.1163/15685403-00003807>
- [11] Marlon, Jennifer R., Brittany Bloodhart, Matthew T. Ballew, Justin Rolfe-Redding, Connie Roser-Renouf, Anthony Leiserowitz, and Edward Maibach. "How hope and doubt affect climate change mobilization." *Frontiers in Communication* 4 (2019): 20. <https://doi.org/10.3389/fcomm.2019.00020>
- [12] Fujimoto, N., Hattori, K., and Yamaguchi, F. *U.S. Patent No. 9,399,192*. Washington, DC: U.S. Patent and Trademark Office, 2016.
- [13] Rocha, Juliana Almeida, V. de A. Royo, and Elytânia Veiga Menezes. "Biodiesel production and paper chromatography in organic chemistry teaching." *Periódico Tchê Química* 13, no. 26 (2016): 52-58. https://doi.org/10.52571/PTQ.v13.n26.2016.52_Periodico26_pgs_52_58.pdf
- [14] Wiheeb, A. D., S. W. Shakir, M. A. Ahmed, and E. A. Rajab. "Experimental investigation of carbon dioxide capturing into aqueous carbonate solution promoted by alkanolamine in a packed absorber." In *2018 1st International Scientific Conference of Engineering Sciences-3rd Scientific Conference of Engineering Science (ISCES)*, pp. 152-156. IEEE, 2018. <https://doi.org/10.1109/ISCES.2018.8340545>
- [15] Araújo, Ofélia de Queiroz Fernandes, and José Luiz de Medeiros. "Carbon capture and storage technologies: present scenario and drivers of innovation." *Current Opinion in Chemical Engineering* 17 (2017): 22-34. <https://doi.org/10.1016/j.coche.2017.05.004>

- [16] Conway, William, Qi Yang, Susan James, Chiao-Chien Wei, Mark Bown, Paul Feron, and Graeme Puxty. "Designer amines for post combustion CO₂ capture processes." *Energy Procedia* 63 (2014): 1827-1834. <https://doi.org/10.1016/j.egypro.2014.11.190>
- [17] Meldon, Jerry H., and Miguel A. Morales-Cabrera. "Analysis of carbon dioxide absorption in and stripping from aqueous monoethanolamine." *Chemical Engineering Journal* 171, no. 3 (2011): 753-759. <https://doi.org/10.1016/j.cej.2011.05.099>
- [18] Budiman, Harry, and Oman Zuas. "Validation of analytical method for determination of high level carbon dioxide (CO₂) in nitrogen gas (N₂) matrix using gas chromatography thermal conductivity detector." *Periódico Tchê Química* 12, no. 24 (2015). https://doi.org/10.52571/PTQ.v12.n24.2015.7_P_24_pgs_7_16.pdf
- [19] Qamar, Rizwan Ahmed, Asim Mushtaq, Ahmed Ullah, and Zaeem Uddin Ali. "Aspen HYSYS simulation of CO₂ capture for the best Amine solvent." *Journal of Advanced Research in Fluid Mechanics and Thermal Sciences* 68, no. 2 (2020): 124-144. <https://doi.org/10.37934/arfmts.68.2.124144>
- [20] Hemmati, Abbas, Reza Farahzad, A. Surendar, and Behrad Aminahmadi. "Validation of mass transfer and liquid holdup correlations for CO₂ absorption process with methyldiethanolamine solvent and piperazine as an activator." *Process Safety and Environmental Protection* 126 (2019): 214-222. <https://doi.org/10.1016/j.psep.2019.02.030>
- [21] Olajire, Abass A. "CO₂ capture and separation technologies for end-of-pipe applications-A review." *Energy* 35, no. 6 (2010): 2610-2628. <https://doi.org/10.1016/j.energy.2010.02.030>
- [22] Zhang, Jian, Igor Kutnyakov, Phillip K. Koech, Andy Zwoster, Chris Howard, Feng Zheng, Charles J. Freeman, and David J. Heldebrant. "CO₂-binding-organic-liquids-enhanced CO₂ capture using polarity-swing-assisted regeneration." *Energy Procedia* 37 (2013): 285-291. <https://doi.org/10.1016/j.egypro.2013.05.113>
- [23] Liu, Fan, Guohua Jing, Bihong Lv, and Zuoming Zhou. "High regeneration efficiency and low viscosity of CO₂ capture in a switchable ionic liquid activated by 2-amino-2-methyl-1-propanol." *International Journal of Greenhouse Gas Control* 60 (2017): 162-171. <https://doi.org/10.1016/j.ijggc.2017.03.017>
- [24] Wang, Chao, Zhijie Xu, Canhai Lai, and Xin Sun. "Beyond the standard two-film theory: Computational fluid dynamics simulations for carbon dioxide capture in a wetted wall column." *Chemical Engineering Science* 184 (2018): 103-110. <https://doi.org/10.1016/j.ces.2018.03.021>
- [25] Salman, Rasha H. "Removal of manganese ions (Mn²⁺) from a simulated wastewater by electrocoagulation/electroflotation technologies with stainless steel mesh electrodes: process optimization based on Taguchi approach." *Iraqi Journal of Chemical and Petroleum Engineering* 20, no. 1 (2019): 39-48. <https://doi.org/10.31699/IJCPE.2019.1.6>
- [26] Singh, Aruna, Yash Sharma, Yasaswy Wupardrasta, and Karan Desai. "Selection of amine combination for CO₂ capture in a packed bed scrubber." *Resource-Efficient Technologies* 2 (2016): S165-S170. <https://doi.org/10.1016/j.reffit.2016.11.014>
- [27] Shakir, Safa Waleed, Sarah Saad Mohammed Jawad, and Zainab Abdulmaged Khalaf. "Analysis of the Impact of Nanofluids on the Improvement in CO₂ Absorption using Taguchi Method." *Journal of Advanced Research in Fluid Mechanics and Thermal Sciences* 115, no. 1 (2024): 83-98. <https://doi.org/10.37934/arfmts.115.1.8398>