

14 Mar 1991, 10:30 am - 12:30 pm

Dynamic Strength of Gravelly Soils and Its Relation to the Penetration Resistance

Y. Tanaka

Central Research Institute of Electric Power Industry (CRIEPI), Japan

K. Kudo

Central Research Institute of Electric Power Industry (CRIEPI), Japan

K. Kokusho

Central Research Institute of Electric Power Industry (CRIEPI), Japan

Y. Yoshida

Central Research Institute of Electric Power Industry (CRIEPI), Japan

Follow this and additional works at: <https://scholarsmine.mst.edu/icrageesd>



Part of the [Geotechnical Engineering Commons](#)

Recommended Citation

Tanaka, Y.; Kudo, K.; Kokusho, K.; and Yoshida, Y., "Dynamic Strength of Gravelly Soils and Its Relation to the Penetration Resistance" (1991). *International Conferences on Recent Advances in Geotechnical Earthquake Engineering and Soil Dynamics*. 16.

<https://scholarsmine.mst.edu/icrageesd/02icrageesd/session03/16>



This work is licensed under a [Creative Commons Attribution-Noncommercial-No Derivative Works 4.0 License](#).

This Article - Conference proceedings is brought to you for free and open access by Scholars' Mine. It has been accepted for inclusion in International Conferences on Recent Advances in Geotechnical Earthquake Engineering and Soil Dynamics by an authorized administrator of Scholars' Mine. This work is protected by U. S. Copyright Law. Unauthorized use including reproduction for redistribution requires the permission of the copyright holder. For more information, please contact scholarsmine@mst.edu.



Dynamic Strength of Gravelly Soils and Its Relation to the Penetration Resistance

Y. Tanaka

Senior Research Engineer, Central Research Institute of Electric Power Industry (CRIEPI), Abiko City, Japan

K. Kokusho

Manager of Siting Technology Department, CRIEPI, Abiko City, Japan

K. Kudo

Senior Research Engineer, CRIEPI, Abiko City, Japan

Y. Yoshida

Principal Research Engineer, CRIEPI, Abiko City, Japan

SYNOPSIS : Undrained cyclic triaxial tests have been conducted on specimens of dense diluvial gravelly soils taken from four sites by an in-situ freeze sampling method. The test results and previous test results obtained by other researchers suggest that the dynamic strength of gravelly soils can be evaluated based on both the modified blow count of the penetration tests and on the effective confining pressure. A method for the evaluation by utilizing the large penetration test (LPT) blow counts is proposed in this paper by considering the effect of the effective confining pressure on the dynamic strength.

INTRODUCTION

Dense gravelly ground is usually considered to have sufficient bearing capacity without any accurate evaluation of its mechanical properties because of its large STP blow count (N-value). Recently, as important structures are being constructed increasingly on dense gravelly ground, accurate evaluation of the mechanical properties of gravelly soils is needed more than ever. This paper investigates the relevance of the blow counts of dynamic penetration tests as indexes for evaluating in-situ dynamic strengths of gravelly soils by field and laboratory tests. Field tests were performed at four sites : A, K, T and KJ, where the in-situ freeze sampling was performed along with dynamic penetration tests in nearby boreholes (Kataoka et al., 1989). The dynamic strength of undisturbed gravelly soil samples measured by large-scale undrained cyclic triaxial tests mainly under in-situ effective confining pressure was compared with the penetration resistance to establish their correlations and to study influencing factors on them. In this paper, the dynamic strength is defined as the stress ratio which is required to reach the double axial strain amplitude $DA=2\%$ or 2.5% in 20 loading cycles.

UNDRAINED CYCLIC TRIAXIAL TESTS ON GRAVELLY SOILS OBTAINED BY IN-SITU FREEZE SAMPLING

Site A

The soil profile at this site is shown in Fig.1. The gravelly soil of diluvial origin was investigated at depths of 3.3 m to 10.0 m from the ground surface. A Large Penetration Test (LPT), which was first introduced by Kaito et al.(1971) for testing gravelly soils, was performed. The LPT penetration resistance, N_d -value, was about 20 for the upper gravelly layer (GL -3.3 m to -5.0 m), and about 30 for the lower gravelly layer (GL -7.0 m to -10.0 m). 100 mm diameter samples were obtained by in-situ freeze sampling. The groundwater level was 1.0 m from the ground surface. The grain size distribution shown in Fig. 2 indicates that the maximum grain size is about 20 to 40 mm and that the fines content is

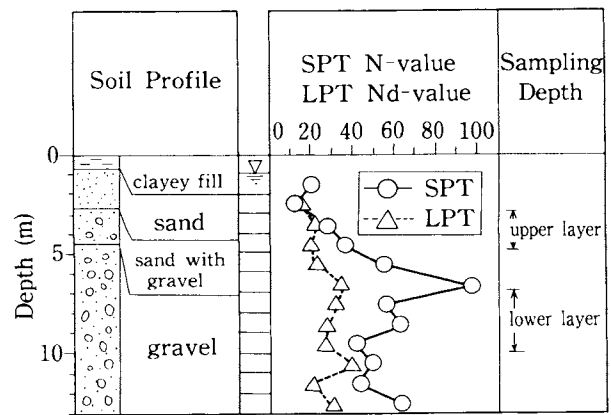


Fig. 1 Soil profile at Site A

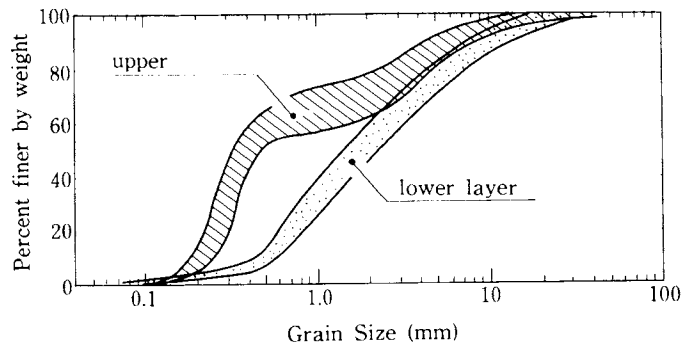


Fig. 2 Typical grain size distributions of Site A gravelly soils sampled by in-situ freeze sampling

less than 2.0%. The results of the undrained cyclic triaxial tests are shown in Fig. 3. For the upper-layer samples, the stress ratios that are required to reach the double axial strain amplitude $DA = 2\%$ and 5% in 20 loading cycles are 0.42 and 0.50, respectively. For the lower-layer samples, the same stress ratios were 0.34 and 0.38, respectively.

The in-situ freeze sampling was first conducted in 1984 and again in 1987. In the second (1987) sampling, double-tube core barrels with diamond teeth were used to obtain samples with smooth lateral surfaces, whereas barrels with metal teeth were used in the first (1984) sampling. Figure 4 shows the results of the undrained cyclic triaxial tests on the lower-layer samples obtained in the second sampling. The stress ratios required to reach $DA = 2\%$ at $N_c = 20$ range from 0.40 to 0.60 which is slightly higher than the results shown in Fig. 3(b).

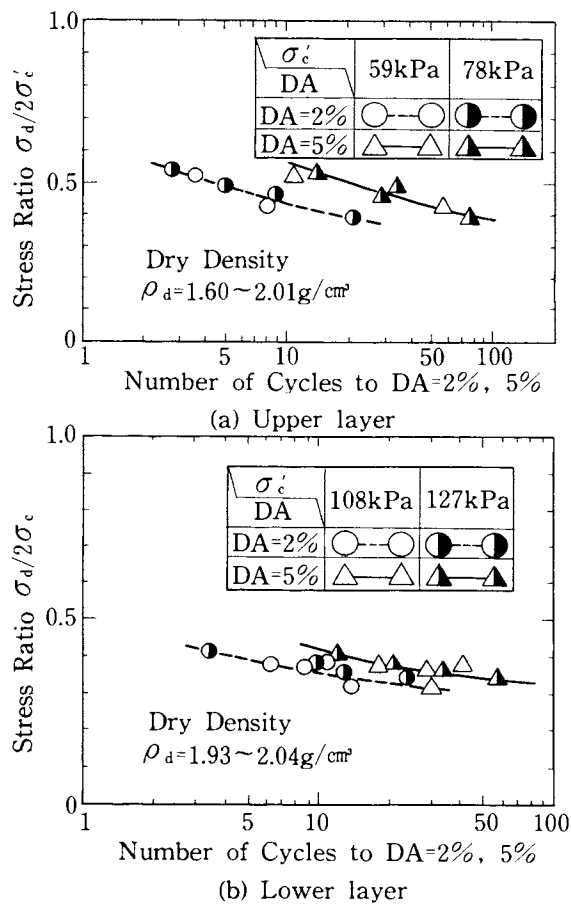


Fig. 3 Dynamic strength of Site A gravelly soils sampled by in-situ freeze sampling

Site K

The gravelly soil at this site is called the Tachikawa Gravel Layer and is a dense well-graded 20,000 year old gravelly deposit. The soil profile is shown in Fig. 5. The sampling depth was 6.0 m to 8.1 m from the ground surface. The penetration resistance, N-value, of the standard penetration test (SPT) was from 110 to 140. 300 mm diameter samples were obtained by in-situ freeze sampling. The groundwater level was 6.7 m from the ground surface.

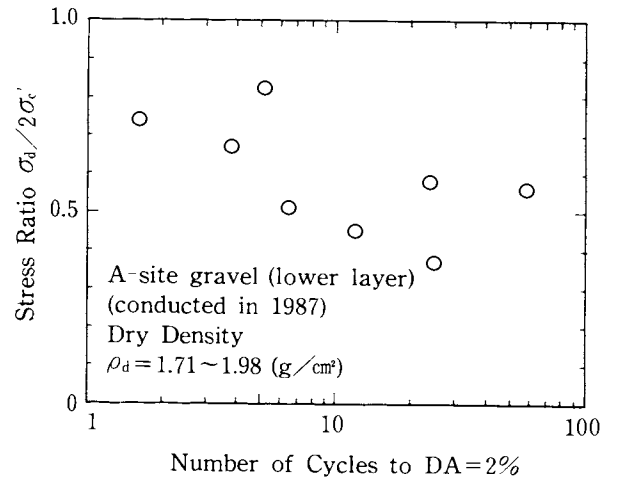


Fig. 4 Dynamic strength of Site A gravelly soils sampled by in-situ freeze sampling (Second sampling conducted in 1987)

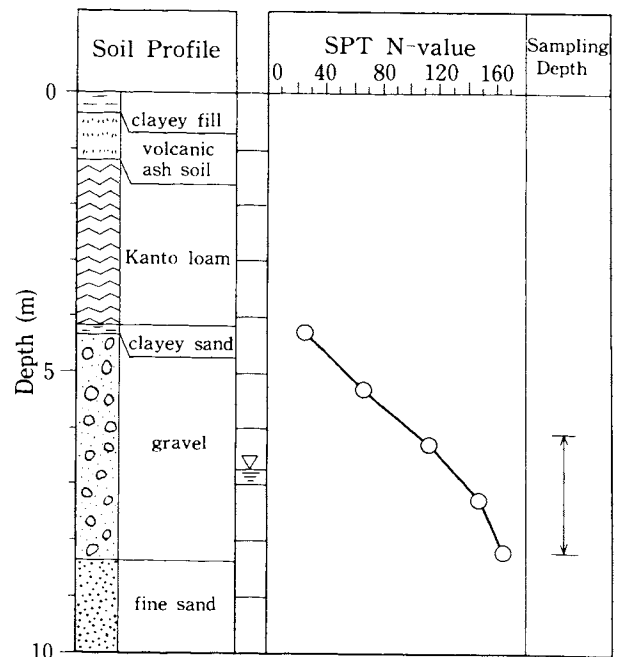


Fig. 5 Soil profile at Site K

The grain size distributions shown in Fig. 6 indicates that the maximum grain size is about 100 to 150 mm and that the fines content is less than 2.0%. The stress ratios for the double axial strain amplitude $DA = 2\%$ and 5% in 20 loading cycles measured on the undisturbed samples are 1.13 and 1.50, respectively, as shown in Fig. 7.

Site T

The soil profile at site T is shown in Fig. 8. The age of this gravelly soil deposit was estimated to be about 30,000 years by radio-carbon dating of wooden chips. The sample depth was 10.4 m to 19.1 m from the ground surface. The LPT penetration resistance, N_d -value, was about 30 for the upper-layer (GL -10.4 m to -15.5 m), and about 25 for the lower-layer (GL -15.5 m to -19.1 m). 300 mm diameter

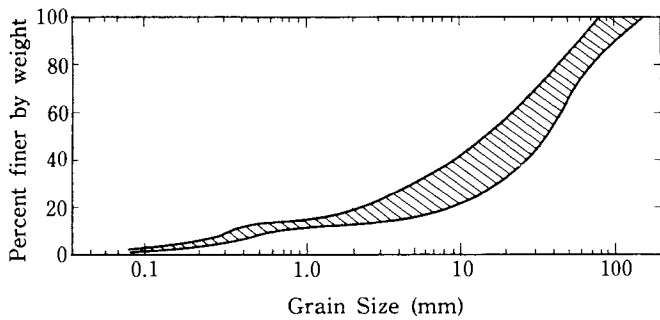


Fig. 6 Typical grain size distributions of Site K gravelly soils sampled by in-situ freeze sampling

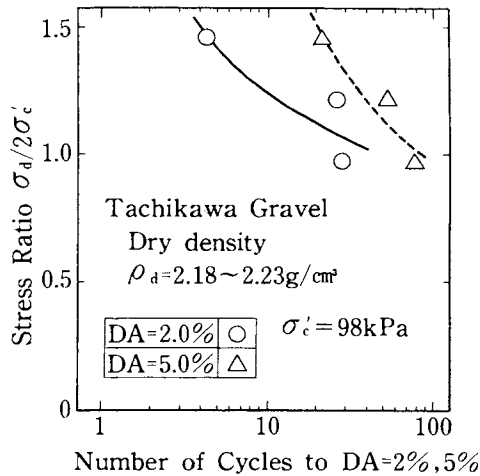


Fig. 7 Dynamic strength of Site K gravelly soils sampled by in-situ freeze sampling

samples were obtained by in-situ freeze sampling. The groundwater level was 3.0 m from the ground surface. As Fig. 9 shows, the maximum grain size was about 50 to 200 mm and the fines contents of the upper and lower layers were less than 5.0% and 8.1%, respectively.

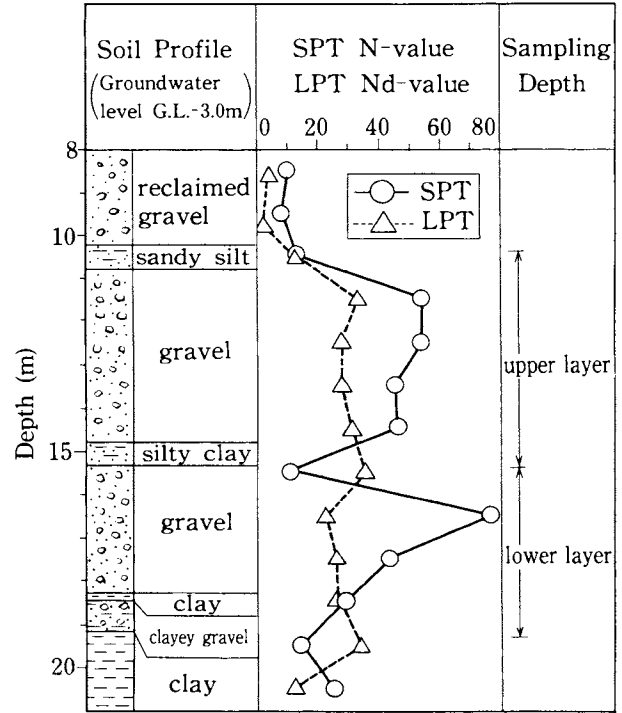


Fig. 8 Soil profile at Site T



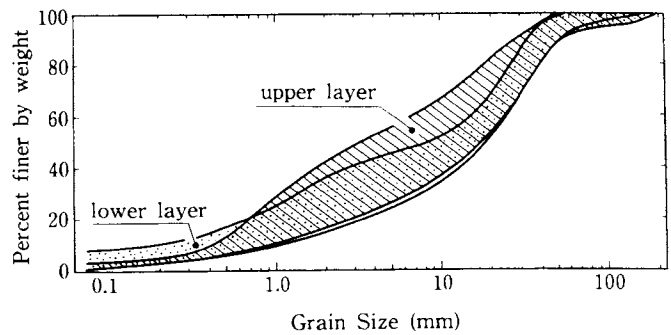


Fig. 9 Typical grain size distributions of Site T gravelly soils sampled by in-situ freeze sampling

Figure 10 shows the results of the undrained cyclic triaxial tests. For the upper-layer samples, the stress ratios for the double axial strain amplitude DA = 2% and 5% in 20 loading cycles were 0.42 and 0.56, respectively. Whereas, for the lower-layer samples, the same stress ratios were 0.29 and 0.33, respectively. The results of the undrained cyclic triaxial tests, in which the upper-layer samples were consolidated under an isotropic stress of 441 kPa and which is higher than the effective overburden pressure, are shown in Fig. 11. The same

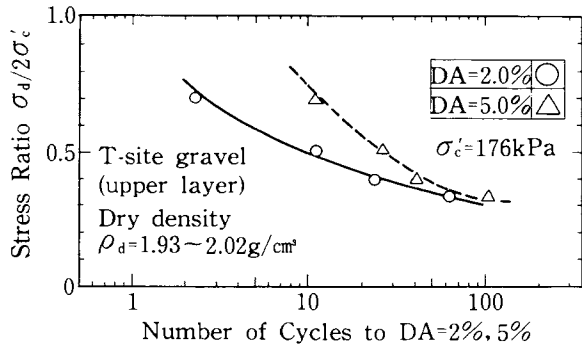

(a) Upper layer

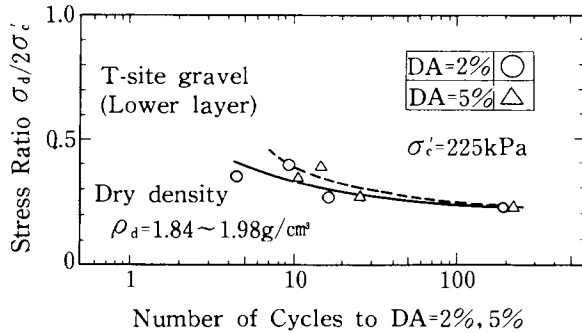

(b) Lower layer

Fig. 10 Dynamic strength of Site T gravelly soils sampled by in-situ freeze sampling

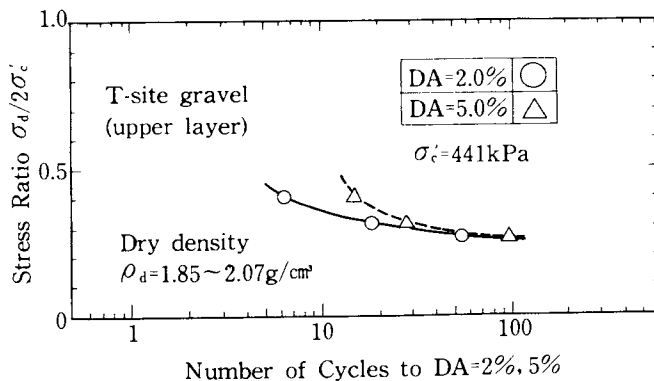


Fig. 11 Dynamic strength of Site T gravelly soils sampled by in-situ freeze sampling (for large confining pressure)

stress ratios in this case were 0.31 and 0.35, respectively. Both the test results of $\sigma'_c = 176$ kPa and 441 kPa are plotted on the same graph shown as Fig. 12. The stress ratio seems to decrease as the confining pressure increases. This trend has also been noted for undisturbed dense Niigata sand by Yoshimi et al. (1984).

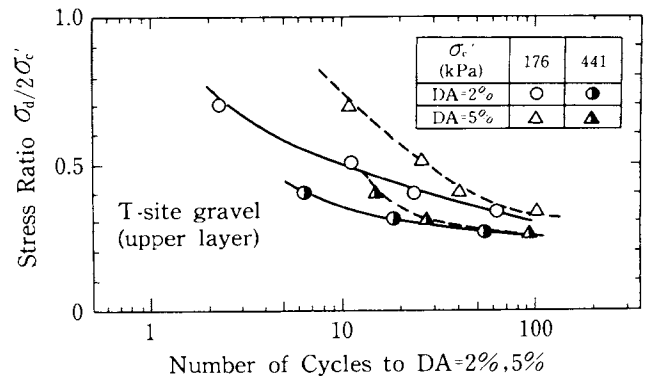


Fig. 12 The effects of confining pressure on the dynamic strengths of Site T gravelly soils

Site KJ

The soil profile at site KJ is shown in Fig. 13. This gravelly deposit of diluvial origin was investigated at depths of 15.6 m to 17.5 m from the ground surface. The LPT penetration resistance, N_d -value, of the gravelly layer was 100. 300 mm diameter samples were obtained by in-situ freeze sampling. The groundwater level was 1.1 m from the ground surface. As Fig. 14 shows, the maximum grain size was about 40 to

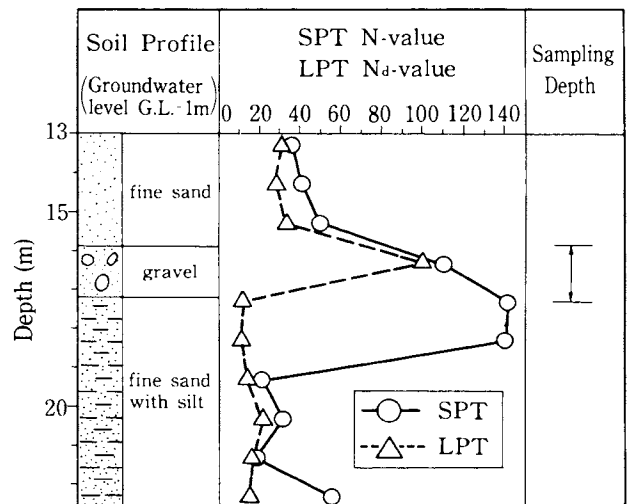


Fig. 13 Soil profile at Site KJ

60 mm and the fines content was less than 3.9%. Figure 15 shows, the results of the undrained cyclic triaxial tests. The stress ratios for the double axial strain amplitude DA = 2% and 5% in 20 loading cycles were 1.27 and 1.40, respectively.

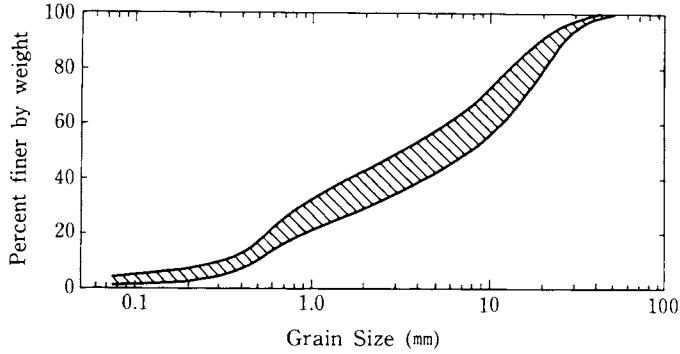


Fig. 14 Typical grain size distributions of Site KJ gravelly soils sampled by in-situ freeze sampling

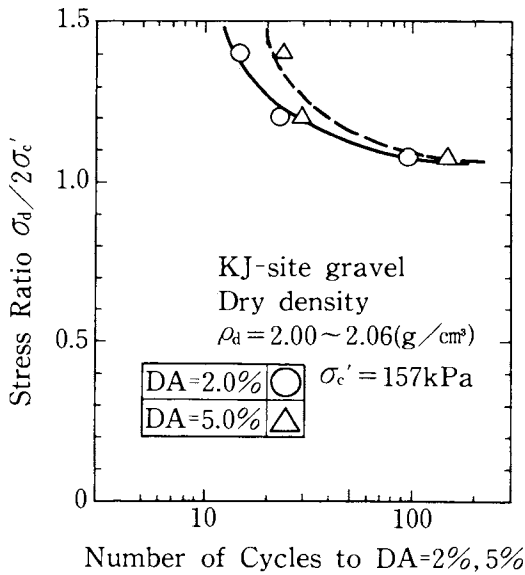


Fig. 15 Dynamic strength of Site KJ gravelly soils sampled by in-situ freeze sampling

RELATIONSHIP BETWEEN DYNAMIC STRENGTH AND PENETRATION RESISTANCE

EMPIRICAL CORRELATIONS BASED ON SPT AND LPT

As described previously, we conducted a series of field and laboratory tests, including undrained triaxial tests on undisturbed samples and penetration tests on the same soils. Several similar tests have been also conducted recently by other researchers on some kinds of gravelly soil deposits. Table 1 summarizes the results of all these field tests in which in-situ freeze sampling as well as penetration tests at nearby boreholes were carried out.

Figure 16 represents the relationships between the dynamic strengths and the penetration resistance. The vertical axis corresponds to the dynamic strength in terms of the stress ratio for DA = 2% or 2.5% in 20 loading cycles; the horizontal axis is to the modified SPT blow count, N_1 . N -value was modified in terms of the effective overburden pressure to give N_1 according to the equation

$$N_1 = N / (\sigma'_v / P_1)^{0.5}, \quad (1)$$

$$P_1 = 98 \text{ kPa}$$

proposed by Liao et al. (1986). The effective confining pressures, σ'_c , of 69 to 127 kPa in the triaxial tests on these gravels, were all assumed to equal the in-situ effective overburden pressures. Similar data for sands

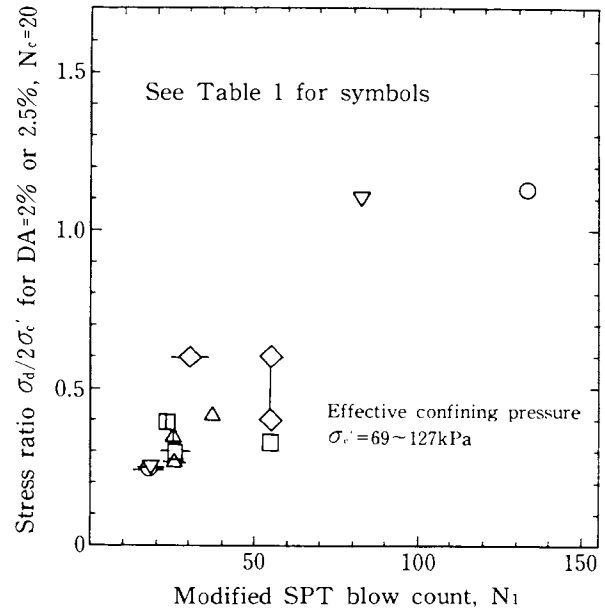


Fig. 16 Dynamic strength vs. SPT N_1 -value ($\sigma'_c = 69 \sim 127 \text{ kPa}$)

suitable to investigation of gravelly soils.

THE EFFECT OF CONFINING PRESSURE

Table 1. Symbols in Figs. 16, 17 and 18

Soils	Soil sample description	References	σ_c' kPa	Symbols
	Site K		98	○
	Site T		176	▲
	upper layer		225	■
	lower layer		157	▼
	Site KJ	This investigation	69	△
Gravelly Soils	Site A (conducted in 1984)		118	□
	upper layer		98	◇
	lower layer		118	▽
	Site A (conducted in 1987)		98	◇
	lower layer		118	▽
	Mandano Gravel	Tamaoki, et al. (1986) Goto, et al. (1987)	294	●
	Tokyo Gravel	Hatanaka, et al. (1986) Hatanaka, et al. (1988) (1989b)	78	▲
	Samples obtained near the Tonegawa river	Nishio, et al. (1989)	127	□
	upper layer		98	◇
	lower layer	Hatanaka, et al. (1989a)	78	○
	Niigata sand	Yoshimi, et al. (1984)	88	▲
	C ₁		98	□
Sands	Meike site	Yoshimi, et al. (1989)	98	▽
	C ₂		98	□
	C ₃		98	▽
	Showa Bridge site		98	▽

As mentioned previously, Figure 12 shows that the dynamic strength of undisturbed gravelly soil samples decreases as the effective confining pressure σ_c' increases beyond the effective overburden pressure. Since the samples, the test results of which are shown in Fig. 12, are taken from the same soil layer, the modified LPT blow counts N_{d1} of the samples are the same. This indicates that under different confining pressures no unique relationship between the modified LPT blow count N_{d1} and the dynamic strength exists any more. Since the relationship between the modified LPT blow count and the dynamic strength is affected by the effective confining pressure, the establishment of this relationship must be considered for the same effective confining pressure.

The plots in Fig. 17 represent data for the effective confining pressure, σ_c' of 67 kPa to 127 kPa. As previously noted, the relationship between the dynamic strength and the modified LPT blow count, N_{d1} , will be influenced for dense sandy and gravelly soils by the effective confining pressure. This suggests that the in-

obtained from field and laboratory tests under confining pressures, σ_c' , of 78 to 98 kPa are plotted on the same graph. Although these plots indicate a correlation between the dynamic strength and N_1 for gravelly soils, the scatter of the data is rather large. This may be attributed partially to problems associated with the Standard Penetration Test in gravelly soils where the penetration resistance is sensitive to grain size. Another problem is that the size of the test probe and the driving energy are insufficient to match the penetration resistance of gravelly soils.

To overcome these difficulties, the Large Penetration Test is used occasionally in Japan to investigate gravelly deposits. Figure 17 plots the dynamic strengths on the vertical axis against the modified penetration resistances, N_{d1} , of the Large Penetration Test on the horizontal axis instead of N_1 . At some points in this graph where LPT data were not available, N-value was converted based on the empirical relationship (Yoshida et al., 1988). N_{d1} was derived for the effective overburden pressure, σ_v' , of 98 kPa following the same equation used for the N-value modification. Unlike the SPT-based correlation shown in Fig. 16, the LPT-based correlation appears to be more consistent between gravels and sands and also between different gravels. This may indicate that the Large Penetration Test is less sensitive to increasing grain size and is more powerful than the Standard Penetration Test and is thus better

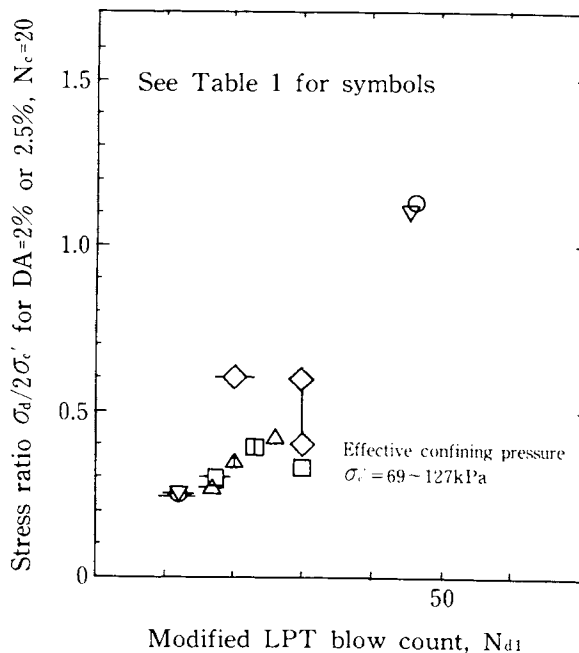


Fig. 17 Dynamic strength vs. LPT N_{d1} -value ($\sigma_c' = 69 \sim 127$ kPa)

situ dynamic strength of dense soils may be overestimated if the relationship in Fig. 17 is applied to deeper layers. It is therefore necessary to estimate the variations in the relationship caused by changes in the effective confining pressure.

Based on a hypothesis that the dynamic strength of sand is closely related to the shape of the effective stress path in static undrained triaxial compression tests, Imai et al. (1975) demonstrated that the relationships between the dynamic strength and negative dilatancy characteristics are not affected by the type of sand or relative density. Assuming that Imai's hypothesis holds for the shape of the stress path in static undrained triaxial compression tests of gravelly soils under a different magnitude of effective confining pressure, the effect of the confining pressure on the dynamic strength can be estimated. A final formula that can estimate the effect quantitatively is expressed in Eq. (2), the derivation of which is available in other literature (Tanaka et al., 1988, Tanaka et al., 1990).

$$\sigma_d / 2\sigma_c' = f \left\{ \left(\frac{\sigma_c'}{P_1} \right)^{-\alpha} \cdot N_{d1} \right\} \quad (2)$$

$\sigma_d / 2\sigma_c'$ in Eq. (2) denotes the dynamic strength. $f(\quad)$ is a function of the LPT blow count and the effective confining pressure. P_1 is equal to 98 kPa. N_{d1} is the modified LPT blow count, and α is a constant determined from the confining pressure dependency on the shear modulus, the rebound modulus and the penetration resistance of gravelly soils (Tanaka et al., 1988, Tanaka et al., 1990).

Eq. (2) indicates that both the increase in σ_c' by Q times and the decrease in N_{d1} by Q^α times have the same effects on the dynamic strength. On the basis of experimental data from natural deposits, the constant α can be approximated by 0.5. By using Eq. (1), Eq. (2) with $\alpha = 0.5$ can be rewritten as follows:

$$\sigma_d / 2\sigma_c' = f \left\{ \left(\frac{\sigma_c'}{P_1} \right)^{1/2} \cdot N_d \right\} \quad (3)$$

Eq. (3) means that the dynamic strength of gravelly soils was solely dependent on the value of $N_d / (\sigma_c' / P_1)$. Thus the dynamic strengths of the soils listed in Table 1 are all plotted in Fig. 18 against $N_d / (\sigma_c' / P_1)$. It may be possible to draw an empirical curve as the solid line shown in Fig. 18. The curve in Fig. 18 is expressed by the following equation.

$$\sigma_d / 2\sigma_c' = 0.15 + 0.0059 \left(\left(\frac{\sigma_c'}{P_1} \right)^{1/2} \cdot N_d \right)^{1.3} \quad (4)$$

Fig. 18 indicates that the equation (4) can be used as a powerful tool for estimating in-situ dynamic strengths of dense gravelly soils for a wide range of effective confining pressures based on the penetration test.

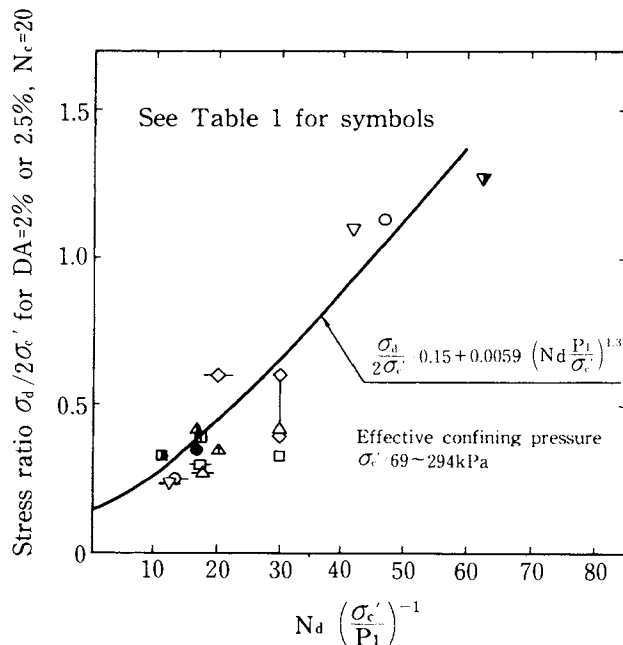


Fig. 18 Dynamic strength vs. $N_d(\sigma_c' / P_a)^{-1}$ ($\sigma_c' = 69 \sim 294$ kPa)

CONCLUSIONS

On the grounds that reliable in-situ dynamic strengths of dense gravelly soils without significant disturbance can be evaluated by in-situ freeze sampling, a series of field and laboratory tests, including undrained triaxial tests on undisturbed samples and penetration tests on the same soils, was conducted to establish an empirical correlation for estimating in-situ dynamic strengths of gravelly soils from penetration resistance. Of the two penetration tests, the LPT was clearly more applicable than the SPT to dense gravelly soils. Also, the effective confining pressure was found to be deeply involved in the correlation. It was shown that the proposed empirical correlation can satisfactorily evaluate the dynamic strength based on the penetration resistance.

ACKNOWLEDGEMENTS

The authors gratefully acknowledge the great work of Mr. T. Kataoka (CRIEPI) and Mr. K. Sakai (Kisojiban Consultants Co., Ltd.) for conducting the successful in-situ freeze sampling.

REFERENCES

- Goto, S., Y. Shamoto, and K. Tamaoki (1987), "Dynamic Properties of Undisturbed Gravel Samples by In-situ Frozen", Proc. 8th Asian Regional Conference on Soil Mechanics and Foundation Engineering, Vol. 1, pp. 233-236.
- Hatanaka, M. and Y. Suzuki (1986), "Cyclic Undrained Shear Strength of a Tokyo Gravel", Proc. of the Symposium on Deformation-Strength Characteristics of Gravelly Soils and Its Testing Method, Japanese Society of SMFE, pp. 95-98, (in Japanese).
- Hatanaka, M., Y. Suzuki, T. Kawasaki and M. Endo (1988), "Cyclic Undrained Shear Properties of High-Quality Undisturbed Tokyo Gravel", Soils and Foundations, Vol. 28, No. 3, pp. 57-68.
- Hatanaka, M., Y. Suzuki, S. Goto, Y. Makihara, H. Oh-oka and K. Tokimatsu (1989a), "A Study on the Method of Estimation on the In-situ Mechanical Properties of Gravelly Soil Layers, - Part 3 Liquefaction Strength of Lower Gravel Strata - ", Proc. 24th Annual Convention of Japanese Society of SMFE, pp. 809-810, (in Japanese).
- Hatanaka, M., Y. Suzuki, T. Kawasaki and M. Endo (1989b), "Dynamic Properties of Undisturbed Tokyo Gravel", Earthquake Geotechnical Engineering, Proc. of Discussion Session on Influence of Local Conditions on Seismic Response, 12th ICSMFE, pp. 107-112.
- Imai, G. and Y. Kawahara (1975), "On the Relationship between Static Properties and Liquefaction Strength", Proc. 10th Annual Convention of Japanese Society of SMFE, pp. 333-336, (in Japanese).
- Kaito, T., S. Sakaguchi, Y. Nishigaki, K. Miki and H. Yukami (1971), "Large Penetration Test", Tsuchi-to-kiso, No. 629, pp. 15-21, (in Japanese).
- Kataoka T., Y. Yoshida, T. Okamoto and T. Kokusho (1989), "Applicability and Development of In-situ Freezing Sampling Method to Sandy and Gravelly Soils", Report No. U88073, Central Research Institute of Electric Power Industry, (in Japanese).
- Liao, S. and R. V. Whiteman (1986), "Overburden Correction Factors for SPT in Sand", Journ. of G. E., ASCE, Vol. 112, No. 3, pp. 373-377.
- Nishio, S., S. Goto, Y. Suzuki, Y. Makihara, H. Oh-oka and K. Tokimatsu (1989), "A Study on the Method of Estimation on the In-situ Mechanical Properties of Gravelly Soil Layers, - Part 2 Liquefaction Strength of Upper Gravel Strata -", Proc. 24th Annual Convention of Japanese Society of SMFE, pp. 807-808, (in Japanese).
- Tamaoki, K. and Y. Shamato (1986), "An Evaluation Method of Mechanical Properties on Diluvial Gravels Utilizing Freezing Undisturbed Sampling (S-wave Velocity of Sample and PS Logging)", Proc. of Annual Convention of Architectural Institute of Japan, pp. 1201-1202, (in Japanese).
- Tanaka, Y., K. Kudo, Y. Yoshida, T. Kataoka and T. Kokusho (1988), "A Study on the Mechanical Properties of Sandy Gravel, - Mechanical Properties of Undisturbed Sample and Its Simplified Evaluation - ", Report No. U88021, Central Research Institute of Electric Power Industry, (in Japanese).
- Tanaka, Y., K. Kudo, Y. Yoshida and T. Kokusho (1990), "Dynamic Strength Evaluation of Gravelly Soils", A Report of Central Research Institute of Electric Power Industry, in progress.
- Yoshida, Y., T. Kokusho, and M. Ikemi (1988), "Empirical Formulas of SPT Blow-Counts for Gravelly Soils", Proc. of Penetration Testing 1988, Vol. 1, pp. 381-387.
- Yoshimi, Y., K. Tokimatsu, O. Kaneko and Y. Makihara (1984), "Undrained Cyclic Shear Strength of a Dense Niigata Sand", Soils and Foundations, Vol. 24, No. 4, pp. 131-145.
- Yoshimi, Y., K. Tokimatsu and Y. Hosaka (1989), "Evaluation of Liquefaction Resistance of Clean Sands Based on High Quality Undisturbed Samples", Soils and Foundations, Vol. 29, No. 1, pp. 93-104.